

HFE-140B Upright Reach in Freezer

Product Features

- Operating ambient 5°C to 43°C (tropical conditions)
- Cabinet temperature microprocessor controlled and adjustable from -25°C to -7°C
- DC evaporator fans, 80% more energy efficient than AC fans
- 76mm lockable castors
- Energy saving computer controlled frame heater eliminating condensation on exterior
- Stainless steel interior and exterior
- Removable door gaskets for easy cleaning
- GASTRONORM specification standard
- Integral Refrigeration
- HRE-70 and HFE-70 standard with 4 shelves
- HRE-140 and HFE-140 standard with 8 shelves
- 2 years parts and labour warranty

Range

- HRE-70B
- HRE-140B
- HFE-70B
- HFE-140B











hoshizaki.com.au 1 of 2

HFE-140B Upright Reach in Freezer



Product Specifications

Dimensions

Width: 1400 mm Depth: 850 mm Height: 2015 mm

Inside Dimensions

Width: 1296 mm Depth: 678 mm Height: 1484 mm

Packed Dimensions

Carton (Wooden Pallet) Width: 1450 mm Depth: 940 mm Height: 2100 mm

Weight

Net: 174kg Packed: 199kg

AC Supply Voltage 220-240/50/1

Electric Circuit Protection
 Earth Wire, Circuit Breaker

Exterior

Stainless Steel, Galvanized Steel (Rear, Bottom)

Interior

Stainless Steel

Amperage

3.79

· Refrigeration System

Forced Air Circulation Interior Fan DC12V 4W x 3

Defrost System

Heater

• Temperature Control

Microprocessor (Digital temp. indication)
Adjustable from -25°C to -7°C

Defrost Control

Microprocessor

Drain Evaporator Pan

Stainless steel, 170W

Castor

Urethane (76mm DIA, 115mm High)

Effective Capacity

Approx. 1372L

Insulation

Polyurethane foam

Refrigerant


R404a

Heat Rejection

1330W

Operating Conditions

Ambient temperature: 5 – 43°C

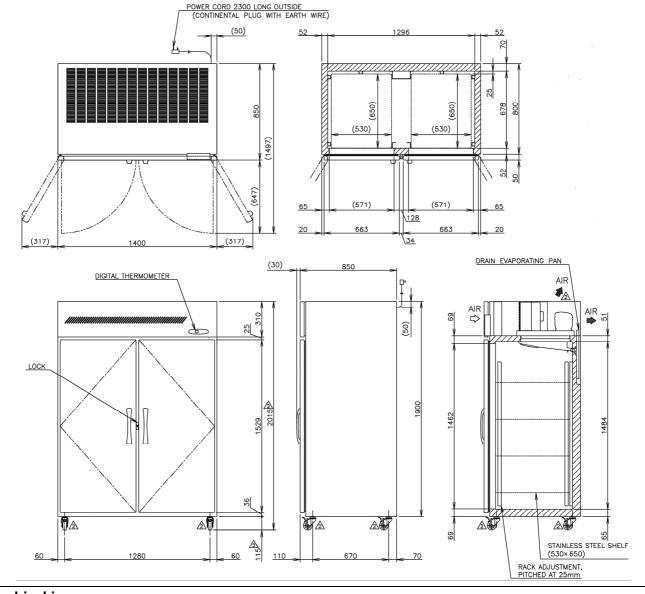

hoshizaki.com.au 2 of 2