



# AF Series Self Contained Flake Ice Machine - up to 67kg AF 80 AS Flake Ice - residual water content 25%



residual water content 25%



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.

- Up to 67kg daily production rate
- 25kg storage bin capacity
- Air cooled version
- Stainless steel auger and freezing cylinder evaporator
- Water in / ice out concept limits excess energy, water and time wastage
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Simple, reliable electromechanic controls
- Clean alert indicator to clean filter
- Resistant stainless steel exterior
- Easy access front condenser air filter
- External indicator lights to show operation status
- Includes removable air filter, ice scoop, water and drain hose





















# AF Series Self Contained Flake Ice Machine - up to 67kg

# **AF 80 AS**

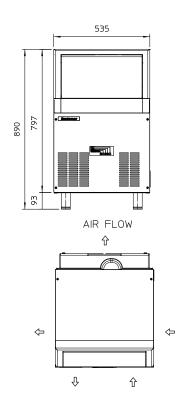



UNIT OF MEASUREMENT: mm

1. 13/16" WATER OUTLET

2. 3/4" - WATER INLET


4. 3/4" - WATER INLET

5. CORD SET

3. 3/4" - WATER OUTLET

WATER COOLED UNIT ONLY

WATER COOLED UNIT ONLY



# 3 475



#### moffat.com.au

Australia Moffat Pty Limited

#### Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9518 3833 vsales@moffat.com.au

## New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

#### South Australia

Telephone 03-9518 3888 vsales@moffat.com.au

#### Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

#### Western Australia

Telephone 08-9413 2400 wasales@moffat.com.au

# Ice production per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
70	67	53

### Dimensions

Width: 535mm Depth: 620mm

Height: 890mm (including legs)

Nett weight: 50kg Packed weight: 58kg

#### Water consumption

Air cooled version: 2.2 litres per hour

# Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 340W,

10A cordset supplied

No. Circuit wire: 3 Compressor: 790W Energy consumption: 6.9kW/hr

# Refrigerant type

R134A

Installation distance from wall

Rear 100mm Sides 50mm

Operating requirement air temperature 10-43°C

## Water connection requirements

Inlet connection: R ¾"
Cold water: 5-35°C
Pressure: 100-500kPa
Water outlet connection: ؾ"

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd