
## Controlled Ambient Integral 3000 Series



Designed with price in mind these cabinets suit the smaller café, kiosk and C-store. The Inline 3000 still comes with many of the features associated with the higher priced models such as moving air refrigeration. The Inline 3000's unique construction allows the cabinet to be counter mounted. The Inline 3000 comes packed with features to enhance food presentation.

### **OPTIONS:**







**FEATURES** 

- Stainless steel construction
- Toughened double glazed glass
- Front sliding doors (SD)
- Fixed front (FF)
- Rear sliding doors
- Cabinet top lighting
- Adjustable shelving
  - Height: 25.4mm Increments
  - Angle: Flat or 10° Pitch
- Stainless steel flat travs
- Shelf mounted ticket strip, front and rear
- Moving air refrigeration maintains cabinet temperature of 15-17°C with up to 60 door openings per hour
- Integral condenser housed in Rotomold bin
- Automatic defrost cycle
- Counter integration options
  - counter top
  - recessed

#### **ACCESSORIES**

#### Factory Fitted Accessories

- Shelf lighting
- Condensate evaporator tray

#### Standard Accessories

- Small goods trays
- Angled base shelf
- Thermal divider panel -Prevents heat transfer between heated and refrigerated cabinets





ambient







#### **COMPLIANCE & APPROVALS**



**MEPS** 



**HACCP** 

3CATS-REVA

Australia T 1800 813 745 F 1800 813 746 E ausales@fpgworld.com 142 Proximity Drive Sunshine, P O Box 5062

T +86 21 5284 9755 F +86 21 3633 1611 E asales@fpgworld.com Rm 104, Building 8 No.31 KaiXuan Road (S) Shanghai 200232 P R China

New Zealand T +64 6 843 3249 F +64 6 843 2466 E nzsales@fpgworld.com 110 Austin Street P O Box 3029 Napier, 4112

New Zealand

T 0800 234 7922 F 0808 234 7921 E uksales@fpgworld.com 80 Haymarket

Furone T +49 89 7190 9062 F +49 89 7190 9063 E eusales@fpgworld.com 20a Kregerheim Straße Germany




### **INLINE 3000**

### **SPECIFICATIONS**

## Controlled Ambient Integral 3000 Series

SPECIFICATIONS				
	3CA08	3CA12	3CA15	3CA18
Height	769mm	769mm	769mm	769mm
Width	803mm	1203mm	1503mm	1803mm
Depth	663mm	663mm	663mm	663mm
Dry Weight	80Kg	100Kg	130Kg	160Kg
Temp Range	15-17°C	15-17°C	15-17°C	15-17°C
No. of Shelves	3 + Base	3 + Base	3 + Base	3 + Base
Display Area	0.9 m²	1.40m²	1.80m²	2.20m²
Voltage Power Typical Current Connection	230-240V 0.63Kw 2.75Amps 10 Amp 3 Pin Plug	230-240V 0.69Kw 2.98Amps 10 Amp 3 Pin Plug	230-240V 0.86Kw 3.72Amps 10 Amp 3 Pin Plug	230-240V 1.20Kw 5.22Amps 10 Amp 3 Pin Plug
Refrigerant	R134a	R134a	R134a	R134a
Climatic Class & IP	Class N, IP22	Class N, IP22	Class N, IP22	Class N, IP22
SHIPPING (Crated)				
Height	1330mm	1330mm	1330mm	1330mm
Width	875mm	1280mm	1580mm	1880mm
Depth	755mm	755mm	755mm	755mm
Weight	160Kg	205Kg	235Kg	247Kg
Volume	0.88m³	1.26m³	1.58m³	1.94m³
















3CATS-REVA





# Controlled Ambient Integral 3000 Series

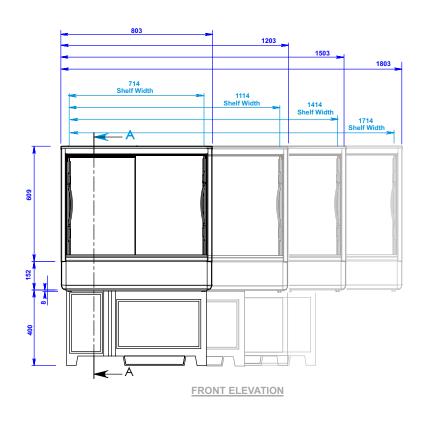















controlled



ambien



neated



bain m

3 3CATS-REVA

