

WASHTECH®

PROFESSIONAL WASH SYSTEMS

GM

Professional Undercounter Glasswasher and Light Duty Dishwasher – 450mm Rack

W 505mm x D 555mm x H 860mm

Smart Watermark certified, high efficiency, high performance multi-cycle machine is suitable for busy bars and coffee shops.

Standard Features

- Cool machine front and sound dampened door
- Low hot water consumption 2.2 litres per cycle
- Up to 1000 glasses per hour / 500 plates per hour
- Electronic controls with enhanced functionality
- Multi-cycle options – 1,2 and 3 minute cycles with manual cycle mode, Ecopower, Soft Start and Self Cleaning cycle
- Service diagnostics for error recognition
- Selectable cold rinse option
- Hot rinse retention
- Dual chemical injectors
- Drain pump
- Stainless steel upper and lower wash & rinse arms with removable cleaning caps
- Recirculates wash water at nominal 100 litres per minute
- 2.5kW wash & 3kW rinse heating
- 290mm door clearance
- Suits 450mm maximum rack width
- Magnetic door safety switch
- Stainless steel construction
- 316 grade stainless steel rinse tank
- Easy install
 - 2 x Water supply hoses
 - Dual chemical injector lines
 - Drain pump outlet hose
 - 15 amp plugset
- Includes adjustable 150mm high legs
- No commissioning required
- Watermark and Smart Watermark certified

Includes:

- 1 x 0428001 – 450mm cup rack
- 1 x 0428002 – 450mm dish rack
- 1 x C660503 – cutlery container



The unit shall be a Washtech glasswasher and dishwasher with Watermark and Smart Watermark certification. The glasswasher shall have electronic multi-cycle upper mounted controls with one, two and three minute complete operating cycles including operator selectable cold final rinse. The unit shall accept all racks up to 450mm square with 290mm door clearance for tall glasses. The unit shall have upper and lower stainless steel wash and rinse arms and hot water consumption of 2.2 litres per cycle. A detergent injector, rinse fluid injector and drain pump shall all be fitted and the unit shall be supplied in 100% recyclable shipping packaging. Electrical supply to be 15 amp single phase.




WASHTECH®

PROFESSIONAL WASH SYSTEMS

GM

Professional Undercounter Glasswasher and Light Duty Dishwasher – 450mm Rack

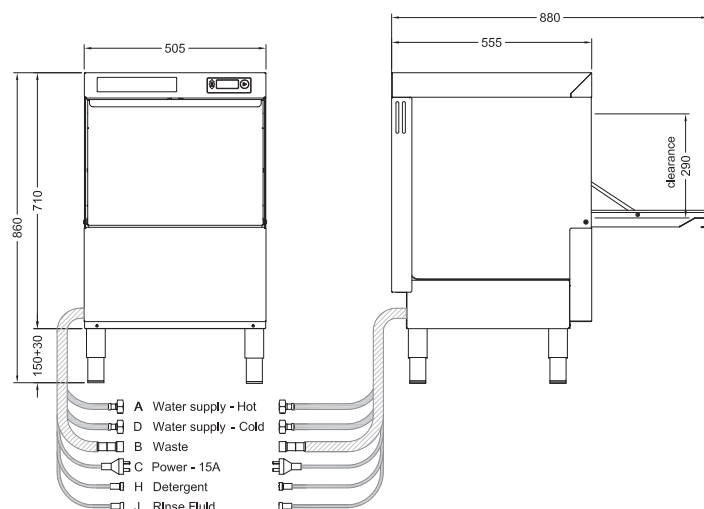

MOFFAT®

Australia
www.moffat.com.au

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

A Hot Water
temperature 65°C
connection 3/4"
pressure 200-350kPa
flow 20 litres per min
quality potable & soft

B Waste
connection 1.5 BSP
hose supplied

C Electrical
Single phase 240V 50Hz 15 amp
plugset supplied

D Cold Water
cold – otherwise as per hot

Dimensions
Width 505mm
Depth 555mm
Height 860mm
Weight 54kg

Packed Dimensions
Width 590mm
Depth 650mm
Height 870mm
Weight 68kg
Cubicmetres 0.3m³

Refer operator manual for complete
installation instructions

