
specifications

PG1300VC



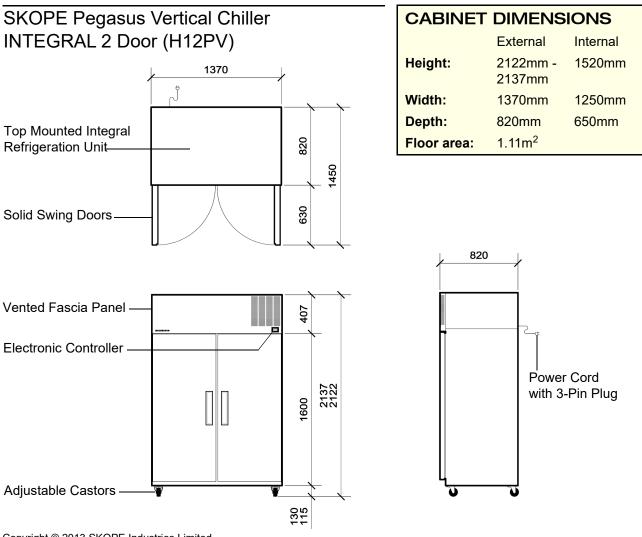

Copyright © 2013 SKOPE Industries Limited

CABINET SPECIFICATIONS	
Refrigeration system:	Electronic controlled, top mounted, removable integral refrigeration unit
Refrigeration unit model:	UT40AGD
Refrigerant:	R134a / 410g
Nominal capacity:	1000 Watts
Cabinet internal volume:	1298 litres
Insulation:	60mm thick, high density cyclo-isopentane polyurethane foam
Cabinet temperature range:	+1°C to +4°C up to 43°C ambient
Drainage:	No plumbing required
Electrical:	230-240 Volts a.c. 50 Hz, 4.8 Amps
Interior lighting:	1 interior light: 20 Watt T8 LED tube (Ø26 × 1200mm) - Door activated
Internal door opening size:	2 door openings: 1520mm high × 565mm wide
Doors:	Solid, stainless steel, self-closing doors (with key lock) - LH & RH hinged
Shelves:	5 levels of non-tip, adjustable tray slides and/or shelves 530mm × 650mm
Weight:	230 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0361 Rev. 1.0 Feb. 2018



SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673 Email: enquiry@skope.co.nz, Website: www.skope.com