





### **Grilling and frying.**

# Higher productivity, better results.

#### TriLax coating

The RATIONAL accessories coated with TriLax have excellent heat conductivity, they have been developed for grilling, frying, roasting and baking and can be used in temperatures up to 300 °C. The robust non-stick coating also supports browning.

#### • Roasting and baking tray

The universal tray for fish, meat, poultry pieces, roast potatoes, baked goods, vegetables and much more. Juicy with a nice crust.

#### **2** Grilling and roasting tray

For juicy grilled meat, fish or vegetables. With a grill side for a traditional grill pattern and a frying side with a rim around the edge for pan fried food. The ideal addition for your à la carte service.

#### **3** Grill and pizza tray

For fresh or convenience pizza, quiches and flatbreads. Grilling side for vegetables, fish and meat.

#### Multibaker

Optimal portioning and consistant product sizes for fried eggs, omlettes, hash browns and tortillas.

#### **6** Cross and stripe grill grate

With the classic grill stripes on the one side or the original American steakhouse pattern on the other. Extremely robust and durable. No preheating necessary.

#### CombiGrill griddle

For the preparation of large batches of grilled products. Preheating the grid is not necessary.

#### **O** Loading grid

Ideal addition to the CombiGrill griddle. For thin grilled products such as minute steaks or grilled vegetables. Place the food to be cooked on the loading grid, place it on the hot CombiGrill griddle and later remove.


#### 3 Roasting and baking pan

For classic pan dishes such as hash browns, tortillas, quiches, pancakes or small cakes such as tarte tatin. Griddled surface for fast heat input. With carrier tray for easy handling.

#### **9** Granite-enamelled container


With fully contoured corners so no portion of any bake is lost. Thanks to the excellent heat conductivity, it is ideal for roasting, braising, pan-frying and baking. Almost indestructible.

Article numbers and more versions on page 32. Article numbers and more versions on page 32.

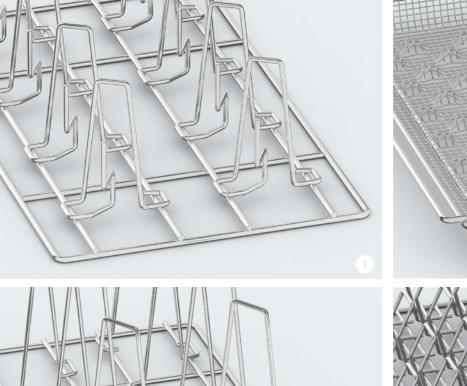





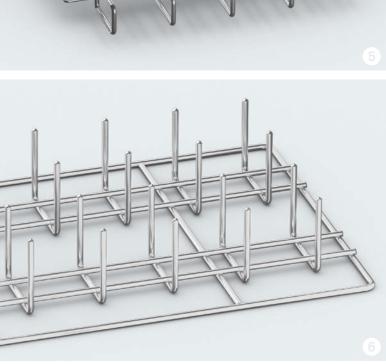



# Special applications.

# Special accessories for special requirements.

#### **10** O Chicken and duck superspike

Significantly reduced cooking time thanks to standing arrangement of poultry and the associated chimney effect. For succulent breast meat and uniformly browned skin.

#### CombiFry

Large quantities of pre-fried products such as fish nuggets, chips and wedges with no added fat. Healthy and delicious.

#### Ribs rack

Optimal utilisation of the unit thanks to the vertical arrangement of the spare ribs with up to 3.5 kg per grill.

#### **6** Grill and tandoori skewer

With round, square or rectangular cross-sections in different diameters for meat, fish, poultry or vegetables.

#### O Potato baker

Cook baked potatoes or corn on the cob without aluminium foil and up to 50 %\* faster.

#### • Lamb and suckling pig spit


Easily prepare entire lambs or suckling pigs of up to 30 kg.

 $<sup>^{\</sup>ast}$  Compared to conventional kitchen technology.









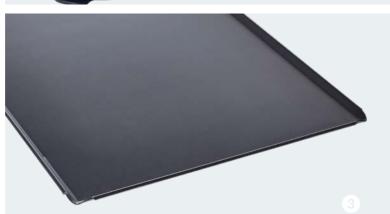



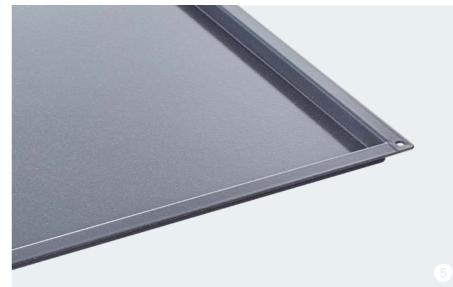





### Baking.

# This is quality craftsmanship.

#### Muffin and timbale mould

Made from highly flexible material and has optimal non-stick properties for muffins and desserts. 100 ml filling volume.

#### 2 Roasting and baking pan

Perfect for for small cakes like tartes tatin. The griddled base ensures fast heat input over the entire base. With special contoured carrier tray for easy handling.

#### Roasting and baking tray

The universal genius for baking: Bread rolls, croissants, danish pastries and much more with uniform browning, crispy crusts and fluffy interior.

#### Perforated baking tray

Ideal for bread, bread rolls, pretzels and for the production of all types of pre-baked products.

#### **6** Granite-enamelled container

The corners of the containers are fully contoured so that no portions of cakes are lost. Excellent heat conductivity for uniform browning and light and airy tray bakes.

#### Mobile oven rack in bakery standard

A mobile oven rack replaces one hinging rack. For quick loading and unloading, made from high-grade stainless steel for high quality requirements and perfectly tailored to RATIONAL units.

#### Bakery standard hinging rack

Thanks to the L-shaped racks, the hinging racks can easily be loaded with baking trays. The larger rail distance means the total capacity of the RATIONAL unit can also be used for higher baked goods. Made from high-grade stainless steel for top quality requirements.











### **GN** accessories.

# Better by default.

#### Perforated container

Versatile, robust and durable accessory for steaming vegetables or for your buffet. Maximum perforation means the food is evenly steamed, and retains its colours and nutrients.

#### **2** Containers

The material thickness of stainless steel RATIONAL containers is 33 % above the standard. This guarantees maximum stability even for large quantities, long service life and convenient handling without any sharp edges.

#### @ Grid

Ideal for cooking large roasts. Made from extremely stable and durable stainless steel.

### Extras.

# Even more possibilities.


#### • VarioSmoker

Spicy smoked aromas without a smoking oven, directly from the iCombi Pro. The VarioSmoker gives meat, fish and vegetables a natural smoky flavour, the intensity of which you can adjust and vary to your taste. Even low temperature cooking is not a problem.

#### 2 Externally attachable core probes

A special extra thin sous-vide core probe ensures that the core temperature of the product is achieved precisely without destroying the vacuum in the bag. The externally mounted core temperature probe can be used as a replacement option for the internal core temperature probe.

Article numbers and more versions on page 35. Article numbers and more versions on page 37.

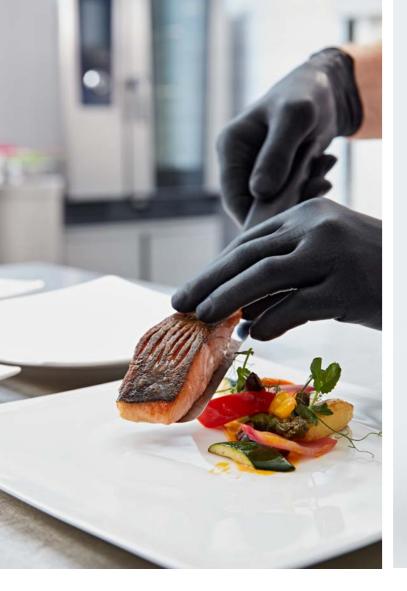











### Finishing.

# Consistent separation of production and output.

#### System for banqueting

20, 100 or several thousands of meals – with Finishing food is perfectly prepared without the stress, hectic rush or labour cost. Simply plate the appropriate number of plates cold and store them chilled in the mobile plate rack. The plates are then finished simultaneously using the Finishing process shortly before service. The Finishing system includes all accessories needed to start immediately (mobile plate rack, Thermocover, transport trolley).

#### Mobile plate racks

Made from high-grade stainless steel and perfectly tailored to the units. For fast loading and unloading for up to 120 plated plates in the iCombi Pro 20-2/1 (up to 31 cm diameter).

From special insulating materials to keep food hot for up to 20 minutes after Finishing. Easy to open and close with the simple magnetic seal. It is also easy to clean and store.

#### 4 Run-in rail

For quick, ergonomic loading and unloading of mobile oven racks or mobile plate racks. Required for tabletop A separate run-in rail for Combi-Duo is required. units Models 6-1/1, 6-2/1, 10-1/1 and 10-2/1.

#### Transport trolley

Simple loading and unloading of the mobile oven rack in tabletop units. Safely transport food thanks to the large, quiet and hygienic tandem castors. Tailored to the height of the stand. Height-adjustable version for worktops.

#### **1** Transport trolley for Combi-Duo

Safely load and unload both units in a single operation.







### Combi-Duo.

# Double the power.

#### **1** Combi-Duo

Two units, easily combined. When there is little available space but you still need to steam and grill at the same time and the workload is the same, Combi-Duo provides two units which you can choose to control from the top unit. For more convenience. For more flexibility.

#### 2 Integrated fat drain kit for Combi-Duo

Reliably collects dripping fat in the cooking cabinets and drains it into drip trays. Different versions available depending on the setup variation.

#### **3** Setup variations for Combi-Duo

The levelling kit and the stands are made from highgrade stainless steel for stable and correct setup.

#### The setup variations:

- > Levelling kit to compensate for uneven floors: Low version
- Mobile kit with rollers for easy cleaning and low rack height, requires a floor drain.
- > Setup with stand I or II for Combi-Duo with feet. No floor drain necessary.
- Mobile setup with Stand I or II for Combi-Duo with castors and parking brakes.

### Stands.

# Stable. Space-saving. Practical.

#### 4 Levelling kit and stands

For the stable and balanced setup of your RATIONAL unit, we provide stands made from high-grade stable stainless steel in various versions: open, closed on the side or fully closed stands with doors. Support rails help store cooking accessories to save space. Mobile variations with stable castors and parking brakes enable the flexible positioning of the unit in the kitchen. All stands are designed in accordance with the applicable hygiene regulations.













### Setup variations.

# Convenient and practical.

# • Installation kit for iCombi Pro XS and CombiMaster Plus XS

The appearance also counts – so you can also integrate the small cooking system with an installation kit in your front of shop area. Space for a hood is already provided so you can install an UltraVent or UltraVent Plus as needed. This is supplied with a trim kit included to prevent the accumulation of dirt in less accessible areas.

# **2** MobilityLine floor cooking system (Model 20-1/1, 20-2/1)

A special frame with four robust castors and parking brakes, on which the floor unit is mounted, allows effortless mobility.

#### MobilityLine tabletop unit (Model 6-1/1 − 10-2/1)

The tabletop unit is firmly screwed to Stand II MobilityLine. Side bars protect the unit and together with the large stable castors, they facilitate mobility.

# Exhaust air technology.

# For a good work climate.

#### All extraction and condensation hoods

- > Have a timeless modern design
- > Have an easy to clean front with a removable cover
- Adjust the extraction capacity with intelligent infinitely variable control of the fan depending on the situation, such as when opening the door. Installation is simple, and the system can be retrofitted at a later time, too.

#### UltraVent

With its condensation technology, the UltraVent absorbs steam and vapours. No connection to the outside or extension of an existing exhaust system is necessary with this air recirculation hood.

#### UltraVent Plus

In addition to the UltraVent's condensation technology, the UltraVent Plus is equipped with special filter technology. This not only condenses vapours, but also reduces unpleasant fumes, for example when grilling and frying. RATIONAL units can be installed even in critical locations such as at the front of the store.

#### Security Extraction Hood

Steam and vapours are automatically extracted from the cooking cabinet and when opening the cooking cabinet door (without condensation technology). An external connection is required.

















### Installation accessories.

# An answer to every challenge.

#### • Trolley levelling device

The trolley levelling device compensates for inclinations (up to 3 %) in the kitchen floor ensuring that the mobile oven rack can be rolled smoothly into the RATIONAL unit.

#### **2** Unit and mobile oven rack raiser

The ground clearance is increased by 70 mm. The mobile oven rack must be adjusted to the unit height accordingly.

#### Heat shield for right and left side panel

Retrofitting a heat shield allows you to place a radiant heat source (e.g. grill) near the right or left side panel.

#### **4** Flow guard (for gas units only)

Used to extract exhaust gases through a pipe (diameter of exhaust gas pipe 180 mm).

#### • Handle holder for mobile oven rack

Provides a fixed storage location for the mobile oven rack handle, so that it is always within easy reach (included with delivery of floor units).

#### **10** Unit connection kit

Consisting of a water inflow hose (2 m) and waste water pipes DN 50.

#### Condensation breaker

Accelerates the expulsion of steam and other vapours from the vent pipe. Steam and vapours can thus be diverted through a pipe into an extraction system.

#### Wall mounting

For space-saving wall mounting. The attachment and mounting material (not included) must be designed in consultation with an architect/structural engineer and the building owner.

Article numbers and more versions on page 39. Article numbers and more versions on page 39.





















### Care products.

# Hygienically clean.

# • Active Green cleaner tab (for iCombi Pro and iCombi Classic)

Keeps both the unit and the environment clean: The cleaner tab with its new formula is phosphate and phosphorous-free and reduces the quantity of cleaner by up to 50 %\*. Without compromising on cleaning power and hygiene. Can perform an ultra-fast interim clean of the iCombi Pro in approx. 12 minutes

# ② Cleaner tab (for all SelfCookingCenter and CombiMaster Plus units)

Highly-concentrated and economical cleaner tabs with an intensive combination of active ingredients for high-performance cleaning power.

**②** Care tab (for iCombi Pro, iCombi Classic and SelfCookingCenter units with Efficient CareControl)

Care substances actively protect against limescale in the steam generator and in the cooking cabinet before it even forms and extend the lifetime of the unit. Operational reliability without a water softener and time-consuming descaling.

• Rinse aid tab (for SelfCookingCenter units without Efficient CareControl and CombiMaster Plus)

Active protection and extended lifetime thanks to high-efficiency care substances. Your cooking cabinet will be left gleaming with hygienic cleanliness.

- **5** Defoamer tab (for all iCombi Pro, iCombi Classic, SelfCookingCenter and CombiMaster Plus units)
  Reduce foam when using heavily foaming water.
- Grill cleaner (for all CombiMaster and ClimaPlus Combi units)

Liquid cleaner for hygienic cleanliness and care.

# Special cleaner soft (for all CombiMaster and ClimaPlus Combi units)

For dirt resulting from cooking applications < 200 °C, non-corrosive.

Rinsing chemical, liquid (for ClimaPlus Combi with CleanJet)

#### Descaler (for SelfCookingCenter without Efficient CareControl, CombiMaster, ClimaPlus Combi)

For effective descaling of the steam generator with special care products.

#### **(1)** Handheld pressure sprayer

Made of sturdy plastic, robust and easy to handle. The built-in pump mechanism generates the overpressure so that you can spray the areas to be cleaned at the push of a button with liquid cleaner or rinsing chemical.


Article numbers and more versions on page 39. Article numbers and more versions on page 39.


<sup>\*</sup> Compared to the previous Model.









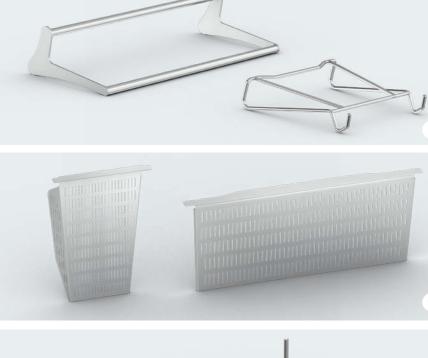





### The basis for everything.

# So you can work quicker, efficiently and more ergonomically.

#### O Scraper

To facilitate simple and ergonomic turning and removal of products. Stability and light weight thanks to sophisticated design.

#### 2 Scoops

For safe and easy emptying or portioning of large quantities of cooked food. Shock-resistant, scratch-resistant and temperature-resistant up to 250 °C. Perforated and unperforated.

#### Stir spatula

For stirring and mixing large quantities of food in the iVario Pro L and XL.

#### 4 Boiling and deep-frying basket

The baskets are hooked on the arm of the automatic lifting and lowering mechanism, then loaded. At the end of the cooking process, the basket is automatically lifted out of the cooking liquid and the product can be removed effortlessly. Also suitable for small products such as rice. Water can be used multiple times, as nothing needs to be tilted.

#### **9** Arm for automatic raising and lowering

The arm for the AutoLift lifting and lowering mechanism is placed on the lid. For up to three large boiling and deep-frying baskets. AutoLift lift the products out of the cooking liquid. Pinpoint cooking of boiled, deep-fried or poached products.

#### 6 Colander

Holds back loose cooked products when you drain off liquids. Place the colander on the front side of the pan and the liquid can flow off through the integrated pan valve or be collected by tilting the pan.

#### Rack

To prevent direct contact between the food to be cooked and the pan base, e.g. for low temperature cooking, the rack is placed on the pan base, and the food on top.

Article numbers and more versions on page 40. Article numbers and more versions on page 40.













# Special applications.

# The great art of boiling.

#### Portion basket kit

Kit with punched or unpunched 1/6 GN portion baskets including lids (for unpunched baskets only) and a frame. The frame can carry 1/3, 1/6 and 1/9 GN containers. Best used for boiling, deep-frying and keeping smaller quantities warm in restaurants, hotels and in service areas. Place the frame directly on the edge of the pan. The lid prevents the products from cooling and forming skin.

#### Spaetzle colander

Pan insert for optimal and ergonomic production of pasta, tailored precisely to the pan. Work height relieves pressure on the back.

# Transport.

# Go from A to B effortlessly. And back again.

#### • VarioMobil

To effortlessly and safely empty and transport cooked food in 1/1 or 2/1 GN containers. The handle is hinged so that the VarioMobil can be stored easily. Adjustable height in 4 positions.

#### 2 Basket cart

To easily and safely store, transport and drain standard GN containers or up to three boiling or deep-frying baskets.


#### Oil cart

To fill and empty the pan, and to store and filter oil. Melt cooking fat or heat cooled oil before filling the pan. Can be used to carry hot fat.

Article numbers and more versions on page 40. Article numbers and more versions on page 41.





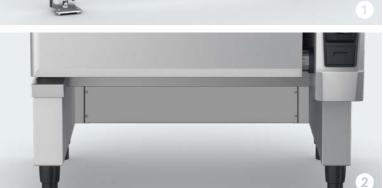









### Setup.

# Perfectly adjustable.

#### **O** Stand

iVario 2-XS and iVario Pro 2-S can be installed directly onto a stand. With integrated pull-out shelves to place containers and to easily empty the pan. With support rails to store GN containers and accessories. Can be set up flush to the wall, side walls and top closed, rear side open. Various setup variations with feet, stainless steel feet, castors or for plinth installation.

### Installation.

# More space. Greater security.

#### • Wall attachment kit

To make it easier to clean underneath the iVario Pro L and XL, it can be mounted on the wall. The position of the wall mounting can be chosen freely and can be adjusted to the physical size of the user.

#### Panelling for substructure

Veneers the rear area of the substructure and covers the cable and waste water installation for easier cleaning. Optional extra.

#### Storage space for substructure

To make efficient use of the space under the iVario Pro L and XL. Consists of up to nine pairs of support rails, side panels, closed on the top and rear. Optional extra.

#### 4 Unit connection kit for drain water

Consists of waste water pipes DN 40 or DN 50.

#### 6 Kit for floor fastening

Fix the unit to the floor for better work safety with the iVario Pro L and XL.

#### **6** Unit attachment kit

To fix the iVario 2-XS or iVario Pro 2-S to an existing worktop or the stand. For secure horizontal and vertical mounting.

28 Article numbers and more versions on page 41. Article numbers and more versions on page 41.











# Care products.

# Sparkling clean. Hygienic.

#### **1** Grill cleaner

which are difficult to remove with a simple detergent. Can be used undiluted. Then rinse well.

#### 2 Cleaning arm, incl. 4 pads

Helps clean difficult to reach external areas between the pan and the operating console in the iVario 2-XS and the iVario Pro 2-S. The kit comprises one cleaning arm and four cleaning pads in two degrees of hardness.

#### **10** Hard cleaning pads

For slight stains in the pan, such as from tomato sauce, Reorder for the cleaning arm for external cleaning. For stubborn dirt. Does not scratch the external panelling.

#### **4** Soft cleaning pads

Reorder for the cleaning arm for external cleaning. For easy to remove dirt.

#### **6** Cleaning sponge

For effective and fast cleaning of the pan. For all unit



# **Grilling and frying.**

2/3 GN (325 x 354 mm) 5 moulds





Perforated baking tray			Granite-enamelled container		
2/3 GN (325 x 354 mm)	No.	60.74.147	1/2 GN (325 x 265 mm) 20 mm deep	No.	6014.1202
1/1 GN (325 x 530 mm)	No.	6015.1103	1/2 GN (325 x 265 mm) 40 mm deep	No.	6014.1204
2/1 GN (650 x 530 mm)	No.	6015.2103	1/2 GN (325 x 265 mm) 60 mm deep	No.	6014.1206
Bakery standard (400 × 600 mm)	No.	6015.1000	2/3 GN (325 x 354 mm) 20 mm deep	No.	6014.2302
Roasting and baking trays (unperforated)			2/3 GN (325 x 354 mm) 40 mm deep	No.	6014.2304
2/3 GN (325 x 354 mm)	No.	60.73.671	2/3 GN (325 x 354 mm) 60 mm deep	No.	6014.2306
1/1 GN (325 x 530 mm)	No.	6013.1103	2/3 GN (325 x 354 mm) 100 mm deep	No.	6014.2310
		6013.1103	1/1 GN (325 x 530 mm) 20 mm deep	No.	6014.1102
2/1 GN (650 x 530 mm)	No.		1/1 GN (325 x 530 mm) 40 mm deep	No.	6014.1104
Bakery standard (400 × 600 mm)	No.	6013.1003	1/1 GN (325 x 530 mm) 60 mm deep	No.	6014.1106
Grilling and roasting tray			1/1 GN (325 x 530 mm) 100 mm deep	No.	6014.1110
1/1 GN (325 × 530 mm)	No.	60.71.617	2/1 GN (650 x 530 mm) 20 mm deep	No.	6014.2102
Grill and pizza tray			2/1 GN (650 x 530 mm) 40 mm deep	No.	6014.2104
2/3 GN (325 × 354 mm)	No.	60.73.798	2/1 GN (650 x 530 mm) 60 mm deep	No.	6014.2106
1/1 GN (325 × 530 mm)	No.	60.70.943	Bakery standard (400 x 600 mm) 20 mm deep	No.	6014.1002
Bakery standard (400 × 600 mm)	No.	60.71.237	Bakery standard (400 x 600 mm) 40 mm deep	No.	6014.1004
,			Bakery standard (400 x 600 mm) 60 mm deep	No.	6014.1006
Multibaker					
1/3 GN (325 x 265 mm) 2 moulds	No.	60.73.764			

No. 60.73.646

# Finishing.

Thermocover

Cross and stripe grill grate  1/2 GN (325 x 265 mm)  2/3 GN (325 x 354 mm)  1/1 GN (325 x 530 mm)  CombiGrill griddle	No. No. No.	60.71.157 60.73.802 60.73.801 60.73.314
1/2 GN (325 x 265 mm) 2/3 GN (325 x 354 mm) 1/1 GN (325 x 530 mm)  CombiGrill griddle	No.	60.73.801
2/3 GN (325 x 354 mm)  1/1 GN (325 x 530 mm)  CombiGrill griddle	No.	60.73.801
1/1 GN (325 x 530 mm)  CombiGrill griddle		
CombiGrill griddle	No.	60.73.314
<u> </u>		
1/1 GN (325 x 530 mm)		
,	No.	6035.1017
Loading grid		
for CombiGrill griddle 325 x 618 mm (for $1/1$ GN)	No.	60.73.848
Roasting and baking pan		
Small set (4 pcs including carrier tray)	No.	60.73.286
Large set (2 pcs including carrier tray)	No.	60.73.287
Roasting and baking pan, small (ø 16 cm)	No.	60.73.271
Roasting and baking pan, large (ø 25 cm)	No.	60.73.272
Carrier tray for roasting and baking pan, small	No.	60.73.212
Carrier tray for roasting and baking pan large	No.	60.73.216

Model 6-1/1	No.	6004.1007
Model 10-1/1	No.	6004.1009
Model 6-2/1	No.	6004.1016
Model 10-2/1	No.	6004.1014
Model 20-1/1	No.	6004.1011
Model 20-2/1	No.	6004.1012
System for banqueting		
Model 6-1/1, 20 plates	No.	60.61.741
Model 10-1/1, 32 plates	No.	60.11.628
Model 10-1/1, 26 plates	No.	60.11.629
Model 6-2/1, 34 plates	No.	60.62.196
Model 10-2/1, 42 plates	No.	60.12.154
Model 10-2/1, 52 plates	No.	60.12.155
Model 20-1/1, 60 plates	No.	60.21.332
Model 20-1/1, 50 plates	No.	60.21.333
Model 20-2/1, 120 plates	No.	60.22.493
Model 20-2/1, 100 plates	No.	60.22.492
Model 20-2/1, 84 plates	No.	60.22.491

Mobile plate rack			Transport trolley Combi-Duo for mobile ove	n rack	
Model 6-1/1, 20 plates	No.	60.61.702	For Combi-Duo 6-1/1 and 10-1/1,	No.	60.75.388
Model 6-1/1, 15 plates	No.	60.61.701	Dimensions W 568   D 844   H 1218 – 1418 mm		
Model 10-1/1, 32 plates	No.	60.11.581	For Combi-Duo 6-2/1 and 10-2/1,	No.	60.75.387
Model 10-1/1, 26 plates	No.	60.11.602	Dimensions W 785   D 979   H 1218 – 1418 mm		
Model 6-2/1, 34 plates	No.	60.62.017			
Model 10-2/1, 52 plates	No.	60.12.022	Transport trolley Standard for mobile oven ra	ack	
Model 10-2/1, 42 plates	No.	60.12.062	Standard – 6-1/1, 10-1/1, dimensions W 548   D 911   H 990 mm	No.	60.74.000
Model 20-1/1, 60 plates	No.	60.21.293	Height-adjustable – 6-1/1, 10-1/1,	No.	60.75.606
Model 20-1/1, 50 plates	No.	60.21.294	dimensions W 548   D 913   H 800 -		00.70.000
Model 20-2/1, 120 plates	No.	60.22.400	1330 mm		
Model 20-2/1, 100 plates	No.	60.22.399	Standard – 6-2/1, 10-2/1, dimensions W 735   D 996   H 990 mm	No.	60.73.999
Model 20-2/1, 84 plates	No.	60.22.398	Height-adjustable – 6-2/1, 10-2/1,	No.	60.75.605
Combi-Duo run-in rail for mobile oven rack			dimensions W 735   D 990   H 800 – 1330 mm		
Model Combi-Duo 6-1/1 and 10-1/1	No.	60.75.761	Transport trolley for containers		
Model Combi-Duo 6-2/1 and 10-2/1	No.	60.75.760	Transport trolley for integrated fat drain	No.	60.73.309
Run-in rail for mobile oven rack			system (Combi-Duo and floor units)	110.	00.7 5.0 0 5
Standard Model 6-1/1, 10-1/1	No.	60.75.115			
Standard Model 6-2/1, 10-2/1	No.	60.74.650			

# Sample calculation with Finishing.

Capacity Mobile plate rack	Size of event (number of persons)	Mobile plate racks, Thermocovers	Run-in rail	Transport trolley	Max. Plate height in mm	Max. Food height in mm
	15/20	1	1	1	32/25	53
15/20 plates* with iCombi Pro 6-1/1	30/40	2	1	2	32/25	53
	45/60	3	1	3	32/25	53
/	52/64	2	1	2	32/25	53
26/32 plates* with iCombi Pro 10-1/1	78/96	3	1	3	32/25	53
,	104/128	4	1	4	32/25	53
	24/34	1	1	1	32	61
34 plates* with iCombi Pro 6-2/1	48/68	2	1	2	32	61
	72/102	3	1	3	32	61
42/52 plates* with iCombi Pro 10-2/1	84/104	2	1	2	40/32	82/63
	126/156	3	1	3	40/32	82/63
	168/208	4	1	4	40/32	82/63
/	100/120	2	_	_	32/25	67
50/60 plates* with iCombi Pro 20-1/1	150/180	3	-	-	32/25	67
, ,	200/240	4	_	-	32/25	67
0.4 (400 (400 ) )	168/200/240	2	_	-	40/32/25	79/65/52
84/100/120 plates* with iCombi Pro 20-2/1	252/300/360	3	-	-	40/32/25	79/65/52
	336/400/480	4	_	-	40/32/25	79/65/52

\*Plate size up to 31 cm diameter

### **Baking**



# Baking.

### Special applications.



uffin	and	tim	halo	mal	الطد
umn	ana	пm	naie	moı	แตร

300 x 400 mm (for 1/1 GN (325 x 530 mm)	No.	6017.1002
$400 \times 600$ mm (for $2/1$ GN (650 x 530 mm) and bakery standard	No.	6017.1001

#### Mobile oven rack Model 6-1/1

Standard, 6 racks (rail distance 64 mm)	No.	60.61.420
Bakery standard (400 x 600mm), 5 racks (rail distance 77 mm)*	No.	60.61.690

#### Mobile oven rack Model 10-1/1

Standard, 10 racks (rail distance 64 mm)	No.	60.11.600
8 racks (rail distance 80 mm)	No.	60.11.601
Bakery standard (400 x 600mm), 8 racks (rail distance 81 mm)*	No.	60.11.599

#### Mobile oven rack Model 6-2/1

Standard, 6 racks (rail distance 64 mm)	No.	60.62.150
Mobile oven rack Model 10-2/1		
Standard, 10 racks (rail distance 63mm)	No.	60.12.150

	Mobile oven rack Model 20-1/1		
	Standard, 20 racks (rail distance 65 mm)	No.	60.21.331
	15 racks (rail distance 84 mm)	No.	60.21.287
	16 racks (rail distance 80 mm)	No.	60.21.288
	17 racks (rail distance 74 mm)	No.	60.21.289
	Bakery standard (400 x 600mm), 16 racks (rail distance 81 mm)*	No.	60.21.292
	20 racks, max. rack height 1.60 m (rail distance 62 mm)	No.	60.21.245

#### Mobile oven rack Model 20-2/1

Standard, 20 racks (rail distance 65 mm)	No.	60.22.490
15 racks (rail distance 84 mm)	No.	60.22.394
16 racks (rail distance 80 mm)	No.	60.22.395
17 racks (rail distance 74 mm)	No.	60.22.396
20 racks, max. rack height 1.60 m (rail distance 62 mm)	No.	60.22.368

#### Hinging rack Model XS 6-2/3

Standard	No.	60.73.724
----------	-----	-----------

#### Hinging rack Model 6-1/1

Standard, 6 racks (rail distance 68 mm)	No.	60.61.373
5 racks (rail distance 85 mm)	No.	60.61.615
Chicken grill, 2 racks	No.	60.61.645
Meat trays, 6 racks (rail distance 72 mm)	No.	60.61.649
Bakery standard (400 x 600mm), 5 racks (rail distance 86 mm)*	No.	60.61.576
Combi rack, bakery standard combined with 1/1 GN, 4 racks (rail distance 95 mm)*	No.	60.61.642

#### Hinging rack Model 10-1/1

Standard, 10 racks (rail distance 68 mm)	No.	60.11.447
8 racks (rail distance 85 mm)	No.	60.11.547
Chicken grill, 3 racks	No.	60.11.566
Meat trays, 10 racks (rail distance 72 mm)	No.	60.11.570
Bakery standard (400 x 600mm), 8 racks (rail distance 90 mm)*	No.	60.11.541
Combi rack, bakery standard combined with 1/1 GN, 7 racks (rail distance 95 mm)*	No.	60.11.563

#### Hinging rack Model 6-2/1

Standard, 6 racks (rail distance 68 mm)	No.	60.62.123
5 racks (rail distance 85 mm)	No.	60.62.171
7 racks without L rails (rail distance 65 mm)	No.	60.62.168
Hinging rack Model 10-2/1		

Standard, 10 racks (rail distance 68 mm)	No.	60.12.133	
		001121100	

#### Chicken and duck superspike

Capacity 4 pcs, max. weight 1,300 g, 1/2 GN (325 x 265 mm)	No.	6035.1015
Capacity 6 pcs, max. weight 1,800 g, 1/1 GN (325 x 530 mm)	No.	6035.1016
Capacity 8 pcs, max. weight 1,300 g, 1/1 GN (325 x 530 mm)	No.	6035.1006
Capacity 10 pcs, max. weight 950 g, 1/1 GN (325 x 530 mm)	No.	6035.1010
Capacity: 8 pcs, max. weight 2,200 g, 1/1 GN (325 x 530 mm)	No.	6035.1009

#### CombiFry

1/2 GN (325 x 265 mm)	No.	6019.1250
2/3 GN (325 x 354 mm)	No.	60.73.619
1/1 GN (325 x 530 mm)	No.	6019.1150

#### Rib rack

1/1 GN (325 x 530 mm)	No	6035.1018
1/ 1 GIN (323 X 330 [1][]])	INO.	0033.1018

#### Grill and tandoori skewer

Grill and tandoori skewer frame 2/3 GN	No.	60.74.963
Grill and tandoori skewer frame 1/1 GN	No.	60.72.224
Set 2/3 GN (1 x skewer frame and five different skewers)	No.	60.75.782
Set 1/1 GN (1 x skewer frame and five different skewers)	No.	60.72.414
5x skewers O $5$ mm, $265$ mm long for $2/3$ GN	No.	60.75.783
$5x$ skewers $\square$ $5$ mm, $265$ mm long for $2/3$ GN	No.	60.75.784
$5x$ fish skewers $4 \times 10$ mm, $265$ mm long for $2/3$ GN	No.	60.75.785
3x skewers O 5 mm, 530 mm long for $1/1$ GN	No.	60.72.416
3xskewersO8mm , $530mmlongfor1/1GN$	No.	60.72.417
$3x$ skewers $\square$ 5 mm, 530 mm long for $1/1$ GN	No.	60.72.418
$3x$ skewers $\square$ $8$ mm, $530$ mm long for $1/1$ GN	No.	60.72.419
$3x$ fish skewers $4 \times 10$ mm, $530$ mm long for $1/1$ GN	No.	60.72.420

# **GN** accessories.

#### Rust-free stainless steel perforated container

1/1 GN (325 x 530 mm) 55 mm deep

Rust-free stainless steel container		
2/3 GN (325 x 354 mm) 20 mm deep	No.	6013.2302
2/3 GN (325 x 354 mm) 65 mm deep	No.	6013.2306
1/1 GN (325 x 530 mm) 20 mm deep	No.	6013.1102
1/1 GN (325 x 530 mm) 40 mm deep	No.	6013.1104
1/1 GN (325 x 530 mm) 65 mm deep	No.	6013.1106

#### Stainless steel grid

2/3 GN (325 x 354 mm)	No.	6010.2301
1/1 GN (325 x 530 mm)	No.	6010.1101
2/1 GN (650 x 530 mm)	No.	6010.2101
Bakery standard (400 x 600 mm)	No.	6010.0103

#### Dripping tray with drain lock

1/	1 GN (325 × 530 mm)	No.	8710.1135
2/	1 GN (650 × 530 mm)	No.	60.70.776

#### Potato baker

No. 6015.1165

1	/1 CN /22	T F30	NI.	CO2F 1010
L,	/ I GN (32	25 x 530 mm)	INO.	6035.1019

#### Lamb and suckling pig spit (1 lamb or 1 suckling pig)

	Models 10-1/1, 10-2/1, 20-1/1, 20-2/1 to 12 kg (1/1 GN)	No.	60.70.819
	Model 20-1/1 to 30 kg (1 skewer with carrier)	No.	6035.1003
	Model 20-2/1 to 30 kg (1 skewer with carrier, second skewer for lamb or suckling pig optional)	No.	6035.1002
	Optional skewer	No.	8710.1065

#### Pizza pan

Pizza up to Ø 280 mm	No.	60.71.158

34 35

<sup>\*</sup> Please note that different air baffles are used in the cooking cabinet with GN versions and 400 × 600 mm bakery standard versions. The air baffle can be obtained from your Service Partner as a spare part, if it is not ordered as an option when the unit is purchased.



# Combi-Duo kit for iCombi Pro XS 6-2/3 and CombiMaster Plus XS 6-2/3

Model XS 6-2/3 on Model XS 6-2/3 right-sided hinge	No.	60.73.768
Model XS 6-2/3 on Model XS 6-2/3 left-sided hinge	No.	60.74.276

# Combi-Duo kit for iCombi Pro XS 6-2/3, 6-1/1, 10-1/1, iCombi Classic 6-1/1, 10-1/1 and Combi Master Plus XS 6-2/3

CombiMaster Plus XS 6-2/3		
Model 6-1/1 E/G on Model 6-1/1 E Model 6-1/1 E/G on Model 10-1/1 E	No.	60.73.991
Model 6-1/1 E/G on Model 6-1/1 G right-sided hinge Model XS 6-2/3 on Model 6-1/1 G right-sided hinge	No.	60.75.751
Model 6-1/1 E/G on Model 6-1/1 G left-sided hinge Model XS 6-2/3 on Model 6-1/1 G left-sided hinge	No.	60.75.753
Model XS 6-2/3 on Model 6-1/1 E right-sided hinge Model XS 6-2/3 on Model 10-1/1 E right-sided hinge	No.	60.75.755
Model XS 6-2/3 on Model 6-1/1 E left-sided hinge Model XS 6-2/3 on 10-1/1 E left-sided hinge	No.	60.75.757

# Combi-Duo kit for iCombi Pro XS 6-2/3, 6-1/1, 6-2/1, 10-2/1, iCombi Classic 6-1/1, 6-2/1, 10-2/1 and CombiMaster Plus XS 6-2/3

and CombiMaster Plus XS 6-2/3		
Model 6-2/1 E/G on Model 6-2/ Model 6-2/1 E/G on Model 10-2,		60.74.725
Model 6-2/1 E/G on Model 6-2/right-sided hinge Model 6-1/1 E/G on Model 6-2/right-sided hinge Model XS 6-2/3 on Model 6-2/1 right-sided hinge	1 G	60.75.752
Model 6-2/1 E/G on Model 6-2/left-sided hinge Model 6-1/1 E/G on Model 6-2/left-sided hinge Model XS 6-2/3 on Model 6-2/1 left-sided hinge	1 G	60.75.754
Model 6-1/1 E/G on Model 6-2/right-sided hinge Model XS 6-2/3 on Model 6-2/1 right-sided hinge Model XS 6-2/3 on Model 10-2/1 right-sided hinge	Ē	. 60.75.756
Model 6-1/1 E/G on Model 6-2/left-sided hinge Model XS 6-2/3 on Model 6-2/1 left-sided hinge Model XS 6-2/3 on Model 10-2/1 left-sided hinge	Ē	60.75.758

#### Setup variations for Combi-Duo

Levelling kit Models 6-1/1, 10-1/1, dimensions W 850   D 614   H 35 mm	No.	60.74.795
Levelling kit Models 6-2/1, 10-2/1, Dimensions W 1072   D 814   H 35 mm	No.	60.74.597
Kit with height-adjustable castors, Models 6-1/1, 10-1/1	No.	60.31.545
Kit with height-adjustable castors, Models 6-2/1, 10-2/1	No.	60.31.574
Stand I for Combi-Duo XS 6-2/3, standard, dimensions W 634   D 558   H 555 mm	No.	60.31.020
Stand II for Combi-Duo XS 6-2/3, standard, dimensions W 639   D 563   H 556 mm	No.	60.31.046
Stand I for Combi-Duo 6-1/1 on 6-1/1 and on 10-1/1 E, standard, dimensions W 860   D 685   H 200 mm	No.	60.31.200
Stand I for Combi-Duo 6-1/1 on 6-1/1, standard, dimensions W 860   D 703   H 445 mm	No.	60.31.206
Stand I for Combi-Duo 6-2/1 on 6-2/1 and on 10-2/1 E, standard, dimensions W 1082   D 885   H 200 mm	No.	60.31.203
Stand II for Combi-Duo 6-2/1 on 6-2/1, standard, dimensions W 1082   D 903   H 445 mm	No.	60.31.208
Stand I for Combi-Duo XS 6-2/3, with castors, dimensions W 683   D 656   H 567 mm	No.	60.31.170
Stand I for Combi-Duo 6-1/1 on 6-1/1 and on 10-1/1 E, with castors, dimensions W 883   D 763   H 200 mm	No.	60.31.201
Stand II for Combi-Duo 6-1/1 on 6-1/1, with castors, dimensions W 883   D 769   H 445 mm	No.	60.31.207
Stand I for Combi-Duo 6-2/1 on 6-2/1 and on 10-2/1 E, with castors, dimensions W 1105   D 969   H 200 mm	No.	60.31.204

### Combi-Duo.

### Setup variations.



#### Hinging rack Combi-Duo Model 6-1/1

Combi-Duo version, 5+1 racks (top rack is	No.	60.61.678
removable for a max. rack height of 1.60 m,		
with floor setup 6-1/1 E on 10-1/1 E)		

#### Hinging rack Combi-Duo Model 6-2/1

Combi-Duo version, 5+1 racks (top rack is	No.	60.62.188
removable for a max. rack height of 1.60 m,		
with floor setup 6-2/1 E on 10-2/1 E)		

#### Integrated fat drain kit for Combi-Duo

medgracea rac aram kitror comor bao		
to be set up on the levelling kit Combi-Duo 6-1/1 and 10-1/1	No.	60.75.873
to be set up on Stand I Combi-Duo 6-1/1 and 10-1/1	No.	60.75.406
to be set up on Stand II Combi-Duo 6-1/1 and 10-1/1	No.	60.75.874
to be set up on the levelling kit Combi-Duo 6-2/1 and 10-2/1	No.	60.75.876
to be set up on Stand I Combi-Duo 6-2/1 and 10-2/1	No.	60.75.411
to be set up on Stand II Combi-Duo 6-2/1 and 10-2/1	No.	60.75.875

#### Installation kit

UltraVent XS including installation kit	No.	60.74.063
UltraVent Plus XS including installation kit	No.	60.74.405

#### MobilityLine floor unit

Mobile base frame 20-1/1	No.	60.21.334
Mobile base frame 20-2/1	No.	60.22.496

# Exhaust air technology.

#### Extraction hood, UltraVent and UltraVent Plus

UltraVent XS Combi-Duo	No.	60.73.943
UltraVent Plus XS Combi-Duo	No.	60.74.404
UltraVent Combi-Duo Models 6-1/1, 10-1/1	No.	60.76.169
UltraVent Plus Combi-Duo Models 6-1/1, 10-1/1	No.	60.76.173
Extraction hood Combi-Duo Models 6-1/1, 10-1/1	No.	60.76.221
UltraVent Combi-Duo Models 6-2/1, 10-2/1	No.	60.76.170
UltraVent Plus Combi-Duo Models 6-2/1, 10-2/1	No.	60.76.174
Extraction hood Combi-Duo Models 6-2/1, 10-2/1	No.	60.76.222
UltraVent, Model XS 6-2/3	No.	60.73.865
UltraVent Plus, Model XS 6-2/3	No.	60.74.394
UltraVent, Models 6-1/1, 10-1/1	No.	60.75.134
UltraVent Plus, Models 6-1/1, 10-1/1	No.	60.75.142
Extraction hood, Models 6-1/1, 10-1/1	No.	60.76.217
UltraVent, Models 6-2/1, 10-2/1	No.	60.75.135
UltraVent Plus, Models 6-2/1, 10-2/1	No.	60.75.143
Extraction hood, Models 6-2/1, 10-2/1	No.	60.76.218
UltraVent, Model 20-1/1	No.	60.75.136
UltraVent, Model 20-2/1	No.	60.75.137

### Extras.

#### VarioSmoker

VarioSmoker	No.	60.73.008
USB core probe		
Sous-vide core probe for tabletop and floor units	No.	60.76.316
1 external core probe for tabletop units	No.	60.76.317
1 external core probe for floor units	No.	60.76.318
Positioning aid for core probe		
Models 6-1/1, 10-1/1, 6-2/1, 10-2/1, 20-1/1 and 20-2/1	No.	60.71.022

### Stands.



#### Stand Model XS 6-2/3

Stand XS, standard, W 629   D 438   H 148 mm	No.	60.31.029
Stand I, standard, dimensions W 634   D 558   H 931 mm	No.	60.31.018
Stand I, with castors, dimensions W 683   D 656   H 943 mm	No.	60.31.169
Stand II, standard, dimensions W 639   D 563   H 932 mm	No.	60.31.044

Levelling kit and stands Model 6-1/1 and 10	)-1/1	
Levelling kit Models 6-1/1, 10-1/1, dimensions W 850   D 614   H 35 mm	No.	60.74.795
Mobile levelling kit with rollers, Models 6-1/1, 10-1/1	No.	60.31.545
Stand I, standard, Dimensions W 860   D 685   H 699 mm	No.	60.31.089
Stand I, with castors, Dimensions W 883   D 763   H 699 mm	No.	60.31.095
Stand II, standard, Dimensions W 860   D 703   H 699 mm	No.	60.31.086
Stand II, with castors, Dimensions W 883   D 769   H 699 mm	No.	60.31.103
Stand II, bakery standard, standard, dimensions W 860   D 703   H 699 mm	No.	60.31.209
Stand II, bakery standard, with castors, dimensions W 883   D 769   H 699 mm	No.	60.31.210
Stand II, bakery standard, UltraVent version, standard, dimensions W 860   D 703   H 945 mm	No.	60.31.212
Stand II, bakery standard, UltraVent version, with castors, dimensions W 883   D 769   H 945 mm	No.	60.31.213
Stand II, MobilityLine, dimensions W 1199   D 892   H 792 mm	No.	60.31.164
Stand III, standard, dimensions W 860   D 703   H 699 mm	No.	60.31.091
Stand III, with castors, dimensions W 883   D 769   H 699 mm	No.	60.31.105
Stand III, UltraVent version, standard, dimensions W 860   D 703   H 945 mm	No.	60.31.214

#### Levelling kit and stand Model 6-1/1 and 10-1/1

Stand III, UltraVent version, with castors, dimensions W 904   D 769   H 945 mm	No.	60.31.215	
Stand IV, standard, dimensions W 860   D 703   H 699 mm	No.	60.31.093	
Stand IV, with castors, dimensions W 883   D 769   H 699 mm	No.	60.31.107	
Levelling kit and stand Model 6-2/1 and 10-2/1			

Levelling kit and stand Model 6-2/1 and 10-	-2/1	
Levelling kit Models 6-2/1, 10-2/1, dimensions W 1072   D 814   H 35 mm	No.	60.74.597
Mobile levelling kit with rollers, Models 6-2/1, 10-2/1	No.	60.31.574
Stand I, standard, dimensions W 1082   D 885   H 699 mm	No.	60.31.090
Stand I, with castors, Dimensions W 1105   D 963   H 699 mm	No.	60.31.102
Stand II, standard, Dimensions W 1082   D 903   H 699 mm	No.	60.31.087
Stand II, with castors, Dimensions W 1105   D 969   H 699 mm	No.	60.31.104
Stand II, MobilityLine, dimensions W 1421   D 1092   H 792 mm	No.	60.31.165
Stand III, standard, dimensions W 1082   D 903   H 699 mm	No.	60.31.092
Stand III, with castors, dimensions W 1105   D 969   H 699 mm	No.	60.31.106
Stand III, UltraVent version, standard, dimensions W 1082   D 903   H 945 mm	No.	60.31.216
Stand III, UltraVent version, with castors, dimensions W 1105   D 974   H 945 mm	No.	60.31.217
Stand IV, standard, dimensions W 1082   D 903   H 699 mm	No.	60.31.094
Stand IV, with castors, Dimensions W 1105   D 969   H 699 mm	No.	60.31.108

### Installation accessories.



No. 56.00.210

T II	L 112	4	C 1.21 .		
irollev	ieveiiina	device	ror mobile	oven rack	

Model 20-1/1	No.	60.21.262			
Model 20-2/1	No.	60.22.380			
Unit raiser					
Models 20-1/1, 20-2/1	No.	60.70.407			
Raiser for mobile oven rack					
Model 20-1/1	No.	60.21.297			
Model 20-2/1	No.	60.22.386			

#### Heat shield for side panel

Left heat shield, Model XS 6-2/3	No.	60.74.182
Left heat shield, Model 6-1/1	No.	60.75.110
Right heat shield, Model 6-1/1	No.	60.75.113
Left heat shield, Model 10-1/1	No.	60.75.773
Right heat shield, Model 10-1/1	No.	60.75.77
Left heat shield, Model 6-2/1	No.	60.75.769
Right heat shield, Model 6-2/1	No.	60.75.768
Left heat shield, Model 10-2/1	No.	60.75.776
Right heat shield, Model 10-2/1	No.	60.75.774
Left heat shield, Model 20-1/1	No.	60.75.829
Left heat shield, Model 20-2/1	No.	60.75.826

#### Flow guard (for gas units only)

Model 6-1/1	No.	70.01.339
Model 10-1/1	No.	70.01.340
Model 6-2/1	No.	70.01.431
Model 10-2/1	No.	70.01.582
Model 20-1/1	No.	70.01.583
Model 20-2/1	No.	70.01.492

#### Flue gas collector for gas units

Model 6-1/1	No.	70.01.360
Model 10-1/1	No.	70.01.376
Model 6-2/1	No.	70.01.432
Model 10-2/1	No.	70.01.586
Model 20-1/1	No.	70.01.587
Model 20-2/1	No.	70.01.493

#### Handle holder for mobile oven rack

Models 20-1/1, 20-2/1	No.	60.75.895

#### Unit connection kit

Models XS 6-2/3, 6-1/1, 10-1/1, 6-2/1,	No.	60.70.464
10-2/1, 20-1/1, 20-2/1		

#### Condensation breaker

Model XS 6-2/3 (H 438 mm)	No.	60.74.037
Models 6-1/1, 10-1/1, 6-2/1 and 10-2/1 (H 458 mm)	No.	60.72.592
Models 20-1/1 and 20-2/1 (H 480 mm)	No.	60.75.326
Wall mounting		
Model XS 6-2/3	No.	60.30.968
Model 6-1/1	No.	60.31.168

### Care products.

Cleaner tabs, 100 pcs

with Efficient CareControl)

#### Active Green cleaner tab (for iCombi Pro and iCombi Classic)

Active Green cleaner tabs, 150 pcs	No.	56.01.535
Cleaner tab (for all SelfCookingCenter and C	ombiMa	aster Plus)

### Care tab (for iCombi Pro, iCombi Classic and SelfCookingCenter

Care tabs, 150 pcs	No.	56.00.562

#### Rinse aid tab (for SelfCookingCenter units without Efficient CareControl and CombiMaster Plus)

Rinse aid tabs, 50 pcs	No	56.00.211
Rinse aid tabs, 50 pcs	INO.	56.00.211

#### Defoamer tab (for all iCombi Pro, iCombi Classic, SelfCookingCenter and CombiMaster Plus)

Defoamer tabs.	. 120 pcs	No.	56.00.598

#### Liquid cleaner (for all CombiMaster and ClimaPlus Combi units)

Special cleaner soft (for all CombiMaster and ClimaPlus Combi units)	No.	9006.0136
Grill cleaner (for all CombiMaster and ClimaPlus Combi units)	No.	9006.0153
Liquid rinsing chemical (for ClimaPlus Combi with CleanJet)	No.	9006.0137

#### Descaler (for SelfCookingCenter without CareControl, CombiMaster, ClimaPlus Combi)

Descaler, 10 litres	No.	6006.0110
Foot pump for descaling the steam generator	No.	6004.0203

#### Handheld pressure sprayer

Handheld pressure sprayer for manual	No.	6004.0100
cleaning		

38 39

# The basis for everything.

# Special application.



60.74.958

60.75.629

#### Portion baskets kit Model 2-XS

Scraper			Portion baskets kit Model 2-XS		
Model 2-XS, 2-S, L, XL	No.	60.71.643	Kit 4 punched 1/6 GN portion baskets + portion basket frame	No.	60.75.300
Scoop			Kit 4 unpunched 1/6 GN portion baskets	No.	60.75.978
Unpunched Model 2-S, L, XL	No.	60.73.348	with lid + portion basket frame		
Punched Model 2-S, L, XL	No.	60.73.586	Kit 4 deep-frying 1/6 GN portion baskets + portion basket frame	No.	60.75.979
Stir spatula			Portion baskets kit	No.	60.76.407
Model L, XL	No.	60.72.131	Portion baskets kit Model 2-S		
Boiling and deep-frying basket			Kit 6 punched 1/6 GN portion baskets + portion basket frame	No.	60.75.305
Boiling basket Model 2-XS	No.	60.74.970	Kit 6 unpuched 1/6 GN portion baskets	No.	60.75.306
Deep-frying basket Model 2-XS	No.	60.75.019	with lid + portion basket frame	140.	00.7 5.500
Boiling basket Model 2-S	No.	60.74.986	Kit 6 deep-frying 1/6 GN portion baskets +	No.	60.75.307
Deep-frying basket Model 2-S	No.	60.75.330	portion basket frame		
Boiling basket Model L, XL	No.	60.74.983	Portion baskets kit	No.	60.76.408
(Recommendation: 2 × for L and 3 × for XL)			Kit of 2 portion baskets		
Deep-frying basket Model L, XL (Recommendation: 2 × for L and 3 × for XL)	No.	60.75.391	Unpunched 1/6 GN with lid	No.	60.75.302
Arm for automatic lifting and lowering			Punched 1/6 GN	No.	60.75.303
Model 2-XS	No.	60.74.791	Deep-frying 1/6 GN	No.	60.75.982
			Kit 2 lids for 1/6 GN portion basket	No.	60.75.311
Model 2-S	No.	60.75.359			

60.75.909

60.74.666

60.75.975

60.74.832

No. 60.74.663

60.74.908

No. 60.75.129

Spaetzle colander Model 2-XS, 2-S

Model L, XL

### Setup.

# Care products.



Stands Model 2-XS			Grill cleaner		
With feet Dimensions W 1100   D 717   H 595 mm	No.	60.31.221	Grill cleaner 10 I	No.	9006.0153
With stainless steel feet	No.	60.31.538	Cleaning arm, incl. 4 pads		
Dimensions W 1130   D 717   H 595 mm			Cleaning arm, incl. 4 pads	No.	60.73.925
With castors Dimensions W 1100   D 717   H 595 mm	No.	60.31.317	Cleaning pads		
For plinth installation	No.	60.31.540	Kit of 2 hard cleaning pads	No.	60.73.922
Dimensions W 1100   D 717   H 460 mm			Kit of 2 soft cleaning pads	No.	60.73.923
Stands Model 2-S			Classification		
With feet	No.	60.31.319	Cleaning sponges		
Dimensions W 1100   D 899   H 595 mm			Kit of 6 cleaning sponges	No.	60.73.924
With stainless steel feet Dimensions W 1130   D 899   H 595 mm	No.	60.31.539	Cleaning kit		
With castors Dimensions W 1100   D 899   H 595 mm	No.	60.31.320	10 I grill cleaner, 1 cleaning arm, 2 hard cleaning pads, 2 soft cleaning pads, 1 cleaning sponge	No.	60.73.920
For plinth installation Dimensions W 1100   D 899   H 460 mm	No.	60.31.541			

### Installation.

# Transport.

Wall attachment kit			VarioMobil		
Model L	No.	60.75.993	1/1 GN Model 2-XS, 2-S	No.	60.73.349
Model XL	No.	60.75.934	Dimensions W 425   D 756   H 798 mm		
Kit for floor fastening			2/1 GN Model L, XL Dimensions W 620   D 863   H 806 mm	No.	60.70.107
Model L, XL	No.	60.72.905	Basket cart		
Unit attachment kit			Model 2-S, L, XL Dimensions W 418   D 591   H 1522 mm	No.	60.73.612
Model 2-XS, 2-S	No.	60.76.118			
			Oil cart		
Unit connection kit for drain water			Model L, XL	No.	60.74.941
Model 2-XS, 2-S	No.	87.00.745	Dimensions W 603   D 605   H 1096 mm		
Model L, XL	No.	87.00.746			
Storage space for substructure					
Model L	On red	quest			

Model L	On request
Model XL	On request
Panelling for substructure	
Model L	On request
Model XL	On request

### More information on original **RATIONAL** accessories at:

rational-online.com/ae/accessories

40

Model L

Model XL

Colander

Model L


Model XL

Model 2-XS

Model 2-S, L, XL

Rack

Model 2-XS, 2-S

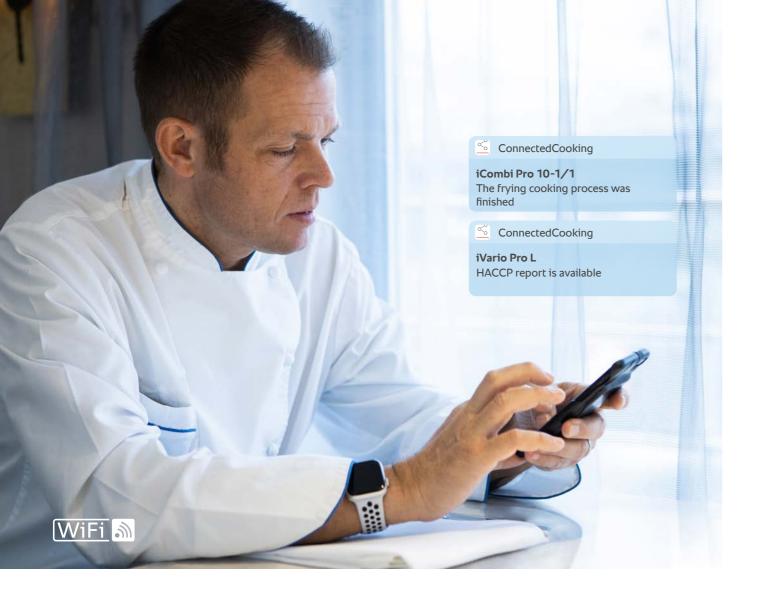

# ConnectedCooking.

# All under control.

ConnectedCooking Powerful networking by RATIONAL. Always keeps everything under control.

> rational-online.com/ae/ ConnectedCooking

Networking is moving forward – it all runs digitally, and it is all synchronised. Just like ConnectedCooking by RATIONAL. Recipe transfer, unit control, hygiene data, software updates and service remote access with the secure networking solution you can control everything from your desk. For all connected appliances. You can also access and save HACCP data from all appliances. Recipes travel at the touch of a button to the cooking systems. All you need is a PC, smartphone or tablet. Networking does not get easier than that.

### **RATIONAL** accessories.

# Robust. Durable. Tough.

Company	Contact person		
Street	Post code, city		
Phone	Fax		

◆ Contact your RATIONAL representative+971 4 338 6615

info@rational-online.com

#### Quote – please complete accordingly.

Item name	Articl	e number	Gastronorm	Quantity

42

#### RATIONAL Kitchen and Catering Equipment Trading FZCO

Block 2 Office 2218 Gold & Diamond Park Sheikh Zayed Road P.O. Box 126076 Dubai

**United Arab Emirates** 

T +971 4 338 6615 F +971 4 338 6673 M +971 50 915 3238

info@rational-online.com rational-online.com









