specifications


SIE PIE Refrigeration

RF7.UBR.3.GD

ReFlex Series, 3 Door (Glass), Underbench Fridge

Project:

Item No:

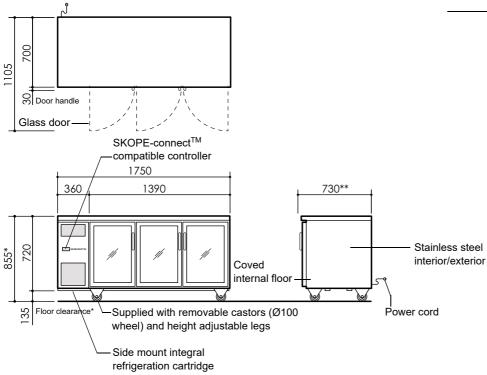

CABINET

Model ID RF7.UBR.3.GD

SKOPE ID RB3F

Doors 3 × self-closing, lockable, double glazed, double Low-E, glass swing

doors. LH, LH, RH

Internal door opening 3 × door openings: 560mm high × 360mm wide

Shelves 6 × adjustable height shelves: 4 × outside 395mm wide × 510mm deep, 2

 \times middle 455mm \times 510mm deep

Worktop Total thickness 45mm (0.7mm 304 AISI stainless steel over insulating

cyclopentane foamed core)

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable with SKOPE-connect 0°C to 15°C)

ELECTRICAL

Climate class 5 (40°C/40% RH)
Interior lighting 2 × 400mm, 4W LED light

Power cord Supplied with 2.6m, 10 Amp plug and lead 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 2.0 Amps (includes unit 1.5 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect[™] compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Side mounted, integral, removable refrigeration cartridge (part number

ULKCNI-0028)

Refrigerant R290 / 95g (natural refrigerant)

Nominal capacity 650 Watts

Heat rejection (Avg/peak) 160 Watts/185 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

DIMENSIONS			
	External	Internal	
Height	855mm*	570mm	
Width	1750mm	1280mm	
Depth	730mm**	530mm	
Floor area	1.28m ²		
Weight	135kg		
Internal volume	387 litres		

* With supplied castors fitted. See height variation below

** Includes 30mm door handle

Height variation	
Supplied castors	855mm
Supplied height adjustable legs	865mm - 905mm
No castors or legs	720mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements	
Тор	Not required
Sides	Not required
Back	Not required
Bottom	Not required

PSS0598 Rev. 1.0 Dec. 2019



