
## specifications

## RF7.UPR.2.SD

ReFlex Series, 2 Door (Solid), Upright Fridge



Project:

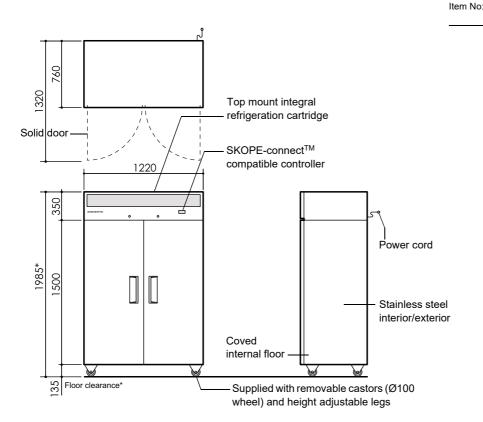

**CABINET** 

Model ID RF7.UPR.2.SD SKOPE ID RF7UPR2-SCTP-SD

Doors 2 × self-closing, lockable, solid swing doors. LH, RH lnternal door opening 2 × door openings: 1375mm high × 495mm wide

Shelves 10 × adjustable height shelves: 530mm wide × 530mm deep

Worktop n.a.

Material 304 AISI stainless steel interior and exterior

**PERFORMANCE** 

Max. ambient temp. 40°C

Temperature range 1°C to 4°C (adjustable with SKOPE-connect -2°C to 10°C)

**ELECTRICAL** 

Climate class 5 (40°C/40% RH)

Interior lighting 2 × 1200mm, 12W LED lights (door activated)
Power cord Supplied with 2.9m, 10 Amp plug and lead
Power supply 220-240 Volts a.c. 50 Hz, single phase supply

Current draw 2.0 Amps (includes unit 1.5 Amps)

**REFRIGERATION** 

Controller SCS Connect (SKOPE-connect<sup>TM</sup> compatible)

Connectivity interface Bluetooth® wireless technology

Refrigeration system Top mounted, integral, removable refrigeration cartridge (part number

UTKCNI-0018)

Refrigerant R290 / 90g (natural refrigerant)

Nominal capacity 650 Watts

Heat rejection (Avg/peak) 165 Watts/205 Watts
Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

## SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

_		ЛF				$\sim$
- 1	HIV.	/1	1		N	•

	External	Internal
Height	1985mm*	1395mm
Width	1220mm	1100mm
Depth	760mm	600mm
Floor area	0.93m <sup>2</sup>	, I
Weight	159kg	
Internal volume	920 litres	

<sup>\*</sup> With supplied castors fitted. See height variation below

leiç	ght	va	riation	
	-		_	

Supplied castors	1985mm
Supplied height adjustable legs	1995-2035mm
No castors or legs	1850mm

## Dimensional tolerances

Before installing this cabinet allow the following dimensional
tolerances:

toloralloos.			
Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5mm		
More than 1 metre	-5mm to +10mm		
	Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5mm	+15mm	
More than 1 metre	-5mm to +10mm	+15mm	

Ventilation requirements		
Тор	300mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	

PSS0589 Rev. 1.3 Aug. 2019



