specifications

Refrigeration

BB780X-4SW

BackBar X, 4 Door (Glass), Fridge

External Internal Height: 920mm* 758mm Width: 2620mm 2140mm

590mm


Floor area: 1.55m²
Gross volume 780L

Depth:

Height excludes castors, legs and optional worktop.

*Height variation	
Supplied height adjustable castors	1015mm - 1030mm
Supplied height adjustable legs	1050mm - 1080mm
No castors or legs	920mm

530mm

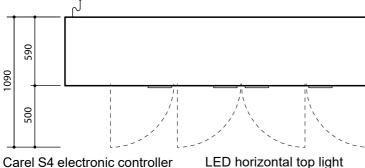

Power cord

2620

New look
cabinet front
L grip door
handles
Frameless look
glass doors

Side mounted integral refrigeration unit

CABINET SPECIFICATIONS

Doors 4 × self-closing, double glazed, toughened, single Low-E safety glass, frameless look

doors. Optional door locks.

Internal door opening size 4 door openings: 720mm high × 470mm wide

Shelves Two adjustable height shelves per door: 495/555mm wide × 440mm deep

Worktop (optional) Optional 25mm stainless steel worktop

Weight 230kg Electrical safety climate class 5

Internal lighting1 x 24W T8 Frosted LED Tube (Ø26 x 1500mm, 5500K) - SwitchedElectrical220-240 Volts a.c. 50 Hz, single phase supply, 4.5 Amps (unit 3.8 Amps)

Temperature range 2°C to 4°C (product mass average)

GEMS class M1

GEMS energy consumption 8.80 kWh/24h

GEMS annual running cost \$964 p.a. (@ \$0.30/kWh)

Refrigeration system Electronically controlled, side mounted, integral, removable refrigeration unit

(UE40ABF-100IC), with isolation switch

Electronic controllerCarel S4 EvoRefrigerantR134a / 455gNominal capacity750 Watts


Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2016 SKOPE Industries Limited

PSS0440 Rev. 2.21 Mar. 2021







Email: skope@skope.com Website: www.skope.com

