


## MED0140GD | Bromic MediFridge™ Display Chiller 145L

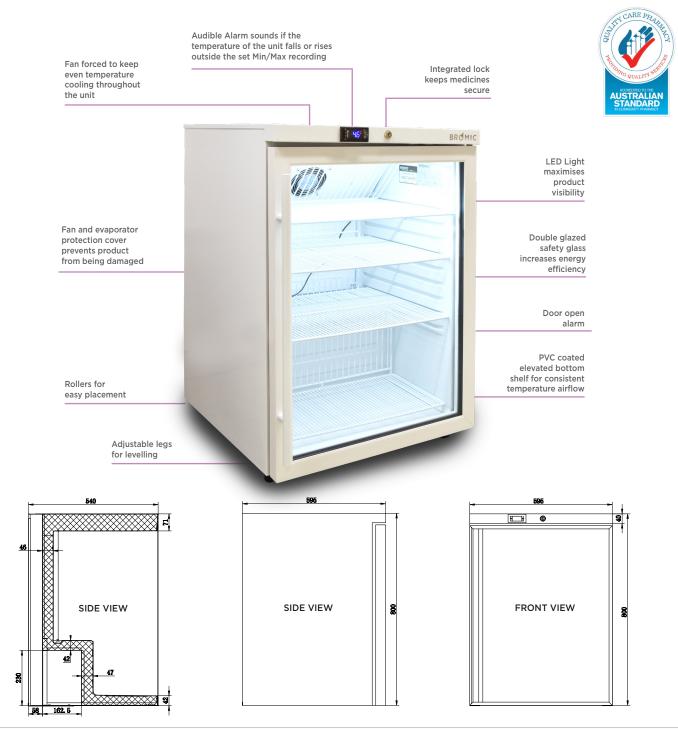

ATURES

Integrated temperature Alarm System ensures sensitive stock is maintained and managed according to requirements

Fan Forced air circulation ensures even temperature throughout the unit

Increased air circulation around the unit thanks to unique custom wire 'open rung' shelves at the top and bottom to prevent overstocking

Consistent air circulation throughout the unit ensures mandated temperatures of 2°C to 8°C

Backed by Bromic national services & warranty

SNO		External (mm)	Internal (mm)
$\frac{2}{5}$	Width	595	491
ž	Depth	595	510
Щ	Height	820	687

BROMIC Pty Ltd reserve the right to alter specifications without notice.



## **MED0140GD** | Bromic MediFridge™ Display Chiller 145L

Part Number	3736213	External (mm) Interna	(mm		
Capacity	145L	Width 595 49	91		
Weight	40kg	<b>Depth</b> 595 51	0		
Air Circulation	Fan-Forced	Height 820 68	7		
	Range+	+2°C to 8°C			
Taman a vatura	Max Ambient Temperatura	Pepth 595 510  Height 820 687  +2°C to 8°C  30°C  Yes  Digital  Powder Coated Sheet Metal  Low-E Glass + Argon Gas  Flat  Yes  Yes  Right hand hinged  595mm x 687mm  No  4  PVC Coated Wire open rung 7mm ap  3 Shelves at 365 mm 1 Shelf at 235 mm  Yes (middle 2 shelves only)  240V  50Hz  170W  1.26kWh/24hr  R134a  Digital  Yes, 10A  Yes  Yes  Yes  Yes  Yes  Yes  Yes  Ye			
Temperature	Min/Max Temp Recorder	Yes			
	Display	Digital			
Exterior Finish	Material	Powder Coated Sheet Metal	Powder Coated Sheet Metal		
	Solid or Glass	Low-E Glass + Argon Gas			
	Shape	Flat			
	Self-Closing	Yes			
Door	Door Lock	Yes			
	Door Style	Right hand hinged			
	Door opening (W x H)	595mm x 687mm			
	Reversible	No 4			
	No. of Shelves	4	4		
	Style of Shelves	Yes Yes Right hand hinged 595mm x 687mm No 4 PVC Coated Wire open rung 7mm apart 3 Shelves at 365 mm 1 Shelf at 235 mm Yes (middle 2 shelves only) 240V 50Hz 170W 1.26kWh/24hr R134a	apart		
Shelves	Depth of Shelf				
	Adjustable	Yes (middle 2 shelves only)			
	Voltage	240V			
	Frequency	ble Yes (middle 2 shelves only) 240V 50Hz			
ShelvesNo. of Shelves4Style of ShelvesPVC Coated Wire open rung 7Depth of Shelf3 Shelves at 365 mm 1 Shelf at 235 mmAdjustableYes (middle 2 shelves only)Voltage240VFrequency50HzInput Power170WPower Consumption1.26kWh/24hrRefrigeration SystemRefrigerant TypeR134aElectronic ControllerDigital					
	Power Consumption	1.26kWh/24hr			
	Refrigerant Type	R134a			
Refrigeration System	Electronic Controller	Digital			
Australian Standard Plug	Туре	Yes, 10A			
	Temperature	Yes			
Alarms	Door	Depth   595   510   Height   820   687			
	Audible & Visual	Yes			
Lighting	LED Internal Light	Yes			
_	Automatic	Yes			
Defrost	Type of Defrost System	OFF Cycle			
Insulation Type	Cyclopentane				
Footing	30mm Feet at Front. Rollers at back				
Approvals	Quality Care Pharmacy Program Com MEPS, The Pharmacy Guild of Austral				
Warranty	2 year warranty				
Data Logger	Available, part #350700050				