
## specifications



## **VF1500X**

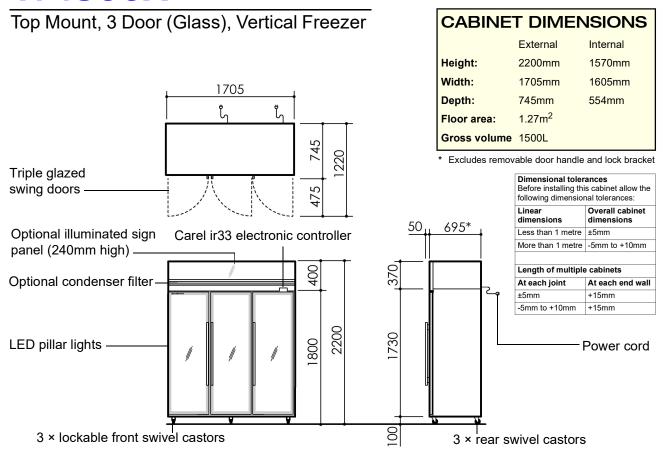

## **GENERAL SPECIFICATIONS**

**Doors** 3 × self-closing, triple glazed, heated, argon filled, toughened safety glass swing doors (hinged LH, RH,

RH)

Weight 372 kg

Shelves Adjustable height wire shelves:

10 × side wire shelves: 502mm wide × 467mm deep  $5 \times \text{middle}$  wire shelves: 571mm wide × 467mm deep

Sign Replacement sign panel. Optional lit sign available with 1 × 24 Watt 1500mm T8 LED tube

Electrical safety climate class | 5

Internal lighting 3 × 20 Watt 1400mm LED strip pillar lights

**Power supply** 220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 2 × 10 Amp 3-Pin plug

Current draw 14 Amps
Temperature range -18°C to -21°C

GEMS class L1

www.intlcert.com

GEMS energy consumption 38.12 kWh/24h

GEMS annual running cost \$4,177 p.a. (@ \$0.30/kWh)

Refrigeration system 2 × top mounted SKOPE Cyclone freezer unit with electronic controller (UF40ACD) (5.3 Amps)

Refrigerant R452A / 700g (×2)

Nominal capacity 1504 Watts (2 × 752 Watts) @ -30°C evaporator, 50°C condenser

Electronic controller 2 × CAREL ir33 electronic controller (1 per freezer unit)

**Drainage** No plumbing required

 ${\sf SKOPE\ Industries\ Limited\ reserve\ the\ right\ to\ alter\ specifications\ without\ notice.\ Copyright\ @\ 2016\ SKOPE\ Industries\ Limited\ and\ property and\ prop$ 





New Zealand Free phone: 0800 947 5673, Australian Free phone: 1800 121 535

Email: skope@skope.com Website: www.skope.com



PSS0436 Rev. 1.91 Jul. 2020