

## AL

### Premium Passthrough Dishwasher W 750mm x D 750mm x H 1530mm

The Washtech AL is a premium passthrough dishwasher that features our most advanced technologies, including our assured rinse and advanced filtration systems, alongside premium touches such as full thermal and acoustic installation to provide an optimal working environment around the machine. The AL's intuitive electronic controls provide Soft Start, EcoPower, customisable cycles, chemical adjustability and immediate fault diagnosis.

With economical water consumption rates and powerful rinse heating, the AL provides excellent wash results while being light on operating costs and the environment. The powerful wash pump enables shorter cycles of 40, 60 and 90 seconds, making the AL the perfect machine for fast paced kitchens.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech AL will not let you down.

#### Special Features

- Powerful 1.5HP wash pump
- Assured rinse – fitted with break tank and rinse pump for optimal sanitising rinse results even when running on cold and/or low pressure inlet water
- Hands-free AutoDrain with enhanced filtration
- Full insulation to reduce noise and heat emissions

#### Standard Features

- Autostart on hood closure
- 40, 60 and 90 second cycles
- Capacity of up to 1,620 plates / 2,250 glasses per hour
- Low water consumption of 2.4 litres per cycle
- Heavy-duty stainless steel construction and wash manifold
- Heavy-duty stainless steel componentry including heavy duty scrap tray
- Advanced electronic controls
- Soft start wash cycle
- Easy installation with:
  - Water supply hose
  - Detergent and rinse aid pumps with injector lines
  - Drain pump with outlet hose
- Self-cleaning cycle
- EcoPower – reduced temperatures and energy consumption when machine is idle
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty

#### Includes:

- 2 x 500mm dish rack (600 70029)
- 1 x 500mm cup rack (600 70028)
- 1 x cutlery basket (C660508)
- 1 x cutlery container (C660503)



## AL



moffat.com.au  
washtech.com.au

**Moffat Pty Limited**

### VIC/TAS/SA

70 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Fax 03-9518 3833  
vsales@moffat.com.au

### NSW

Telephone 02-8833 4111  
nswsales@moffat.com.au

### QLD


Telephone 07-3630 8600  
qldsales@moffat.com.au

### WA


Telephone 08-9413 2400  
wasales@moffat.com.au

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
Version: WAL0020 2007

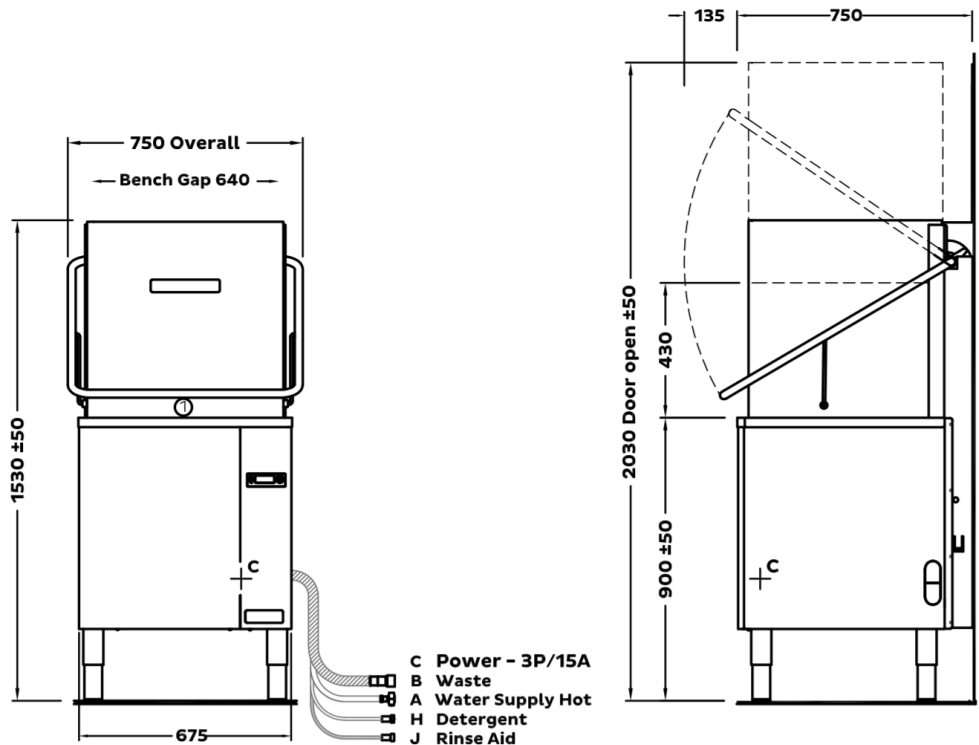

### Bench detail

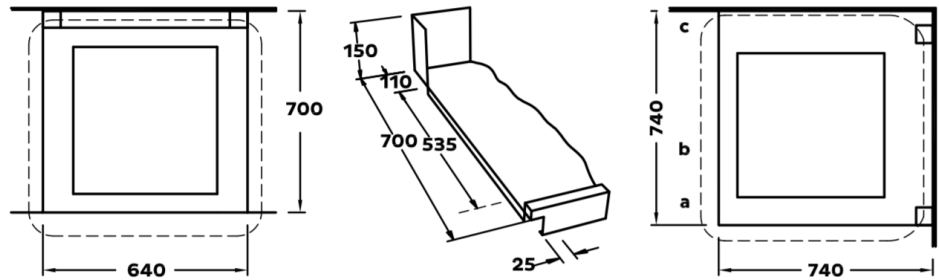

### A - Hot Water\*

Temperature 65°C  
Connection 3/4" male; hose supplied  
Pressure 100-350kPa  
Flow 10 litres per min  
Quality Potable - refer table  
Backflow Prevention AVB  
Consumption 2.4 litres per cycle

### B - Waste

Connection Hose supplied for open standpipe  
750 high or connection to sink trap

C - Electrical	V	Hz	A/phase	Max kW
Three Phase	415	50	15	10.12

### Dimensions

	Machine	Packed
Width (mm)	750	800
Depth (mm)	750	950
Height (mm)	1530	1475
Weight (kg)	120	140
Volume (m <sup>3</sup> )		1.10

### Water Quality

	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl <sup>-</sup>		100
SO <sub>4</sub>		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl <sub>2</sub>		0.1

### Corner Installation Notes

- Machine must face left for easy access to controls
- Allow 300 clearance to front for service access
- Splashback return must be no higher than 150

Isolating switch must be within 1m of, and not directly behind the machine.

\* Suitable for connection to cold inlet water. For optimal productivity, use hot inlet water.

Refer to operator manual for installation instructions.



an Ali Group Company



The Spirit of Excellence

