

XU

Economy Undercounter Dishwasher – 500mm Rack

W 570mm x D 635mm x H 840mm

The new XU is a full height undercounter 500mm rack dishwasher with classic Washtech electromechanical controls for long term reliability.

Standard Features

- Low hot water consumption 2.6 litres per cycle
- Up to 600 plates per hour
- Quickstart two minute cycle
- Classic electromechanical controls
- Double filtration system
- Dual chemical injectors
- Drain pump
- Upper and lower wash & rinse arms with precision moulded jets
- Recirculates wash water at nominal 200 litres per minute
- 2.5kW wash and 3kW rinse heating
- 350mm door clearance
- Suits 500mm international racks
- Magnetic door safety switch
- Stainless steel construction
- Easy install
 - Water supply hose
 - Dual chemical injector lines
 - Drain pump outlet hose
 - 15 amp plugset
- No commissioning required
- Watermark certified

Includes:

- 1 x 6007028 – 500mm dish rack
- 1 x 6007029 – 500mm cup rack
- 1 x C660503 – cutlery container




The unit shall be a Washtech undercounter dishwasher with Watermark certification. The dishwasher shall have upper mounted controls with a two minute complete operating cycle. The unit shall be supplied with 500mm cup and dishracks and the wash compartment shall be 350mm tall. The unit shall be fitted with rotating upper and lower wash and rinse arms, detergent injector, rinse fluid injector, and drain pump. Hot water consumption shall be 2.6 litres per operating cycle and electrical supply requirement 15 amp single phase. The unit shall be supplied with 500mm all plastic cup and dishracks and shipped in 100% recyclable shipping packaging.



XU

Economy Undercounter Dishwasher - 500mm Rack

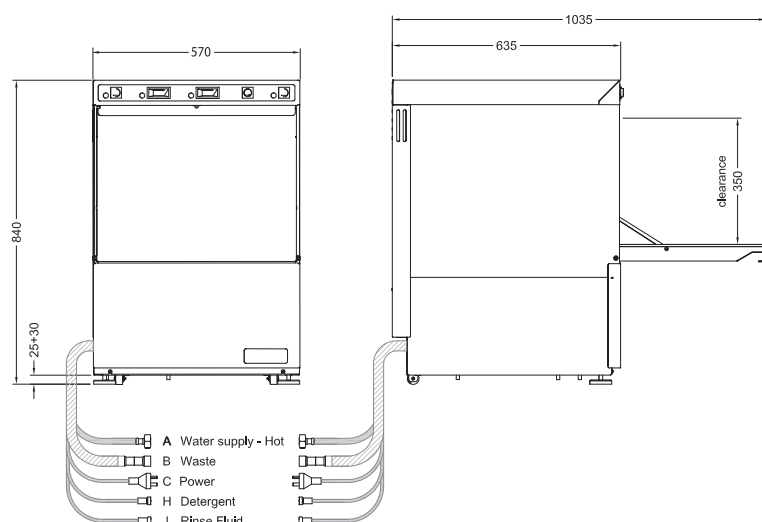

Australia
www.moffat.com.au

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

- A Hot Water**
temperature 65°C
connection 3/4
pressure 200-350kPa
flow 20 litres per min
quality potable & soft
- B Waste**
connection 1.5 BSP
hose supplied
- C Electrical**
Single phase 240V 50Hz 15 amp
plugset supplied

Dimensions
Width 570mm
Depth 635mm
Height 840mm
Weight 60kg

Packed Dimensions
Width 720mm
Depth 690mm
Height 970mm
Weight 77kg
Cubicmetres 0.48m³

Refer operator manual for complete
installation instructions