

ONWAVE 2 HP

MULTI-DECK CHILLER

FEATURES INCLUDE:


Black internal
RAL 9002 grey white external
RAL 9007 Base Panel
High efficiency fan motors
Stainless steel bumper to front of case
4 levels adjustable shelves + base

Shelf pricing holders
Canopy lighting inc switch
Internal canopy mirror
Electronic temperature control
Manual night blind
Castor wheels
Shelf product fences



ONWAVE 2 HP 4E / MIR360

MULTI-DECK CHILLER

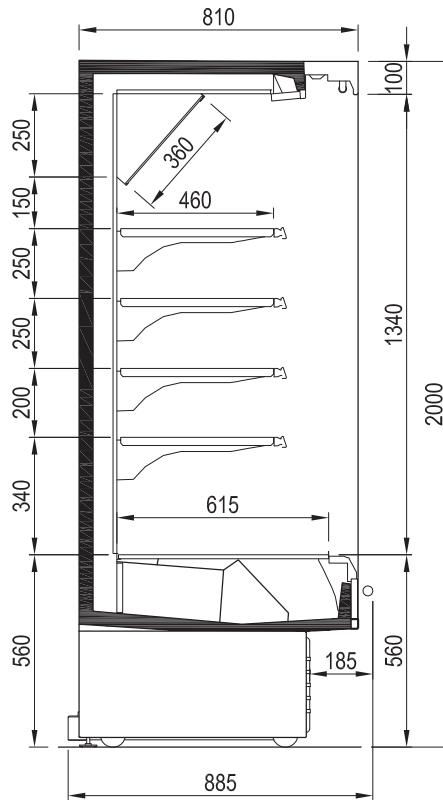

ONWAVE2 4E/MIR360	120	180	240
* Operating Temp (°C)	0/+8	0/+8	0/+8
Refrigeration	Ventilated	Ventilated	Ventilated
Defrost	Automatic	Automatic	Automatic
Power supply required	1ph / 10amp	1ph / 15 amp	1ph / 15amp
Nominal Power (w)	1357	1790	2609
Lighting power (w)	54	78	108
Display Surface (m ²)	2.88	4.33	5.77
Length (mm)	1310	1935	2560
Depth with bumper(mm)	885	885	885
Height inc castors (mm)	2000	2000	2000
Weight with packaging (kg)	240	260	410
Weight w/o Packaging (kg)	220	240	380
M.E.P.S. rating	3M2	3M2	3M2

* Climate class 3 (25°C, 60%RH)

Information supplied as a guide only and is subject to change without notice.

RTA: AU10320

Head Office – WA 6 Parkland Road, Osborne Park WA 6017
 Victoria Branch 63 Yale Drive, Epping VIC 3076
 New South Wales Branch 6 Grevillea Place, Eastern Creek, NSW 2766
 Queensland Branch 157 Bluestone Circuit, Seventeen Mile Rocks QLD 4073
 South West WA Branch Unit 2, 1 Halifax Drive, Bunbury WA 6230
 South Australia Branch 26 Cavan Road, Dry Creek SA 5094

Phone 08 9242 5000 Fax 08 9242 5055
 Phone 03 9401 1366 Fax 03 9401 1566
 Phone 02 8856 7900 Fax 02 8856 7999
 Phone 07 3363 7900 Fax 07 3363 7999
 Phone 08 9726 0500 Fax 08 9726 0400
 Phone 08 8368 2300 Fax 08 8368 2399

BAKER
REFRIGERATION