

Product Information:

- High performance hood-type dishwasher with pre-fitted, easy to install energy savings device (ESD)
- **E-Management:** intuitive and advanced electronic interface
- **PRS System:** break tank, 316 atmospheric boiler, rinse booster pump
- **HD System:** for maximum uninterrupted performance
- **ES System:** energy savings device (ESD)
- Four wash cycles 90/120/180 seconds, and 9 minute deep clean
- Green standby function that reduces energy consumption when idle
- Low water consumption of 2.5 litres per cycle, minimising water, energy and detergent use
- Pressed wash tank with rounded corners, for increased hygiene
- Stainless steel wash and rinse arms
- Robust upper tank scrap filters in stainless steel
- Manual lift with fully enclosed rear, 3 spring support
- Automatic drain pump with self-cleaning function
- Vertical self-draining wash pump
- Built in thermostop, ensures correct rinse temperatures
- Built in detergent and rinse-aid injection
- **18-months parts and labour warranty**

Included Accessories:

- 1 x flat cup basket 500x500mm
- 2 x peg plate basket 500x500mm
- 1 x cutlery insert
- 1 x water inlet hose, length 1.5m
- 1 x drain hose, length 2.0m
- Fitted with 150mm adjustable legs

Optional Accessories:

- Twin hood system
- Remote interface
- Inlet and outlet benches
- Additional baskets




Specifications:

Model	AH800EES
W x D x H (mm)	657 x 793 x 2294
<small>Note: Dimensions do not include handle. Hood open</small>	
Weight	163kg
Packed Dimensions (mm)	770 x 930 x 1870
Packed Weight	182kg
Total Connected Load	9.55kW / 25A circuit L1 = 12A / L 2 = 9A / L3 = 20A
- Convertible to:	6.75kW / 15A Circuit
(Low Power Option)	L1 = 12A / L 2 = 9A / L3 = 11A
<small>Note: Unit can be converted to low power option on site by a qualified electrician. This may affect the output of the unit.</small>	
Electrical Connection	3Ø+N+E 415VAC / 50Hz (Lead fitted, on-site connection)
Water Quantity Per Cycle	2.5 Litres
Water Connection	1.5m Hose / 3/4" BSP
Water Inlet Pressure	100 - 500KPA
Tempered water supply	10°C - 25°C
Waste Connection	2m Hose / ø20.5mm

Legend:

A Electrical Connection	D Detergent Line
B Water Connection	E Rinse-Aid Line
C Drain Connection	

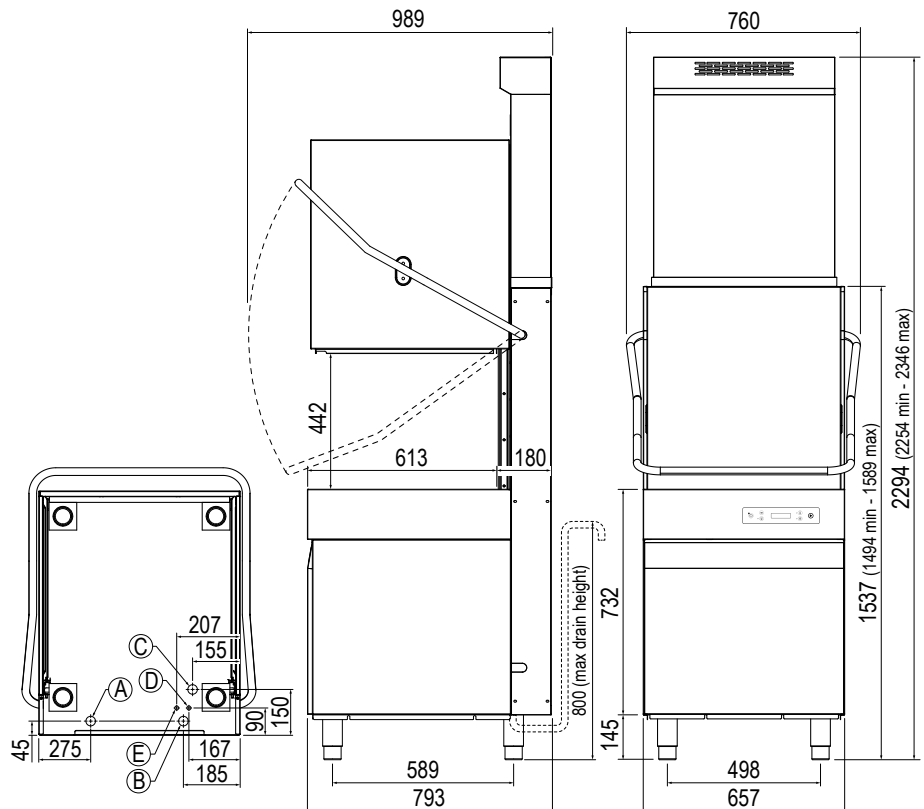

Due to continuous product research and development, the information contained herein is subject to change without notice.
Revision: A - 17/05/2024 - 03

