

ALTO SHAAM 750-TH/II

LOW TEMPERATURE COOK AND HOLD OVEN

Single compartment oven with either manual or electronic controls. (750-TH/111 features a digital control that includes 8 programmable menu buttons)

Oven is equipped with side racks with pan positions spaced on 35mm centers, 2 x stainless steel wire shelves, stainless steel drip pan with drain and external drip tray and casters.



STANDARD FEATURES

- HALO HEAT a controlled, uniform heat source that maintains close temperature tolerances throughout the cooking and holding function. Offers uniform and consistent cooking on a daily basis, low shrinkage of bulk or portion-cut protein items, higher food moisture content, and significantly longer holding life.
- Cooks, roasts, re-heats, and holds in the same cabinet with set-and-forget controls to provide a better distribution of work loads.
- Cooks by time and automatically converts from cook mode to hold mode.
- Oven hoods, outside venting, and fire extinguisher systems are not required (IN MOST AREAS).
- Stackable design for additional capacity.
- Antimicrobial handle retards the growth of illness-causing pathogens.


SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


From the world of Concater!



ALTO SHAAM 750-TH/II



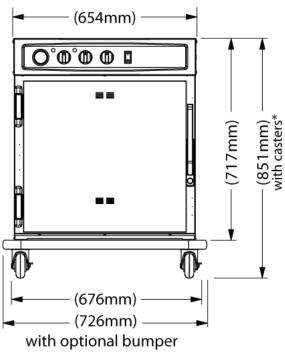



- *(807mm) with optional casters
- *(894mm) with optional casters
- *(874mm) with optional legs

DIMENSIONS

External Dimension: 851H x 676W x 805D mm

Internal Dimensions: 510H x 559W x 673D mm

TECHNICAL DATA

Power Supply	15 amp single phase. 240 Volts
Voltage	240
Phase	1
Hertz	50
Amps	10.4
kW	2.4

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



PROUDLY DISTRIBUTED BY: