



## PRODUCT ADVANTAGES

- **Double capacity:** the double wide wash chamber can cover 2 racks or bigger containers
- **VISIOTRONIC Control:** ensures a simple and intuitive operating with a single button. When the display is activated by a proximity sensor, all the necessary information appears in the large display, in clear text or in the form of symbols
- **Exhaust energy storage:** the fully enclosed 4-sided hood keeps steam and energy inside the system: energy saving up to 6 kW/h; less humidity in the kitchen area and better hygienic conditions
- **SENSO-ACTIVE Resource Management:** constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result. This reduces the amount of fresh water used per rinse cycle up to 2.0 l
- **CLIP-IN Wash and Rinse Arms:** both the wash and rinse arms can be lifted out of the wash chamber and replaced with one hand and without any tools
- **Filter position sensor:** prevents operation without tank strainer
- **Intelligent energy management:** the available energy is used continuously. Thus, at a low total loading value the heating time gets reduced
- **EASY-CLEAN Concept:** blue markings in the machine help the operator to identify the components which require cleaning
- **OPTIONAL VAPOSTOP** hood system available on request (additional charge)
- Double rack hood-type dishwasher for straight or corner installation
- Normal capacity up to 120 racks/h / 2,160 plates / h or 4,320 glasses / h
- 6 automatic cycles: short, standard, intensive, starch removal, permanent, hygiene
- Heat and noise insulated
- Self cleaning program
- Strainer control sensor
- Refill signal for detergent / rinse aid
- USB-Interface for operational data download
- Ready to install - equipped with: fill/drain hoses, electrical cable, detergent & rinse aid dispensers, rinse pump, drain pump, back flow preventer (Watermark approved)
- 4 - plate racks P-18-12
- 1 - cutlery rack C-01-07
- Multi setting: Booster can be reduced from 12.4kW to 6.2kW if connected to hot water


## TECHNICAL DATA

Cycle times (*)	60 / 90 / 180 sec. and special cycles
Water consumption	2.0 l/rack
Tank capacity	40 l
Tank heating	3.3 kW
Power supply	400 / 50 / 3N
Booster loading	
Standard	12.4 kW
Alternative	6.2 kW
Total loading	
Standard	19.4   3 x 32 A
Alternative	12.5   3 x 20 A
Wash pump	2 x 0.7 kW
Rack size	500 x 500 mm
Loading height	440 mm
Noise level	68 dB (A)
Weight (gross / net)	212 / 180 kg


## CONNECTIONS

① Drain hose	2,000 mm   ID 20 / OD 25
② Supply hose	2,000 mm   R 3/4"
Flow pressure	0.5 bar
Max. supply water temperature	60 °C
Required flow rate	5 l/min
③ Power cord	2,500 mm
Supply hose for	
④ Detergent	2,000 mm
⑤ Rinse aid	2,000 mm

## DIMENSIONAL DRAWING

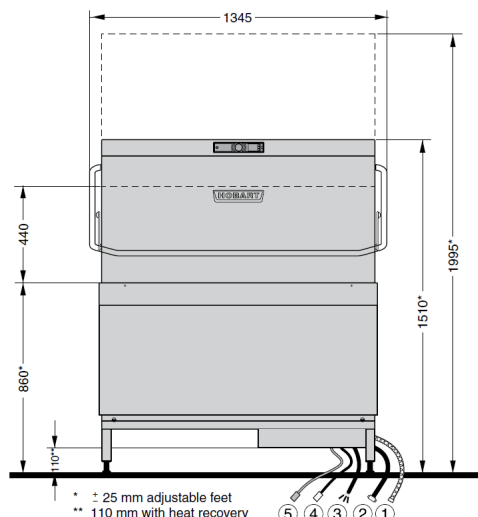

MADE IN GERMANY

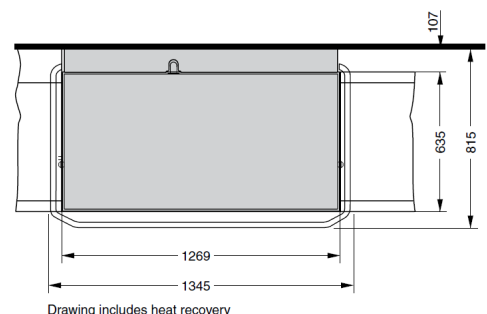

Drawing includes heat recovery

\* Thermostop guarantees required rinse temperatures. The actual cycle time extends accordingly if the machine is connected to cold water.

\* For corner installations keep the right side of the machine accessible for service.

\* For machine protection water hardness should not exceed 3°dH. If higher we recommend using a water softener - ask your Hobart representative for assistance.