

Product Information


- Monoblock refrigeration system, for improved performance and ease of servicing
- Adjustable digital temperature controller (0°C - 6°C)
- Unique fan forced ducted cooling for uniformed performance throughout the entire refrigerator
- Protective coating on refrigeration coil to help prevent corrosion
- Environmentally friendly R290 Hydrocarbon refrigerant
- Efficient LED lighting for increased product visibility
- Stainless Steel worktop as standard, 840mm finish height. (Optional 900mm working height model available)
- 1/1GN shelf configuration with adjustable runners (2 shelves per door)
- 60mm CFC free polyurethane insulation
- Efficient and hygienic cleaning made easy with an innovative internal design
- High quality components including highly efficient compressors and EC fans
- Double glazed heated glass door for exceptional display and minimal condensation. Self-closing, lockable doors
- Removable filter for easy cleaning
- Equipped standard with lockable castors designed for heavy-duty use
- 3 and 4 door models also available, with glass or solid doors



Designed & Engineered in Australia to meet Australian Standards
24 Months on-site parts and labour warranty

Specifications

Model	AXR.UCGN.2G
W x D x H (mm)	1360 x 700 x 840
Weight	107kg
Packed Dimensions (mm)	1390 x 730 x 880
Packed Weight	126kg
Net Capacity	184 Litres
Operation	0°C - 6°C
Refrigerant	R290
Climate Class	4M1
Energy Consumption	2.37kWh/24hr
Max Ambient	38°C
Total Connected Load	0.36kW
Electrical Connection	1Ø+N+E 230VAC / 50Hz 10A plug & lead

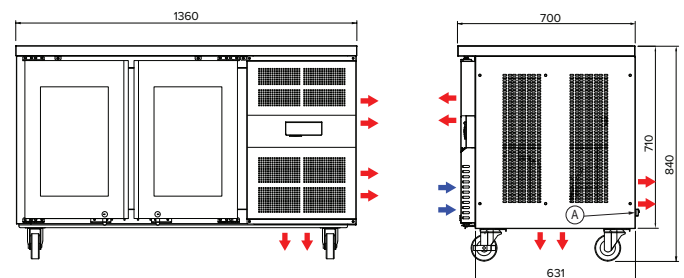

Legend

A Electrical Connection

Accessories

Shelf Kit - AXR.UCGN.SHELFKIT
 1/1GN shelf with runners