

### Product Information


- Monoblock refrigeration system, for improved performance and ease of servicing
- Adjustable digital temperature controller (0°C - 6°C)
- Unique fan forced ducted cooling for uniformed performance throughout the entire refrigerator
- Protective coating on refrigeration coil to help prevent corrosion
- Environmentally friendly R290 Hydrocarbon refrigerant
- Efficient LED lighting for increased product visibility
- Stainless Steel worktop as standard, 840mm finish height. (Optional 900mm working height model available)
- 1/1GN shelf configuration with adjustable runners (2 shelves per door)
- 60mm CFC free polyurethane insulation
- Efficient and hygienic cleaning made easy with an innovative internal design
- High quality components including highly efficient compressors and EC fans
- Self-closing, lockable doors
- Removable filter for easy cleaning
- Equipped standard with lockable castors designed for heavy-duty use
- 2 and 3 door models also available, with glass or solid doors



**Designed & Engineered in Australia to meet Australian Standards**  
**24 Months on-site parts and labour warranty**

### Specifications

<b>Model</b>	AXR.UCGN.4
<b>W x D x H (mm)</b>	2230 x 700 x 840
<b>Weight</b>	151kg
<b>Packed Dimensions (mm)</b>	2260 x 760 x 880
<b>Packed Weight</b>	176kg
<b>Net Capacity</b>	368 Litres
<b>Operation</b>	0°C - 6°C
<b>Refrigerant</b>	R290
<b>Climate Class</b>	4M1
<b>Energy Consumption</b>	5.01kWh/24hr
<b>Max Ambient</b>	40°C
<b>Total Connected Load</b>	0.37kW
<b>Electrical Connection</b>	1Ø+N+E 230VAC / 50Hz 10A plug & lead

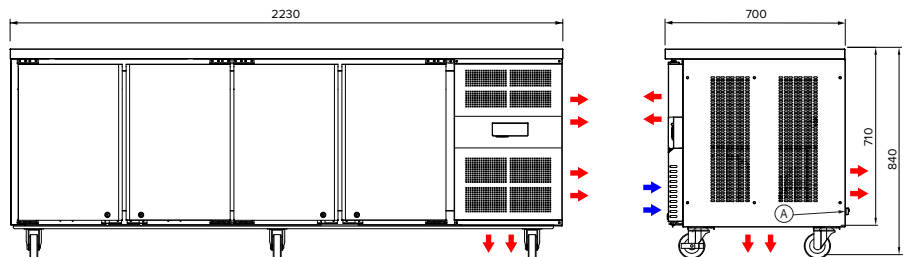

### Legend

**A** Electrical Connection

### Accessories

**Shelf Kit -** AXR.UCGN.SHELFKIT  
 1/1GN shelf with runners