

CB1265A-HC-DP



Self-contained ice maker - Sprayer system Daily production up to 138 kg

Brema's CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.

The Brema CB1265A is a free-standing ice cube machine that produces 134kg of ice per 24 hours and has storage capacity of 65kg.

The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.

Features

- - Compact and crystal cube AISI 304 SS Scotch Brite finish
- Tropical class +43°C rated Cleanable antiscale filter

- Air cooling system
 Easy cleanable internal rounded surfaces
 - HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Standard and special voltages 65kg storage capacity

- Produces 13g cubes Automatic Washing System (AWS)
- R290 refrigerant (HFC Free)
- Integrated Drain Pump (DP)

















- Water inlet hose
- Drainage hose
- External water filter Pressure limiting valve
- Plastic ice scoop
- Adjustable stainless steel legs (4)





Automatic Washing System



Adjustable Stainless Steel feet



Removable and cleanable air filter



Easy cleanable internal rounded surfaces



Disappearing insulated door

Ice cube size



Production 24h

Air temp.	Water temp.	kg
10° C	7° C	138
21° C	15° C	134
32° C	21° C	106

3 Years Warranty

Certifications available for this model

























www.comcater.com.au



1300 309 262




contactus@comcater.com.au



CB1265A-HC-DP



Self-contained ice maker - Sprayer system Daily production up to 138 kg

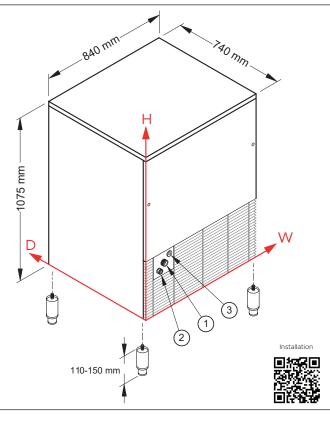

Working conditions

Location: Indoor

	Min	Max
Ambient temperature	+10°C	+43°C
Water temperature	+3°C	+32°C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Integrated drain pump benefits

- Reduced installation costs with the ability to position the ice maker up to 4 meters away from a drain.
- Plug and play easy installation makes setting up your ice maker quicker and easier.
- Superior hygiene as excess water is moved out of the ice maker creating a more sanitary environment.



Connections

All measures are referred to the rear bottom-left corner (W-H-Ø)

- Water in.: 141mm 290mm 3/4" (2) Water out.: 79mm 245mm 24mm
- (3) Electrical connections.: 186mm 326mm

Technical Information

Production in 24h	134kg	
Store capacity, up to	65kg	
Cooling system	A	
Kind of cube (standard)	D-13g	
Kind of cube (non-stock)	A-18g, C-33g, E-42g, B-60g	
Refrigerant	R290	
Standard voltage	240V ~ 50 Hz - 15A (lead with plug supplied)	
Power consumption*	1050W	

Finish	AISI 304 stainless steel
Clearance	100mm sides + back
Water consumption	A: 2.8l/kg
Sizes (W-D-H)	840 - 740 - 1075
Sizes with pack (W-D-H)	880 - 785 - 1245
Net weight	113kg
Gross weight	133kg

All the technical information need to be considered at the following conditions:

Sizes without feet

Standard Cube (13 g)

Ambient temperature +21°C Water temperature +15°C

*Average power consumption at +43°C (standard voltage)

Models and specifications are subject to change without notice





www.comcater.com.au





contactus@comcater.com.au