

BREMA CB1265A

SELF-CONTAINED ICE CUBE MACHINE

Brema's flagship CB range offers selfcontained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.


The Brema CB1265A is a free-standing ice cube machine that produces 130kg of ice per 24 hours and has storage capacity of 65kg.

The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.



STANDARD FEATURES

- 130kg production per 24 hours
- 65kg storage capacity
- Produces crystalline 13g cubes
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Fully insulated internal storage bin
- Disappearing door
- Electromechanical operation
- Stainless steel spray arm



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

from the world of Comcater!

National Head Office 156 Swann Drive Derrimut VIC 3030 Tel: +61 3 8369 4600 Fax: +61 3 8369 4695 Melbourne 96-100 Tope Street

South Melbourne VIC 3205 Tel: +61 3 8369 4600 Fax: +61 3 8699 1299

Sydney

20/4 Avenue of the Americas Newington, NSW 2127 Tel: +61 2 9748 3000 Fax: +61 2 9648 4762

Brisbane

1/62 Borthwick Avenue Murarrie QLD 4172 Tel: +61 7 3399 3122 Fax: +61 7 3399 5311


Unit 4/35 Westchester Road

Malaga WA 6090 +61 8 9248 9290 Tel: Fax: +61 8 9248 1903



BREMA CB1265A



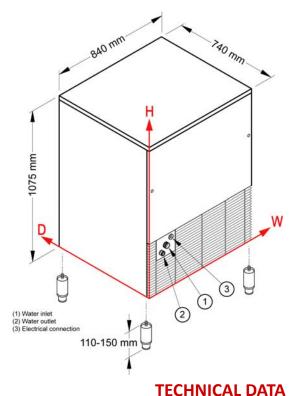

DIMENSIONS

840W x 740D x 1075*H mm (*add 110-150mm for adjustable legs)

CONNECTIONS

3/4" Water inlet, 24mm Water outlet & Electical connection

130 kg 65 kg

Storage Capacity Cooling System

Production 24h

Cube

Air 13 g

Refrigerant

R404A

Electrical Consumption

1050W

Power Requirements

240V 15amp

100 mm

Weight

113 kg

100 mm

STANDARD ACCESSORIES

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- Adjustable stainless steel legs (4)

CONNECTIONS	W	Н
Water inlet	141 mm	290 mm
Water outlet	79 mm	245 mm
Electrical connection	186 mm	326 mm
Clearances	Rear:	Sides:

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



PROUDLY DISTRIBUTED BY: