

# **BREMA CB249A**

#### **SELF-CONTAINED ICE CUBE MACHINE**

Brema's flagship CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.

The Brema CB249A is a bench top ice cube machine that produces 28kg of ice per 24 hours and has storage capacity of 9kg.

The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.



### STANDARD FEATURES

- 28kg production per 24 hours
- 9kg storage capacity
- Produces crystalline 13g cubes
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Fully insulated internal storage bin
- Disappearing door
- Electromechanical operation
- Stainless steel spray arm

13g Cubes

WHERE

AND ADDRESS OF THE STREET OF THE STREET

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

### from the world of Comcater!

National Head Office 156 Swann Drive Derrimut VIC 3030 Tel: +61 3 8369 4600 Fax: +61 3 8369 4695 Melbourne 96-100 Tope Street

South Melbourne VIC 3205 Tel: +61 3 8369 4600 Fax: +61 3 8699 1299 Sydney 20/4 Avenue of the Americas Newington, NSW 2127 Tel: +61 2 9748 3000

Fax: +61 2 9648 4762

Brisbane 1/62 Borthwick Avenue Murarrie QLD 4172 Tel: +61 7 3399 3122

Fax: +61 7 3399 5311


Perth Unit 4/35 Westchester Road Malaga WA 6090 Tel: +61 8 9248 9290

Fax: +61 8 9248 1903



# **BREMA CB249A**



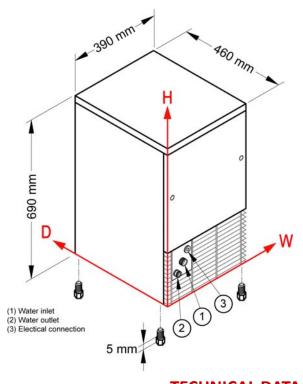

### **DIMENSIONS**

390W x 460D x 690\*H mm (\*add 5mm for foot)

### **CONNECTIONS**

3/4" Water inlet, 24mm Water outlet & Electical connection

### **TECHNICAL DATA**

Production 24h	28 kg
Storage Capacity	9 kg
Cooling System	Air
Cube	13 g
Refrigerant	R404A
Electrical Consumption	370W
Power Requirements	240V 10amp
Weight	37 kg

## **STANDARD ACCESSORIES**

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- 5mm plastic feet (4)

CONNECTIONS	W	Н
Water inlet	111 mm	175 mm
Water outlet	49 mm	130 mm
Electrical connection	156 mm	211 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



PROUDLY DISTRIBUTED BY: