

## BREMA CB416A

### SELF-CONTAINED ICE CUBE MACHINE

Brema's flagship CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.

The Brema CB416A is an under bench ice cube machine that produces 42kg of ice per 24 hours and has storage capacity of 16kg.


The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.



### STANDARD FEATURES

- 42kg production per 24 hours
- 16kg storage capacity
- Produces crystalline 13g cubes
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Fully insulated internal storage bin
- Disappearing door
- Electromechanical operation
- Stainless steel spray arm

### 13g Cubes



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

*from the world of Comcater!*

**National Head Office**  
156 Swann Drive  
Derrimut VIC 3030  
Tel: +61 3 8369 4600  
Fax: +61 3 8369 4695


**Melbourne**  
96-100 Tope Street  
South Melbourne VIC 3205  
Tel: +61 3 8369 4600  
Fax: +61 3 8699 1299

**Sydney**  
20/4 Avenue of the Americas  
Newington, NSW 2127  
Tel: +61 2 9748 3000  
Fax: +61 2 9648 4762

**Brisbane**  
1/62 Borthwick Avenue  
Murarrie QLD 4172  
Tel: +61 7 3399 3122  
Fax: +61 7 3399 5311

**Perth**  
Unit 4/35 Westchester Road  
Malaga WA 6090  
Tel: +61 8 9248 9290  
Fax: +61 8 9248 1903

# BREMA CB416A

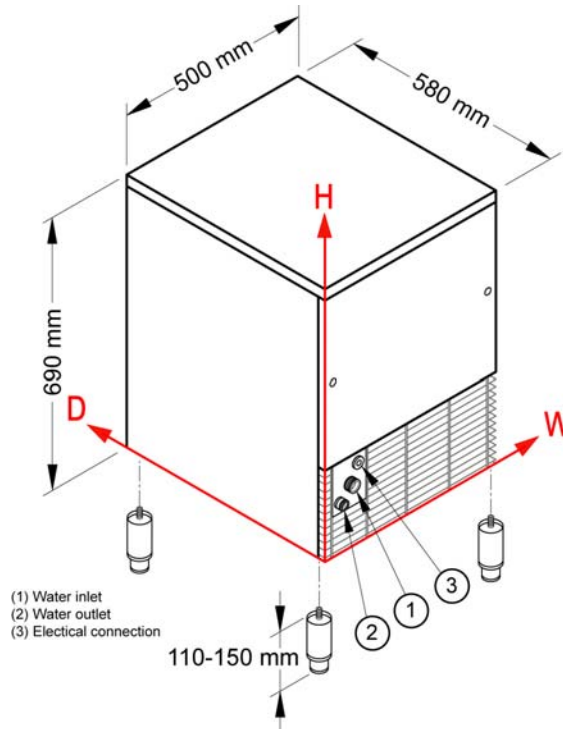

## DIMENSIONS

500W x 580D x 690\*H mm  
(\*add 110-150mm for adjustable legs)

## CONNECTIONS

3/4" Water inlet, 24mm Water outlet  
& Electrical connection

## TECHNICAL DATA

Production 24h	42 kg
Storage Capacity	16 kg
Cooling System	Air
Cube	13 g
Refrigerant	R404A
Electrical Consumption	450W
Power Requirements	240V 10amp
Weight	52 kg

## STANDARD ACCESSORIES

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- Adjustable stainless steel legs (4)

## CONNECTIONS

	W	H
Water inlet	111 mm	196 mm
Water outlet	49 mm	151 mm
Electrical connection	156 mm	232 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



www.comcater.com.au

PROUDLY DISTRIBUTED BY: