

BREMA CB840A

SELF-CONTAINED ICE CUBE MACHINE

Brema's flagship CB range offers self-contained ice machines for bench top, under bench or free-standing installation. These machines produce attractive, crystalline cubes weighing 13g which rapidly chill and enhance the appearance of any beverage.

The Brema CB840A is a free-standing ice cube machine that produces 80kg of ice per 24 hours and has storage capacity of 40kg.


The CB range of self-contained ice cube machines is the perfect fit for cafes, restaurants, hotels, bars and nightclubs.



STANDARD FEATURES

- 80kg production per 24 hours
- 40kg storage capacity
- Produces crystalline 13g cubes
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Fully insulated internal storage bin
- Disappearing door
- Electromechanical operation
- Stainless steel spray arm

13g Cubes



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

from the world of Comcater!

National Head Office
156 Swann Drive
Derrimut VIC 3030
Tel: +61 3 8369 4600
Fax: +61 3 8369 4695


Melbourne
96-100 Tope Street
South Melbourne VIC 3205
Tel: +61 3 8369 4600
Fax: +61 3 8699 1299

Sydney
20/4 Avenue of the Americas
Newington, NSW 2127
Tel: +61 2 9748 3000
Fax: +61 2 9648 4762

Brisbane
1/62 Borthwick Avenue
Murarrie QLD 4172
Tel: +61 7 3399 3122
Fax: +61 7 3399 5311

Perth
Unit 4/35 Westchester Road
Malaga WA 6090
Tel: +61 8 9248 9290
Fax: +61 8 9248 1903

BREMA CB840A

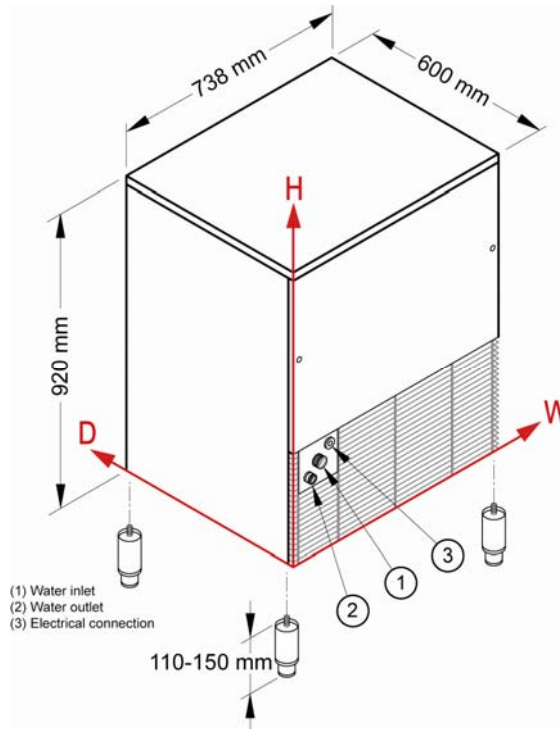

DIMENSIONS

738W x 600D x 920*H mm
 (*add 110-150mm for adjustable legs)

CONNECTIONS

3/4" Water inlet, 24mm Water outlet
 & Electrical connection

TECHNICAL DATA

Production 24h	80 kg
Storage Capacity	40 kg
Cooling System	Air
Cube	13 g
Refrigerant	R404A
Electrical Consumption	800W
Power Requirements	240V 10amp
Weight	86 kg

STANDARD ACCESSORIES

- Water inlet hose
- Drainage hose
- External water filter
- Pressure limiting valve
- Plastic ice scoop
- Adjustable stainless steel legs (4)

CONNECTIONS

	W	H
Water inlet	116 mm	285 mm
Water outlet	54 mm	240 mm
Electrical connection	161 mm	321 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



www.comcater.com.au

PROUDLY DISTRIBUTED BY: