




CC100

Performance and efficiency



CC100

CONTI
ESPRESSO MACHINE

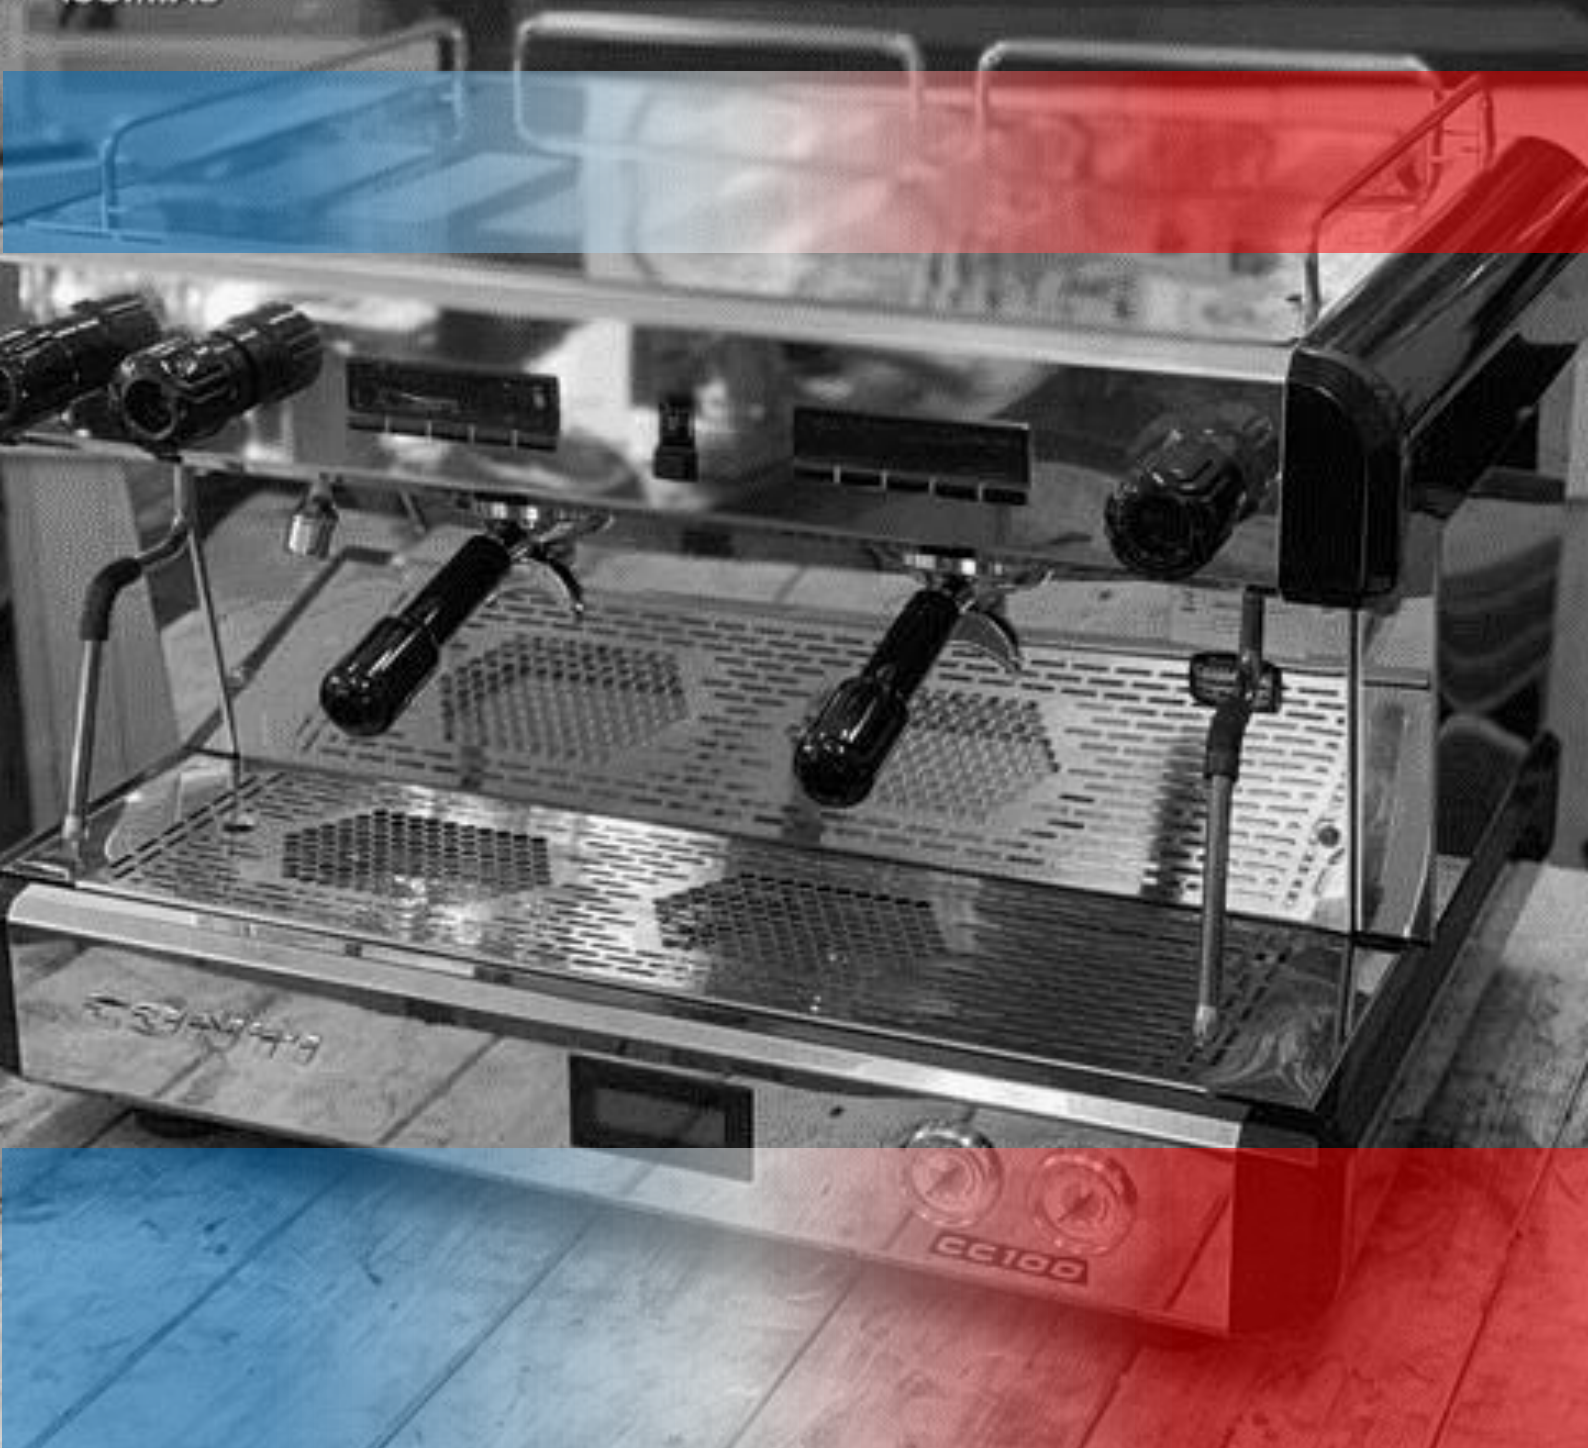

New CC100, in standard range (except compact), will come in 3 models: 1,2 and 3 groups in Tall Cup (TC) only. On top of the standard range, you will now find the COMPACT version only available in 2 groups Tall Cup (TC).

Efficient to produce high quality drinks, reliable to increase life time of the machine at competitive costs. New CC100 is the ideal partner for your coffee business.

Simplicity and flexibility equal incredible performance



All colours are available in 1, 2 and 3 group



PID

Boiler temperature controlled via PID, which not only maintains fantastic thermal stability for consistent espresso taste but also allows temperature to be adjusted easily to perfectly match the coffee profile/ type.



Pre-Infusion

Pre-Infusion setting to increase extraction consistency and help iron out user error during the dosing and tamping stage.



Eco Mode

Drops the boiler temperature to 60°C when not in use, reducing power consumption and saving money – with the added bonus of reaching working temperature faster, for service.



Auto Clean

Cleaning cycle – ensures machine is kept clean for optimum - tasting drinks and increased intervals between servicing.



Tall Cup

No extra cost on all models – making serving a larger take away cup or tall glass simple and efficient



Compact

Our latest configuration features a perfectly compact design with 2 Groups, 2 steam arms, a 7-litre boiler plus PID – this is a real bench mark machine and a great solution for many outlets.

Tall cup machine

Available

Multiple configurations

2 Group Compact, 2 Group or 3 Group.

Attractive design

Full stainless-steel construction, including optional colour side panels in red, white or black.

PID temperature control

This allows the user to adjust water temperature to perfectly complement their coffee.

Great temperature stability

Through Thermal Siphon system – utilises fresh water for each shot.

Optional display

Feature to assist in fault diagnosis, service and filter change intervals.

Pre-infusion

One espresso and double espresso buttons – this ensures consistent extraction and helps 'smooth out' poor tamping.

Auto GRP cleaning

Function to ensure perfect performance.

Cleaning kit

Included with every machine.

Eco mode

Drops boiler temp to 60°C at the touch of two buttons – perfect for overnight or during quiet/closed periods.

Large cup warmer tray

Saves space on counter top.

Dual pressure gauges


One to measure mains and pump pressure, one for boiler pressure.

Choice of element rating

2 Group - 2850w (13amp or 3600w (20amp) and 4700W(30amp)

CC100

Performance and efficiency

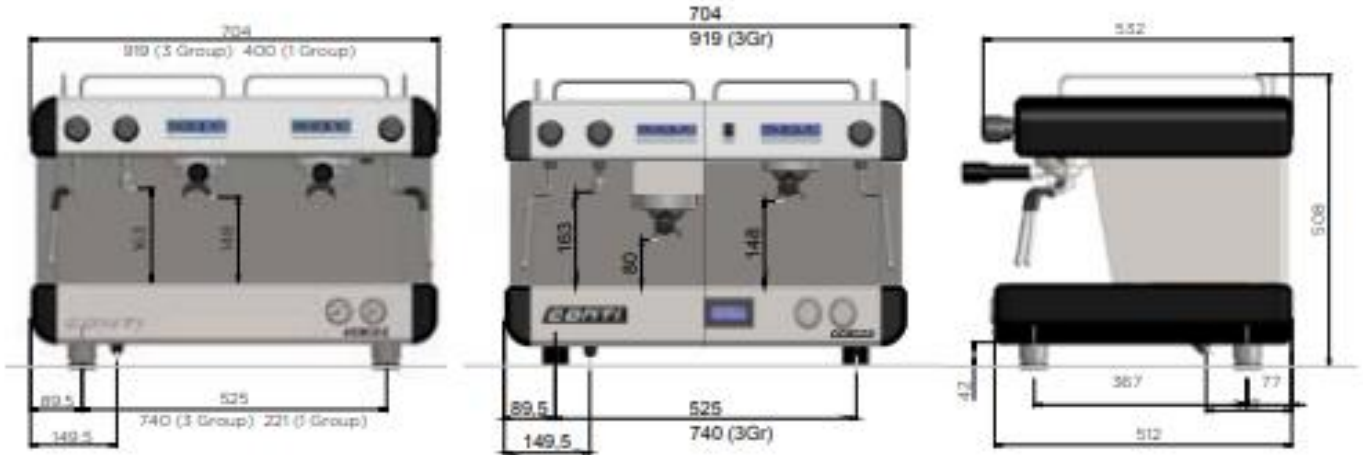

	Compact 2 Group	1 Group	2 Group	3 Group
Height (mm)	510	500	500	500
Width (mm)	524	400	704	919
Depth (mm)	512	512	512	512
Weight (kg)	51	40	58	72
Boiler Size (litres)	7	5	11	18
Voltage (V)	240	240	240	240
Power (W)	2800W	2600W	3600W	5000W



02 9756 4744
sales@boema.com.au
www.boema.com.au

BOEMA COFFEE MACHINES
 Unit 8/1 Cowpasture Pl,
 Wetherill Park NSW 2164

CONTI
 — ESPRESSO MACHINE —
BOEMA