

specifications

CL400-2SW




Counterline, 2 Door (Swing), Integral Fridge

CABINET DIMENSIONS

	External	Internal
Height	725mm*	545mm
Width	1600mm	1120mm
Depth	680mm**	565mm
Floor area	1.09m ²	
Gross volume	390L	

* Height excludes castors, legs or optional worktop

**Depth with optional worktop is 700mm

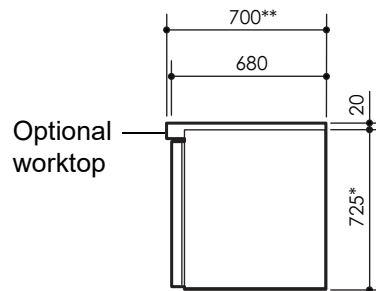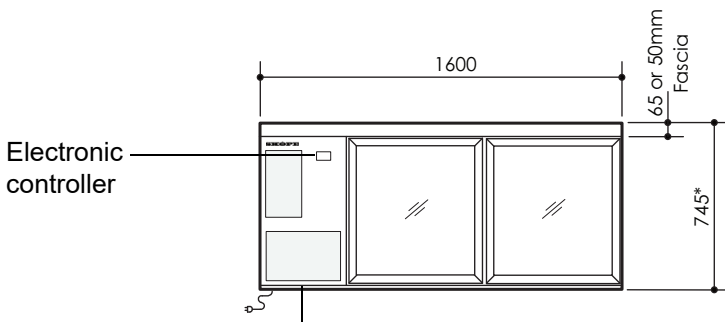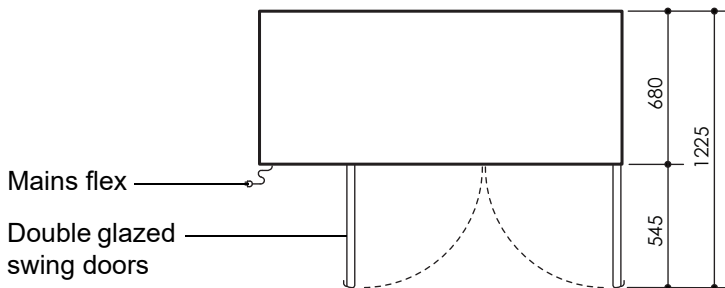

Side mounted integral refrigeration unit

CABINET SPECIFICATIONS

Doors	Self-closing, double glazed, toughened Low-E safety glass with aluminium extrusion or insulated solid doors
Internal door opening size	2 door openings: 544mm high x 520mm wide
Shelves	Adjustable height, white plastic coated, steel wire shelves - two per door
Worktop (optional)	Optional 20mm high stainless steel worktop with 65mm (or 50mm) fascia
Electrical safety climate class	5
Internal lighting	1 x 20W T8 Frosted LED Tube (Ø26 x 900mm, 5500K) - Switched
Electrical	230-240 Volts a.c. 50 Hz, single phase supply, 2.3 Amps
Temperature range	+1°C to +4°C
GEMS class	M1
GEMS energy consumption	5.65 kWh/24h
GEMS annual running cost	\$619 p.a. (@ \$0.30/kWh)
Refrigeration system	Side mounted, integral refrigeration unit (UE12AAC-173ZC)
Electronic controller	SKOPE CAREL ir33
Refrigerant	R134a / 425 g
Nominal capacity	581 Watts
Insulation	42mm polyurethane foam
Drainage	No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2003 SKOPE Industries Limited

PSS0157 Rev. 4.1 Mar. 2021



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Australian Freephone: 1800 121 535

Email: skope@skope.com Website: www.skope.com

