


Product Information

- High efficiency cooktops with heavy duty electronic components and thick, high-impact Schott Ceran glass-ceramic top, engineered for use in commercial kitchens
- Easy control via the Helios Standard interface
- Temperature range from 29°C - 218°C
- Automatic pan detection for instant energy transmission to the pan & almost no energy consumption when the pan is not present
- Microprocessor monitors vital components to check for overheating and power supply issues
- Automatic shut-off feature prohibits overheating
- Drop-in units feature Stainless steel edging, aluminium housing and control box
- Integral grease filter and air baffle to ensure cleaner and cooler air intake for optimum reliability
- **24-month parts and 12-months labour warranty**

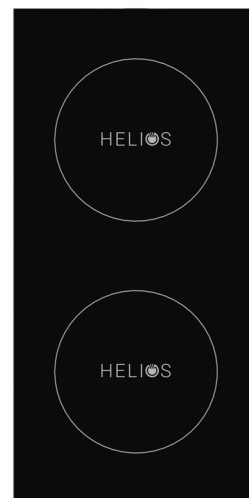

Specifications

Model	HRD.9500.FB25.4	HRD.9500.FB35.4
W x D x H (mm)	343 x 692 x 95	343 x 692 x 95
Weight	14kg	14kg
Total Connected Load	4.8kW	7kW
Electrical Connection	1Ø + N + E 240VAC / 50Hz 20A plug & lead (1.8m)	1Ø + N + E 415VAC / 50Hz Lead only (1.8m) 32A plug required
Cut Out Size (mm)	334w x 683d	334w x 683d
Shipping	584 x 813 x 279 / 19kg	584 x 813 x 279 / 19kg

Legend

A Electrical Connection

