




Self contained ice maker with in-built water drain pump.
Up to 50kg production per 24/hr of medium ice cube.
22kg storage bin.

Complete with castors, water & drain hoses + 1 ice scoop.

10 AMP power supply.

Water discharge up to 12m away & 1.2m high.

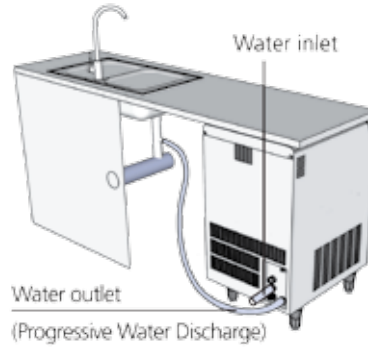

ICE PRODUCTION



Air Cooled Unit

| Air Temp. | | Water Temperature | | | |
|-----------|--|-------------------|-----------|-----------|-----------|
| | | 32° | 21° | 15° | 10° |
| °C | | 21° | 15° | 10° | |
| °F | | 70° | 60° | 50° | |
| 10° | | 47 | 49 | 50 | 52 |
| 50° | | 104 | 108 | 110 | 115 |
| 21° | | 41 | 43 | 45 | 47 |
| 70° | | 90 | 95 | 99 | 104 |
| 32° | | 33 | 35 | 37 | 39 |
| 90° | | 73 | 77 | 82 | 86 |
| 38° | | 27 | 30 | 32 | 34 |
| 100° | | 60 | 66 | 71 | 75 |

Water Cooled Unit

| Air Temp. | | Water Temperature | | | |
|-----------|--|-------------------|-----------|-----------|-----------|
| | | 32° | 21° | 15° | 10° |
| °C | | 21° | 15° | 10° | |
| °F | | 70° | 60° | 50° | |
| 10° | | 48 | 50 | 52 | 54 |
| 50° | | 106 | 110 | 115 | 119 |
| 21° | | 44 | 47 | 49 | 51 |
| 70° | | 97 | 104 | 108 | 112 |
| 32° | | 42 | 45 | 47 | 49 |
| 90° | | 93 | 99 | 104 | 108 |
| 38° | | 40 | 43 | 45 | 47 |
| 100° | | 88 | 95 | 99 | 104 |

CUBE TYPE



20g weight BRIGHT CUBE

32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL



Switch On/Off

Ice size regulation screw

BIN CAPACITY

22 kg - 48.5 lbs | 1100 pcs

DIMENSIONS

W x D x H (mm)

500 x 580 x 800/835

560 x 640 x 960

OPERATING REQUIREMENTS

Rejected Heat 1750 W

Air Volume 310 m³/h
















220-240/50/1



R134a GWP = 1430

| MIN | | MAX | |
|----------------|--|----------------|--|
| 10°C (50°F) | | 40°C (104°F) | |
| 5°C (41°F) | | 35°C (95°F) | |
| - 10 % | | + 10 % | |
| 1 Bar (14 psi) | | 5 Bar (70 psi) | |

SPECIFICATIONS

| |  cond |  comp. W |  ABS. W |  Fuse |  kWh/100kg |  L / hr |  kg |  lbs |  kg |  lbs |  Ton CO2 equiv. |
|-----------------|--|---|--|--|---|--|--|---|--|---|--|
| CS50DP A |  | 1161 | 680 | 10 | 32.4 | 4.60 | 48 | 106 | 56 | 123 | 0.50 |
| CS50DP W |  | 1161 | 630 | 10 | 20.4 | 39.7 | 48 | 106 | 56 | 123 | 0.43 |

