



The spray system produces clear and transparent ice cubes and the patented **Bright Cube** shape grants a longer lasting cube for you to enjoy your cold drinks

Self contained ice maker.

Up to 70kg production per 24/hr of medium ice cube.
42kg storage bin.


Complete with legs, water & drain hoses + 1 ice scoop.
10 AMP power supply.

291 mm drain height including legs to finished floor.




ICE PRODUCTION



Air Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		32°	21°	15°	10°
°F		90°	70°	60°	50°
10°		64	68	70	72
50°		141	150	154	159
21°		57	61	63	65
70°		126	134	139	143
32°		51	55	57	59
90°		112	121	126	130
38°		40	43	45	47
100°		88	95	99	104

Water Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C		32°	21°	15°	10°
°F		90°	70°	60°	50°
10°		62	67	68	70
50°		137	148	150	154
21°		57	62	64	66
70°		126	137	141	146
32°		51	56	58	60
90°		117	128	132	137
38°		49	53	56	57
100°		108	117	123	126

CUBE TYPE



20g weight
BRIGHT CUBE
32mm x 35mm x 37mm

The Bright Ice Cube, appreciated for its versatility, is perfect for use in ice buckets, whiskey on the rocks, cocktails and appetisers. The crystal clear appearance of the Bright Cube makes it essential when a high quality is required.

CONTROL PANEL



Switch On/Off


Ice size regulation screw


BIN CAPACITY

42 kg - 93 lbs | 2100 pcs

DIMENSIONS

W x D x H (mm)

 700 x 580 x 910/1030

 760 x 630 x 1070

OPERATING REQUIREMENTS

Rejected Heat 1968 W





Air Volume 310 m³/h
















220-240/50/1






R134a GWP = 1430


MIN		MAX	
10°C (50°F)		40°C (104°F)	
5°C (41°F)		35°C (95°F)	
- 10 %		+ 10 %	
1 Bar (14 psi)		5 Bar (70 psi)	

SPECIFICATIONS



	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO2 equiv.
CS70 A		1317	880	10	26.3	5.98	57	126	69	152	0.56
CS70 W		1317	560	10	21.1	37.8	57	126	69	152	0.53

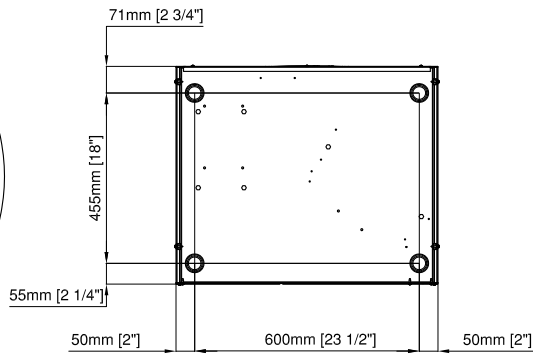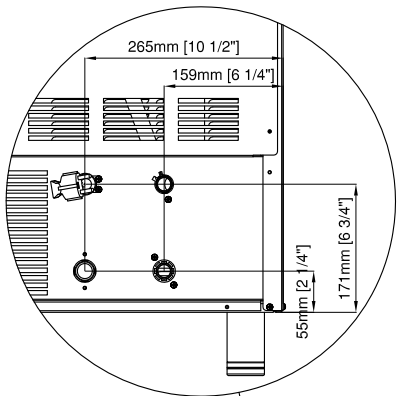

Back View
Vista Posteriore


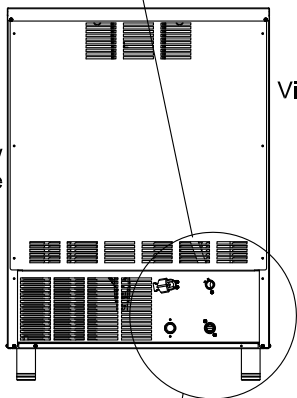


Front View
Vista Frontale

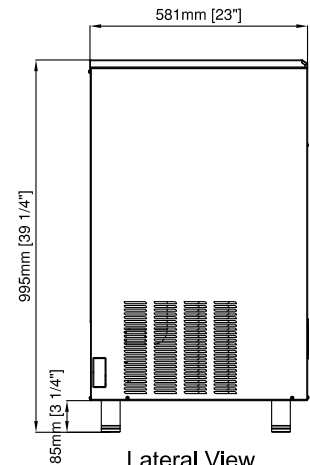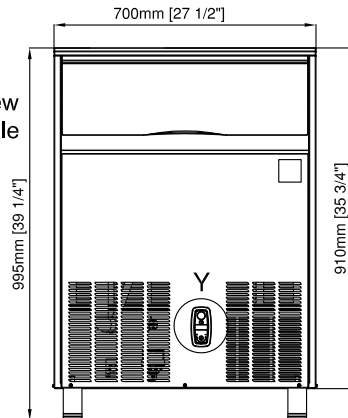

Lateral View
Vista Laterale

Top View
Vista Superiore

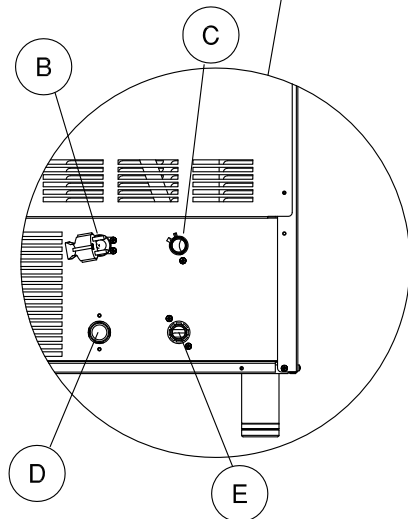

- A Switch On/Off
- B Electrical cable supply
- C Water outlet connection 20mm diam.
- D Water outlet connection water condensation 20mm diam.
- E Water inlet connection 3/4" gas
- F Ice size regulation screw