

<b>Project Name:</b> _____	<b>AIA #</b>
<b>Location:</b> _____	<b>SIS #</b>
<b>Item #:</b> _____	<b>Qty:</b> _____


**Model: AT50 GREEN full optional**

**AT50 GREEN**





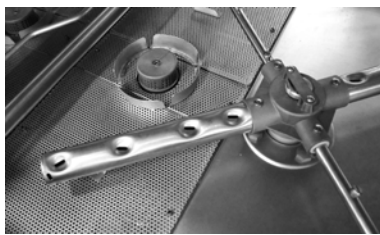


**Standard Features**







- Front loading undercounter dishwasher
- Electronic Control
- Clearance 340 mm
- Basket size 500 x 500 mm
  
- 3 washing cycles (2 - 3 - 4 min)
- Rack/h 30 - 20 - 15
- Temperature wash 85°C / rinse 60°C
- 0.75 hp wash pump
- Low water consumption 2.8 liters + 13 liters tank
  
- Simple to use
- LED waterproof buttons
- Digital display
- Thermostop sytem
- Soft start system
- Smart self auto diagnostic system
- Extra cold final rinse cycle
  
- Double insulated door & panels
- Double filtration system
- Separate double washing & rinse
- Interior / exterior AISI 304
- Reinforced door hinges
- Robust structure
- Easy access to service
  
- Inox stainless steel wash arms
- Detergent peristaltic pump
- Rinse aid peristaltic pump
- Automatic self cleaning drain pump
- Soft door opening



**Optionals and Accessories**

- Rinse pressure pump

    	Approvals:	Available at:
---	------------	---------------

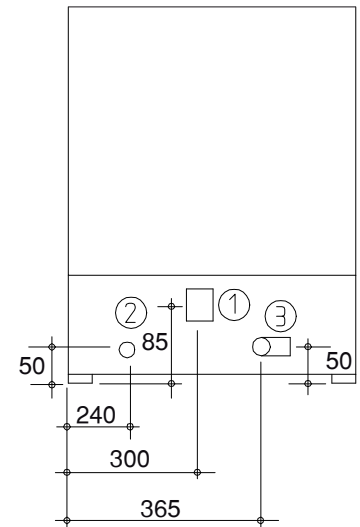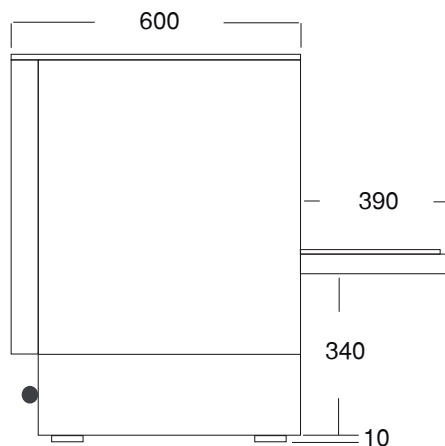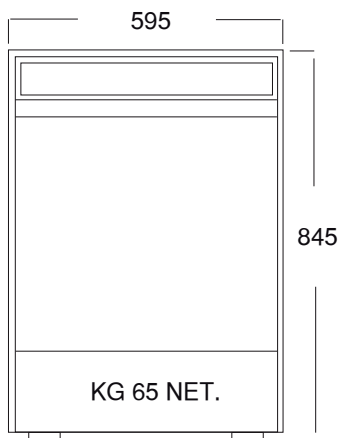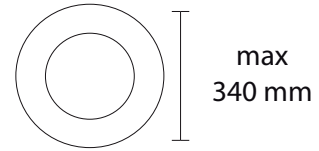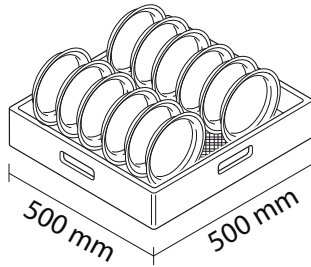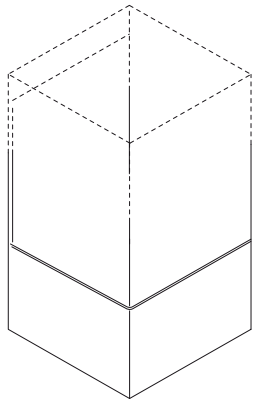

**TECHNICAL SPECIFICATION**

\*measures expressed in mm

<b>Model/Modello</b>	AT50 GREEN
<b>Interface Type/Interfaccia</b>	Electronic
<b>Clearance/Passaggio Utile</b>	340 mm
<b>Cycle/Ciclo</b>	2 - 3 - 4 min
<b>Rinse Aid Dispenser/Dosatore Brillatante</b>	✓
<b>Detergent Dispenser/Dosatore Detergente</b>	✓
<b>Drain Pump/Pompa Scarico</b>	✓
<b>Thermostop System/Sistema Thermostop</b>	✓
<b>Soft Start Cycle/Partenza Soft Ciclo</b>	✓
<b>Temperature Display/Display Temperatura</b>	✓
<b>Smart Self Diagnostics/Diagnostica Smart</b>	✓
<b>Tank Capacity/Capacità Vasca</b>	24 lt.
<b>Boiler Capacity/Capacità Boiler</b>	7 lt.
<b>Tank Heater/Resistenza Vasca</b>	2,8 kW
<b>Boiler Heater/Resistenza Boiler</b>	2,8 kW - 6kW
<b>Power Supply/Alimentazione Elettrica</b>	230V/1N - 400V/3N
<b>Washing Pump/Pompa Lavaggio</b>	0,55 kW/0.75hp
<b>Max. Power Rating/Assorbimento Max.</b>	15 Amp/3,4 kW 230V/1N 9.6 Amp/6,6 kW 400V/3N
<b>Inlet Pressure/Pressione di Alimentazione</b>	2 ÷ 4 bar
<b>Weight/Peso</b>	65 Kg
<b>Water Consumption/Consumo Acqua</b>	2,8 lt./cycle**
<b>Standard Equipment/Dotazione Standard</b>	2 Racks (Univ+Plate) 1 Cutlery Cont.
<b>Hour Production/Produzione Oraria</b>	30 - 20 - 15 racks/h* 540 - 360 - 270 plates/h*

- ① ELECTRICAL CONNECTION
- ② WATER CONNECTION
- ③ WATER DRAIN



\* 55°C inlet water temp. ✓ included/incluso n/a not available  
 \*\* 2 bars inlet water pressure. • optional