



Item# \_\_\_\_\_

Job \_\_\_\_\_



## SUPER ERECTA SHELF® WIRE SHELVING

- **Unique Design:** The open wire design of these heavy-gauge carbon-steel or stainless steel shelves minimizes dust accumulation and allows a free circulation of air, greater visibility of stored items and greater light penetration.
- **Versatile Construction:** Super Erecta Shelf® wire shelving can change as quickly as your needs change. By using various accessories, hundreds of shelving configurations become possible.
- **Fast, Secure Assembly:** SiteSelect™ Posts with the triple-groove visual guide feature, have circular grooves at 1" (25mm) intervals and are numbered at 2" (50mm) intervals. A patented, tapered split sleeve (plastic or aluminum) snaps together around each post. Tapered openings in the shelf corners slide over the tapered split sleeves providing a positive lock. Shelf is assembled in minutes without the use of any special tools.
- **Shelf Ribs:** Run front to back, allowing you to slide items on and off shelves smoothly.
- **Shelf Accessibility:** Shelves can be loaded/unloaded easily from all sides. This open construction allows use of maximum storage space of cube.
- **Adjustability:** Shelves can be adjusted at 1" (25mm) intervals along the entire length of the post.
- **Durable:** Super Erecta Shelf® wire shelving is available in four options: Super Erecta Brite™, chrome-plated, stainless steel and Metroseal™.
- **Adjustable Feet:** Bolt levelers compensate for surface irregularities.




Job \_\_\_\_\_



**SUPER ERECTA SHELF®  
WIRE SHELVING**

**WIRE SHELVES**

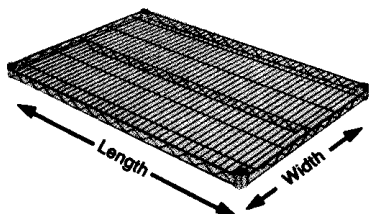

**Split Sleeves**

**SUPER ERECTA SHELF** meets U.S. Government Specifications MIL-S-40144E.

**PLATED SHELVING** has clear protective coating.

For load capacity guidelines, ask your InterMetro representative for a copy of "Helpful Hints."

	Width		Length		Approx. Pkd. Wt.		Cat. No. Super Erecta Brite	Cat. No. Chrome	Cat. No. Stainless
	(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)			
14	355	24	610	6	2.7	1424BR	1424NC	1424NS	
14	355	30	760	7	3.2	1430BR	1430NC	1430NS	
14	355	36	910	8	3.6	1436BR	1436NC	1436NS	
14	355	42	1060	9½	4.3	1442BR	1442NC	1442NS	
14	355	48	1220	10½	4.7	1448BR	1448NC	1448NS	
14	355	60	1525	14	6.3	1460BR	1460NC	1460NS	
14	355	72	1825	17	7.7	1472BR	1472NC	1472NS	
18	455	24	610	7	3.2	1824BR	1824NC	1824NS	
18	455	30	760	8	3.6	1830BR	1830NC	1830NS	
18	455	36	910	9½	4.3	1836BR	1836NC	1836NS	
18	455	42	1060	11	5.0	1842BR	1842NC	1842NS	
18	455	48	1220	12	5.4	1848BR	1848NC	1848NS	
18	455	54	1370	14½	6.6	1854BR	1854NC	1854NS	
18	455	60	1525	17	7.7	1860BR	1860NC	1860NS	
18	455	72	1825	20	9.1	1872BR	1872NC	1872NS	
21	530	24	610	8	3.6	2124BR	2124NC	2124NS	
21	530	30	760	9	4.1	2130BR	2130NC	2130NS	
21	530	36	910	11	5.0	2136BR	2136NC	2136NS	
21	530	42	1060	12	5.4	2142BR	2142NC	2142NS	
21	530	48	1220	14	6.4	2148BR	2148NC	2148NS	
21	530	54	1370	16	7.6	2154BR	2154NC	2154NS	
21	530	60	1525	18	8.2	2160BR	2160NC	2160NS	
21	530	72	1825	24	10.9	2172BR	2172NC	2172NS	
24	610	24	610	9	4.1	2424BR	2424NC	2424NS	
24	610	30	760	11	5.0	2430BR	2430NC	2430NS	
24	610	36	910	13	5.9	2436BR	2436NC	2436NS	
24	610	42	1060	15	6.8	2442BR	2442NC	2442NS	
24	610	48	1220	16	7.3	2448BR	2448NC	2448NS	
24	610	54	1370	18	8.6	2454BR	2454NC	2454NS	
24	610	60	1525	21	9.5	2460BR	2460NC	2460NS	
24	610	72	1825	26	11.8	2472BR	2472NC	2472NS	

**NOTE:** For Metroseal shelving information see sheet No. 10.10.

**"S" Hooks**

Used to "add-on" shelving units with only two posts required.  
**Cat. No. 9995Z**




**SiteSelect™ Posts**

Height*	Approx. Pkd. Wt.	Cat. No. Plated	Cat. No. Stainless		
				(in.)	(mm)
7 <sup>5</sup> / <sub>8</sub>	190	1/2	0.2	7P	
14 <sup>1</sup> / <sub>2</sub>	368	1	0.5	13P	13PS
28 <sup>1</sup> / <sub>2</sub>	724	1¾	0.75	27P	27PS
34 <sup>1</sup> / <sub>2</sub>	876	2	0.9	33P	33PS
54 <sup>9</sup> / <sub>16</sub>	1386	3	1.4	54P	54PS
62 <sup>9</sup> / <sub>16</sub>	1589	3½	1.6	63P	63PS
74 <sup>5</sup> / <sub>8</sub>	1895	4	1.8	74P	74PS
86 <sup>5</sup> / <sub>8</sub>	2200	5	2.3	86P	86PS

\*Height includes leveling bolt and cap.

SiteSelect™ Posts are grooved at 1" (25mm) increments and numbered at 2" (50mm) increments. Posts are triple-grooved every 8" (203mm) for easy identification.



**Important:** When ordering by components remember that stability decreases as the ratio of height to width increases. Units should be kept as wide and low as possible. With 14" shelving, foot plates should be used and secured to the floor on free-standing units; on mobile units, maximum post height is 54".

**Manufactured by:**  
**InterMetro Industries Corp.**  
North Washington Street  
Wilkes-Barre, PA 18705

Phone 717-825-2741  
FAX 717-825-2852  
For Product Information, call 1-800-433-2232  
For Customer Service, call 1-800-992-1776



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
www.metro.com

L02-006  
Rev. 3/98 BJ  
Printed in U.S.A.  
Information and specifications are subject to change without notice. Please confirm at time of order.