

Exquisite

PRODUCT CATALOGUE 2022



NEW GAS

R290
600A

ECO FRIENDLY

* for selected models



* for selected models

Company Overview

Exquisite Marketing Australia Pty. Ltd. was established in 2004 as an importer and distributor of commercial refrigeration products. At Exquisite Marketing Australia we have a strong team environment and provide all our clients with a reliable and highly valued service.

Since the start of our business, our company has grown each year, thanks to support from our customers for our quality products and services. We now have a commercial refrigeration range that fit whole commercial kitchen needs, display refrigeration for your store, medical refrigeration range as well as other refrigeration products.

Our objective is to provide our clients with high quality equipment that performs exceptionally well in diverse climate supported by reliable service network throughout the Australia. Exquisite Marketing Australia pride ourselves on providing trustworthy services, delivered by our dedicated staff who have the experience and skills to advise you on all your refrigeration requirements.

Along with our company commitment towards environmentally friendly and sustainable direction, we introduced new gas on our product range. We are using R290 and R600a gas, ozone friendly with better thermodynamic qualities that translates into lower energy consumption for lower running cost. We have converted most of our product range with new gas in support to more sustainable future to our planet.

Exquisite

Exquisite Marketing Australia Pty. Ltd.
Unit 5, 6 Garden Road
Clayton VIC 3168 Australia

P +61 3 9561 1595, 9561 1695
F +61 3 9561 1690
E sales@exquisiteaust.com.au
W www.exquisiteaust.com.au

Contents

Commercial Kitchen



Underbench storage refrigerators and freezers	5-11
Upright storage refrigerators and freezers	12-16
Food preparation refrigerators	17-18
Counter top food preparation refrigerators	19
Storage chest freezers - stainless steel top	20

Display Cabinets



Counter top display refrigerators	23
Upright display refrigerators	24-25
Supermarket display refrigerators	26
Supermarket display refrigerators	27
Backbar display refrigerators	28-31
Cake display refrigerators	32-35
Counter top cake display refrigerators	36-37
Ambient cake display	38-39

Display Freezers



Upright display freezers	41
Ice cream scooping freezers	42-43
Flat glass display freezers	44
Curved glass display freezers	45

Supermarket Island Freezers



Supermarket Island freezers	47
-----------------------------	----

Vaccine Refrigerators



Vaccine refrigerators	49-50
-----------------------	-------

Commercial Kitchen





Underbench Storage Refrigerators with Solid Door

Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN1/1
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



USC260H





Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 314 L
Exterior dimensions in mm: 1360w x 700d x 830h
Number of adjustable shelves: 2

Temperature set range: -2°C to +8°C
Gross/net weight: 119/102 kg
Energy consumption in 24h: 2.2 kWh

\$3,400.00+GST

USC400H





Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 465 L
Exterior dimensions in mm: 1795w x 700d x 830h
Number of adjustable shelves: 3

Temperature set range: -2°C to +8°C
Gross/net weight: 140/121 kg
Energy consumption in 24h: 3.1 kWh

\$4,000.00+GST

USC550H

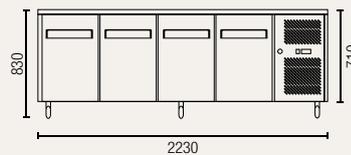

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 616 L
Exterior dimensions in mm: 2230w x 700d x 830h
Number of adjustable shelves: 4

Temperature set range: -2°C to +8°C
Gross/net weight: 170/150 kg
Energy consumption in 24h: 4.7 kWh

\$4,650.00+GST



Underbench Storage Refrigerators with Solid Door - Slimline

Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



SSC260H



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 260 L

Exterior dimensions in mm: 1360w x 600d x 830h

Number of adjustable shelves: 2



Temperature set range: -2°C to +8°C

Gross/net weight: 92/83 kg

Energy consumption in 24h: 2.2 kWh

\$3,350.00+GST

SSC400H



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 386 L

Exterior dimensions in mm: 1795w x 600d x 830h

Number of adjustable shelves: 3



Temperature set range: -2°C to +8°C

Gross/net weight: 130/105 kg

Energy consumption in 24h: 3.1 kWh

\$3,950.00+GST

SSC550H



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 511 L

Exterior dimensions in mm: 2230w x 600d x 830h

Number of adjustable shelves: 4

Temperature set range: -2°C to +8°C

Gross/net weight: 156/121 kg

Energy consumption in 24h: 4.7 kWh

\$4,600.00+GST

Underbench Storage Refrigerators with Glass Door

Features:



- Self closing glass doors with handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Continuous shelf for maximum use of space
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



USC260G



Continuous shelf for maximum use of space



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 314 L

Exterior dimensions in mm: 1360w x 700d x 830h

Number of adjustable shelves: 2



Temperature set range: -2°C to +8°C

Gross/net weight: 125/108 kg

Energy consumption in 24h: 2.2 kWh

\$3,500.00+GST

USC400G



Continuous shelf for maximum use of space

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 465 L

Exterior dimensions in mm: 1795w x 700d x 830h

Number of adjustable shelves: 3



Temperature set range: -2°C to +8°C

Gross/net weight: 153/134 kg

Energy consumption in 24h: 3.1 kWh

\$4,200.00+GST

USC550G



Continuous shelf for maximum use of space

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 616 L

Exterior dimensions in mm: 2230w x 700d x 830h

Number of adjustable shelves: 4

Temperature set range: -2°C to +8°C

Gross/net weight: 177/158 kg

Energy consumption in 24h: 4.7 kWh

\$4,850.00+GST

Underbench Storage Refrigerators with Glass Door - Slimline

Features:



- Self closing glass doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Continuous shelf for maximum use of space
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



SSC260G



Continuous shelf for maximum use of space



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 260 L

Exterior dimensions in mm: 1360w x 600d x 830h

Number of adjustable shelves: 2



Temperature set range: -2°C to +8°C

Gross/net weight: 120/103 kg

Energy consumption in 24h: 2.2 kWh

\$3,450.00+GST

SSC400G



Continuous shelf for maximum use of space



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 386 L

Exterior dimensions in mm: 1795w x 600d x 830h

Number of adjustable shelves: 3



Temperature set range: -2°C to +8°C

Gross/net weight: 148/129 kg

Energy consumption in 24h: 3.1 kWh

\$4,150.00+GST

SSC550G



Continuous shelf for maximum use of space



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 511 L

Exterior dimensions in mm: 2230w x 600d x 830h

Number of adjustable shelves: 4

Temperature set range: -2°C to +8°C

Gross/net weight: 172/153 kg

Energy consumption in 24h: 4.7 kWh

\$4,800.00+GST



Underbench Storage Freezers with Solid Door

Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN1/1
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



USF260H





Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 314 L
Exterior dimensions in mm: 1360w x 700d x 830h
Number of adjustable shelves: 2

Temperature set range: -18°C to -22°C
Gross/net weight: 124/107 kg
Energy consumption in 24h: 7.8 kWh

\$4,200.00+GST

USF400H



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 465 L
Exterior dimensions in mm: 1795w x 700d x 830h
Number of adjustable shelves: 3

Temperature set range: -18°C to -22°C
Gross/net weight: 165/146 kg
Energy consumption in 24h: 8.2 kWh

\$4,900.00+GST



Underbench Storage Freezers with Solid Door - Slimline

Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Stainless steel finish exterior and interior
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Lockable engine compartment
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures +16°C to +43°C



SSF260H



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 260 L

Exterior dimensions in mm: 1360w x 600d x 830h

Number of adjustable shelves: 2



Temperature set range: -18°C to -22°C

Gross/net weight: 124/107 kg

Energy consumption in 24h: 7.8 kWh

\$4,150.00+GST

SSF400H



Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 386 L

Exterior dimensions in mm: 1795w x 600d x 830h

Number of adjustable shelves: 3

Temperature set range: -18°C to -22°C

Gross/net weight: 165/146 kg

Energy consumption in 24h: 9.2 kWh

\$4,850.00+GST


Single Door Underbench Storage Refrigerators and Freezers

Features:

- Lockable door with handles
- Digital controller and digital temperature display
- Adjustable feet
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel shelves
- Refrigerant: R134a
- Ambient temperatures +16°C to +32°C



MC200H

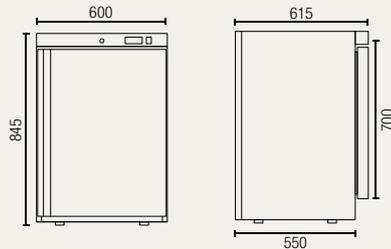


Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 140 L
Exterior dimensions in mm: 600w x 615d x 845h
Number of adjustable shelves: 3
Cooling system: static, fan assisted
Defrost system: manual

Temperature set range: 0°C to +10°C
Gross/net weight: 55/45 kg
Door material: stainless steel
Energy consumption in 24h: 2 kWh

\$1,550.00+GST

MC200G

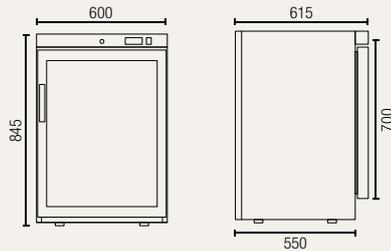

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 140 L
Exterior dimensions in mm: 600w x 615d x 845h
Number of adjustable shelves: 3
Cooling system: static, fan assisted
Defrost system: manual

Temperature set range: 0°C to +10°C
Gross/net weight: 55/45 kg
Door material: glass
Energy consumption in 24h: 2 kWh

\$1,650.00+GST


MF200H



Fixed top evaporator shelf with railing guard



Sliding drawers for middle and bottom shelf

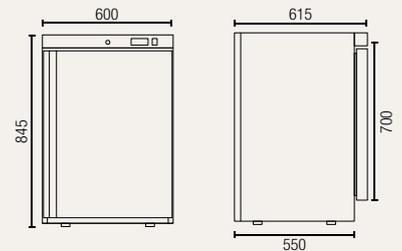

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 140 L
Exterior dimensions in mm: 600w x 615d x 845h
Fixed shelves: 1 + 2 sliding drawers
Cooling system: static
Defrost system: manual

Temperature set range: -10°C to -22°C
Gross/net weight: 55/45 kg
Door material: stainless steel
Energy consumption in 24h: 3 kWh

\$1,650.00+GST


Upright Storage Refrigerators with Solid Door

Features:

- Lockable self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C



GSC650H

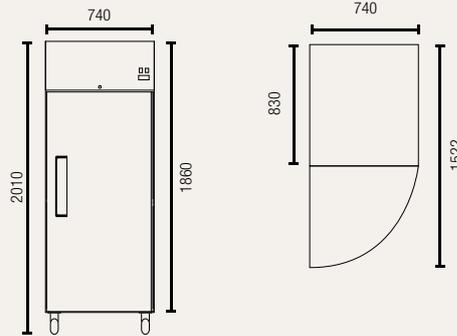

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 685 L

Exterior dimensions in mm: 740w x 830d x 2010h

Number of adjustable shelves: 3


Temperature set range: -2°C to +8°C

Gross/net weight: 136/121 kg

Energy consumption in 24h: 2.78 kWh

\$3,500.00+GST

GSC1410H

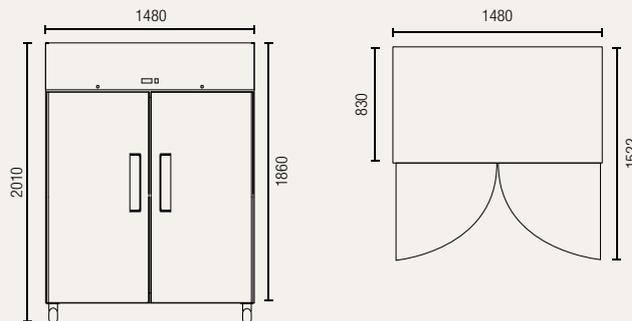

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 1476 L

Exterior dimensions in mm: 1480w x 830d x 2010h

Number of adjustable shelves: 6

Temperature set range: -2°C to +8°C

Gross/net weight: 213/188 kg

Energy consumption in 24h: 4.15 kWh

\$5,400.00+GST


Upright Storage Refrigerators with Split Solid Door

Features:

- Lockable self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C



GSC652H

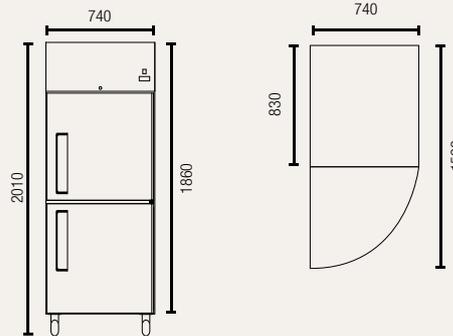


Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 685 L
Exterior dimensions in mm: 740w x 830d x 2010h
Number of adjustable shelves: 3

Temperature set range: -2°C to +8°C
Gross/net weight: 136/121 kg
Energy consumption in 24h: 3.1 kWh

\$3,600.00+GST

GSC1412H

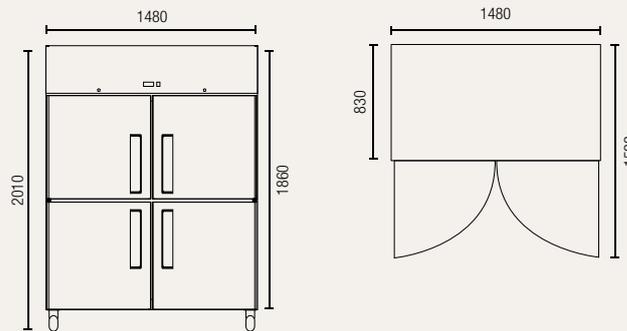

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 1476 L
Exterior dimensions in mm: 1480w x 830d x 2010h
Number of adjustable shelves: 6

Temperature set range: -2°C to +8°C
Gross/net weight: 213/188 kg
Energy consumption in 24h: 4.3 kWh

\$5,500.00+GST


Upright Storage Refrigerators with Glass Door

Features:

- Lockable self closing glass doors with handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronom pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C



GSC650G

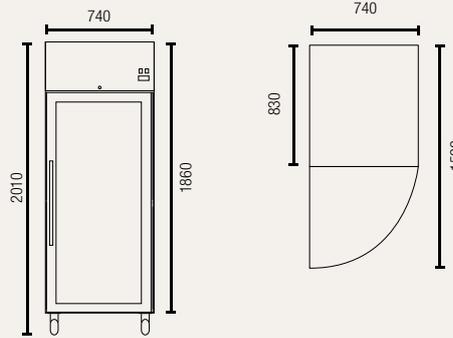

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 685 L

Exterior dimensions in mm: 740w x 830d x 2010h

Number of adjustable shelves: 3

Temperature set range: -2°C to +8°C

Gross/net weight: 147/132 kg


Energy consumption in 24h: 3.1 kWh

\$3,700.00+GST

GSC1410G



Bridge between shelves for maximum use of space

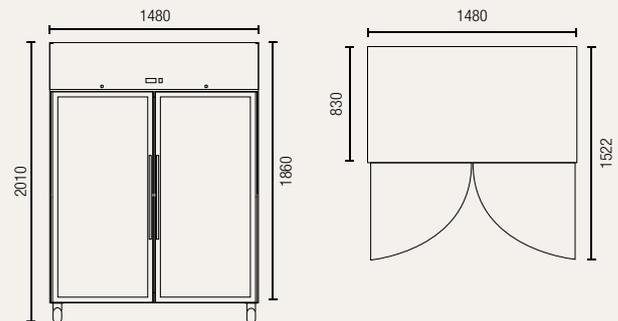

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 1476 L

Exterior dimensions in mm: 1480w x 830d x 2010h

Number of adjustable shelves: 6

Temperature set range: -2°C to +8°C

Gross/net weight: 233/208 kg

Energy consumption in 24h: 4.3 kWh

\$5,600.00+GST


Upright Storage Freezers with Solid Door

Features:

- Lockable self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C



GSF650H

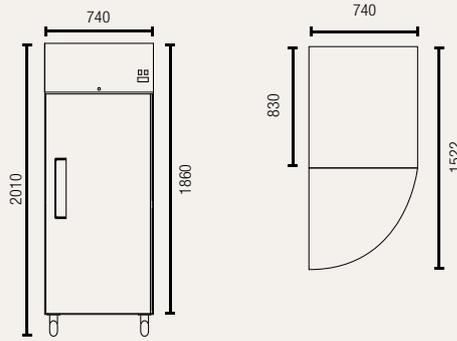


Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 685 L
Exterior dimensions in mm: 740w x 830d x 2010h
Number of adjustable shelves: 3

Temperature set range: -18°C to -22°C
Gross/net weight: 141/126 kg
Energy consumption in 24h: 6.44 kWh

\$4,100.00+GST

GSF1410H

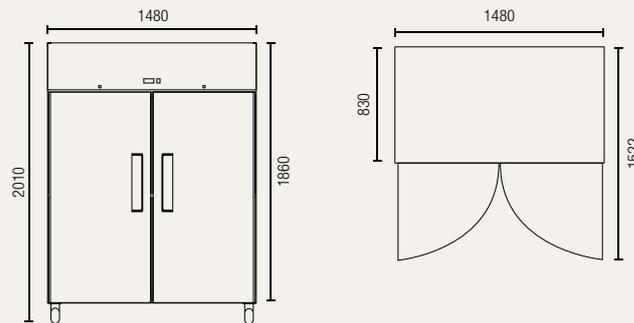

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 1476 L
Exterior dimensions in mm: 1480w x 830d x 2010h
Number of adjustable shelves: 6

Temperature set range: -18°C to -22°C
Gross/net weight: 226/201 kg
Energy consumption in 24h: 10 kWh

\$6,000.00+GST



Upright Storage Freezers with Split Solid Door

Features:

- Lockable self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Shelf to fit gastronorm pan size GN2/1
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C



GSF652H

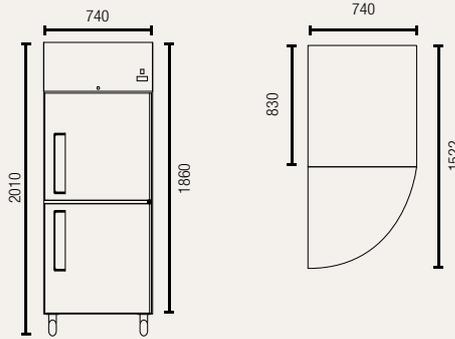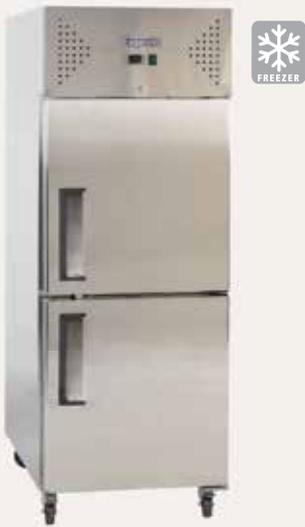

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 685 L

Exterior dimensions in mm: 740w x 830d x 2010h

Number of adjustable shelves: 3


Temperature set range: -18°C to -22°C

Gross/net weight: 141/126 kg

Energy consumption in 24h: 6.7 kWh

\$4,250.00+GST

GSF1412H

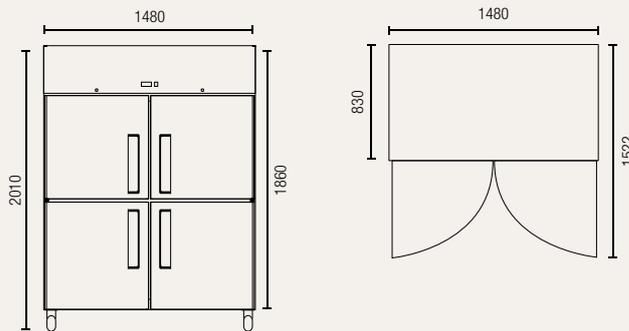

Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 1476 L

Exterior dimensions in mm: 1480w x 830d x 2010h

Number of adjustable shelves: 6

Temperature set range: -18°C to -22°C

Gross/net weight: 226/201 kg

Energy consumption in 24h: 10.5 kWh

\$6,150.00+GST

Food Preparation Refrigerators

Features:

- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Under bench shelf to fit gastronorm pan size GN1/1
- Frequency/voltage: 50Hz/220-240 V

- Plastic coated steel shelves
- Refrigerant: R290
- Lockable castor wheels
- Ambient temperatures from +16°C to +43°C




MTC263H



* catering tubs and tub-lids not included

Allow min. 100mm clearance for installation, all vents must be left clear

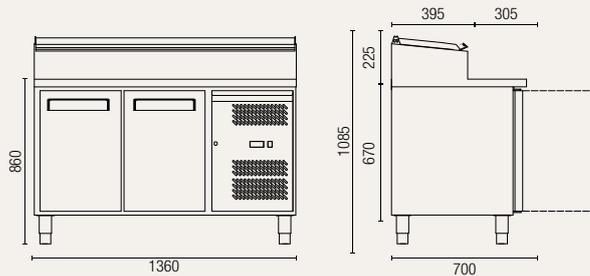

Gross volume: 282 L
Exterior dimensions in mm: 1360w x 700d x 1085h
Number of adjustable shelves: 2
Gastronorm pan size (top): 7 x GN1/3

Temperature set range: +2°C to +8°C
Gross/net weight: 131/104 kg
Preparation area material: stainless steel
Energy consumption in 24h: 3.4 kWh


\$5,300.00+GST

MTC363H



* catering tubs and tub-lids not included

Allow min. 100mm clearance for installation, all vents must be left clear

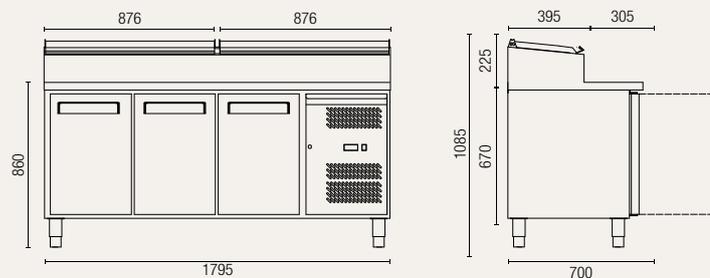

Gross volume: 417 L
Exterior dimensions in mm: 1795w x 700d x 1085h
Number of adjustable shelves: 3
Gastronorm pan size (top): 8 x GN1/3

Temperature set range: -2°C to +8°C
Gross/net weight: 161/130 kg
Preparation area material: stainless steel
Energy consumption in 24h: 4.35 kWh

\$5,500.00+GST

Food Preparation Refrigerators

Features:


- Self closing stainless steel doors with integrated handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Stainless steel finish exterior and interior
- Plastic coated steel shelves
- Refrigerant: R290
- Castor wheels
- Ambient temperatures from +16°C to +38°C



ICC260H



Plastic catering tubs included

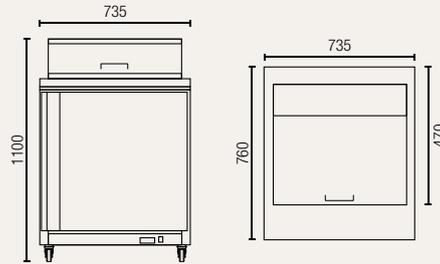

⚠ Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 251 L

Exterior dimensions in mm: 735w x 760d x 1100h

Number of adjustable shelves: 1

Temperature set range: -2°C to +8°C

Gross/net weight: 116/85 kg


Gastronorm pan size (top): 8 x GN1/6

\$3,500.00+GST

ICC400H



Plastic catering tubs included

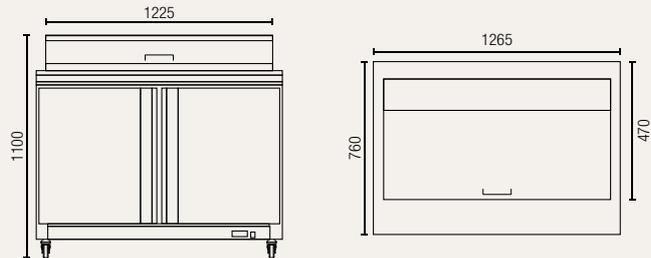

⚠ Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 406 L

Exterior dimensions in mm: 1265w x 760d x 1100h

Number of adjustable shelves: 2

Temperature set range: -2°C to +8°C

Gross/net weight: 179/123 kg


Gastronorm pan size (top): 12 x GN1/6

\$5,500.00+GST

ICC550H



Plastic catering tubs included

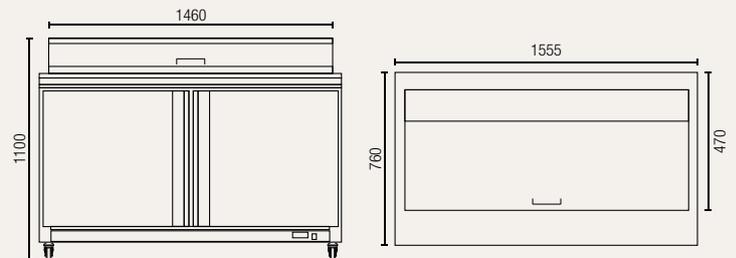

⚠ Allow min. 100mm clearance for installation, all vents must be left clear

Gross volume: 527 L

Exterior dimensions in mm: 1555w x 760d x 1100h

Number of adjustable shelves: 2

Temperature set range: -2°C to +8°C

Gross/net weight: 205/145 kg

Gastronorm pan size (top): 16 x GN1/6

\$6,000.00+GST

Counter Top Food Preparation Refrigerators

Features:

- Dynamic fan forced cooling system with automatic defrosting
- Digital controller and digital temperature display
- Frequency/voltage: 50Hz/220-240 V
- Stainless steel and glass top cabinet finish
- To fit 150mm high GN pans
- Refrigerant: R600a
- Ambient temperatures from +16°C to +32°C



ICT1200



* catering tubs and tub-lids not included

Exterior dimensions in mm: 1200w x 395d x 450h

Gross/net weight: 60/40.5 kg


Number of GN pans: 3 x GN1/3 + 1 x GN1/2

Temperature set range: +2°C to +10°C

Energy consumption in 24h: 1.12 kWh

\$1,200.00+GST

ICT1500

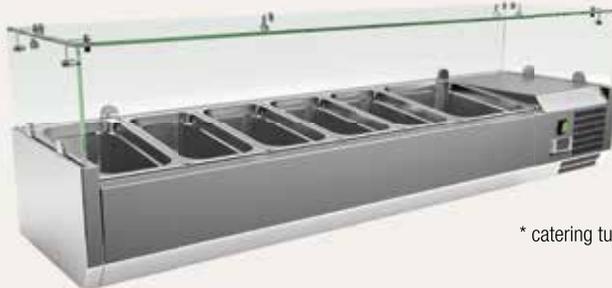

* catering tubs and tub-lids not included

Exterior dimensions in mm: 1500w x 395d x 450h

Gross/net weight: 72/48 kg

Number of GN pans: 5 x GN1/3 + 1 x GN1/2

Temperature set range: +2°C to +10°C

Energy consumption in 24h: 1.2 kWh

\$1,400.00+GST

ICT1800



* catering tubs and tub-lids not included

Exterior dimensions in mm: 1800w x 395d x 450h

Gross/net weight: 76/50.5 kg

Number of GN pans: 8 x GN1/3

Temperature set range: +2°C to +10°C

Energy consumption in 24h: 1.25 kWh

\$1,500.00+GST

Storage Chest Freezers - Stainless Steel Top


Features:

- White painted steel body with stainless steel lid
- Aluminium liner material
- Static cooling system with manual defrosting
- Door handle with lock
- Plastic coated steel baskets
- Frequency/voltage: 50Hz/220-240 V

- 75mm thick insulation
- Castor wheels
- Internal light
- Refrigerant: 134a
- Ambient temperatures from +16°C to +38°C



ESS550H

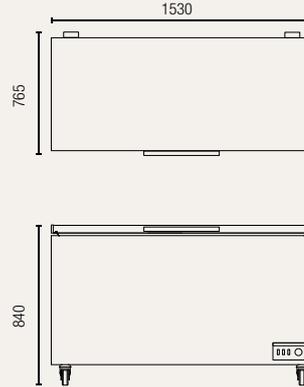

Gross volume: 550 L

Exterior dimensions in mm: 1530w x 765d x 840h

Number of baskets: 5


Temperature set range: -18°C to -25°C

Gross/net weight: 83/75 kg

Energy consumption in 24h: 1.6 kWh

\$2,150.00+GST

ESS650H

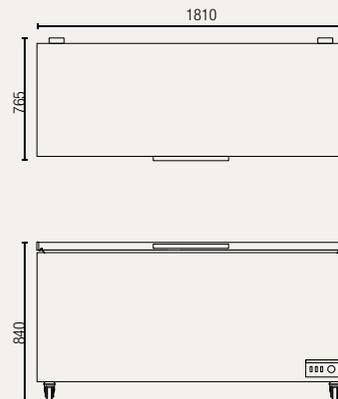

Gross volume: 650 L

Exterior dimensions in mm: 1810w x 765d x 840h

Number of baskets: 6

Temperature set range: -18°C to -25°C

Gross/net weight: 92/82 kg

Energy consumption in 24h: 1.9 kWh

\$2,450.00+GST



Display Cabinets



Counter Top Display Refrigerators

Features:

- Double curved glass door (front and back) for easy stock rotation
- Lockable doors with handle
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Frequency/voltage: 50Hz/220-240 V
- Available in black or white
- Shelf material: chrome coated steel
- Internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +32°C




CTD78



available in
Black or
White



Double lockable curved doors

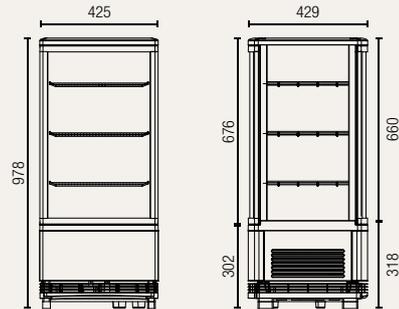

Gross volume: 86 L
Exterior dimensions in mm: 425w x 429d x 978h
Number of adjustable shelves: 3

Temperature set range: +2°C to +12°C
Gross/net weight: 39/36.5 kg
Energy consumption in 24h: 1.9kWh

\$1,100.00+GST


CTD78LED



available in
Black or
White



Double lockable curved doors

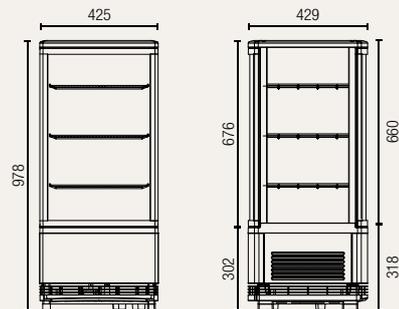

Gross volume: 86 L
Exterior dimensions in mm: 425w x 429d x 978h
Number of adjustable shelves: 3
LED strip on corners: yes

Temperature set range: +2°C to +12°C
Gross/net weight: 39/36.5 kg
Energy consumption in 24h: 1.9kWh

\$1,250.00+GST


Upright Display Refrigerators

Features:

- Double glazed curved glass door with handle
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Internal LED lights on corners
- Frequency/voltage: 50Hz/220-240 V
- Shelf material: chrome coated steel
- Removable top light box
- Castor wheels
- Refrigerant: R290
- Ambient temperatures from +16°C to +32°C



CTD235 Black

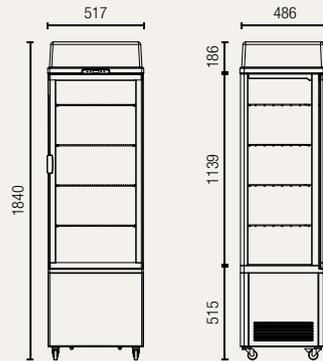

Gross volume: 235 L

Exterior dimensions in mm: 517w x 486d x 1840h

Number of adjustable shelves: 4


Temperature set range: +2°C to +12°C

Gross/net weight: 80.5/76.4 kg

Energy consumption in 24h: 5.46 kWh

\$2,500.00+GST

CTD235 White

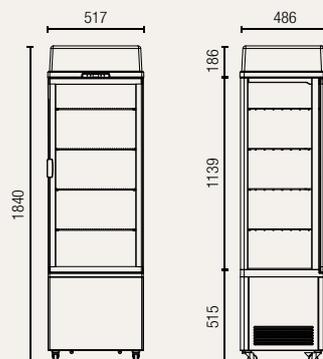

Gross volume: 235 L

Exterior dimensions in mm: 517w x 486d x 1840h

Number of adjustable shelves: 4

Temperature set range: +2°C to +12°C

Gross/net weight: 80.5/76.4 kg

Energy consumption in 24h: 5.46 kWh

\$2,500.00+GST

Upright Display Refrigerators

Features:


- Lockable double glazed doors with handles
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Plastic coated steel shelves
- Frequency/voltage: 50Hz/220-240 V
- White steel external and internal finish
- LED internal light
- Castor wheels
- Refrigerant: R134a
- Ambient temperatures from +16°C to +38°C



DC400P



available in
Black or
White

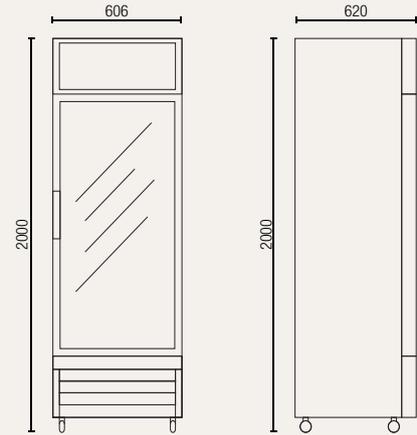

Gross volume: 400 L

Exterior dimensions in mm: 606w x 620d x 2000h

Number of adjustable shelves: 4

Temperature set range: 0°C to +10°C

Gross/net weight: 98/83 kg


Energy consumption in 24h: 4 kWh

\$2,000.00+GST

DC1000P



available in
Black or
White

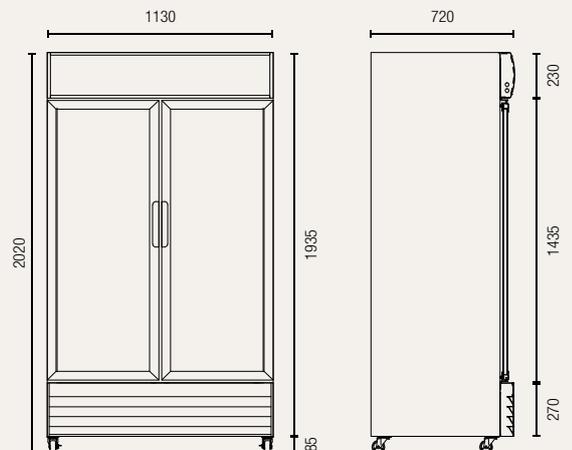

Gross volume: 1000 L

Exterior dimensions in mm: 1130w x 720d x 2020h

Number of adjustable shelves: 8

Temperature set range: 0°C to +10°C

Gross/net weight: 175/155 kg

Energy consumption in 24h: 5.6 kWh

\$3,600.00+GST

Supermarket Display Refrigerators


Features:

- Double glazed glass door with handle
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- LED internal light
- Frequency/voltage: 50Hz/220 V

- Powder coated steel cabinet finish
- Plastic coated steel shelves
- Castor wheels
- Refrigerant: R290
- Ambient temperatures from +16°C to +38°C



SMC1500

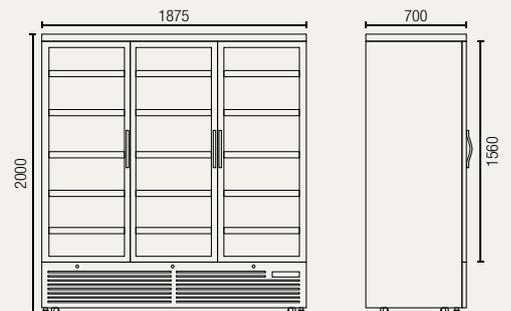

Gross volume: 1260 L

Exterior dimensions in mm: 1875w x 730d x 2000h

Number of adjustable shelves: 15

Temperature set range: 0°C to +6°C

Gross/net weight: 225/210 kg

Energy consumption in 24h: 11.5 kWh

\$6,400.00+GST


Supermarket Display Freezers

Features:

- Triple glazed glass door with handle
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- LED internal light
- Frequency/voltage: 50Hz/220 V
- Powder coated steel cabinet finish
- Plastic coated steel shelves
- Castor wheels
- Refrigerant: R290
- Ambient temperatures from +16°C to +38°C



SMF1500

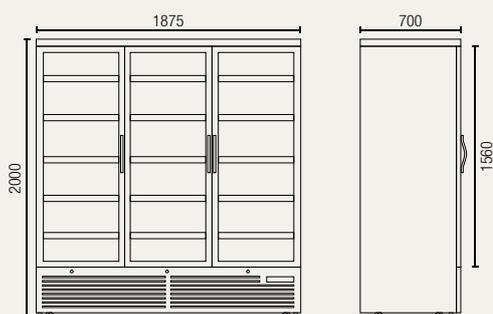

Gross volume: 1260 L

Exterior dimensions in mm: 1875w x 730d x 2000h

Number of adjustable shelves: 15

Temperature set range: -16°C to -22°C

Gross/net weight: 275/260 kg

Power point required: 15 Amp

Energy consumption in 24h: 35.9 kWh

\$9,700.00+GST

Backbar Display Refrigerators - Swing Door



Features:

- Lockable double glazed glass doors
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Black steel external finish and aluminium internal finish
- Frequency/voltage: 50Hz/220-240 V

- Shelf material: chrome coated steel
- LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +38°C



UBC210



Gross volume: 219 L

Exterior dimensions in mm: 900w x 530d x 895h

Number of adjustable shelves: 4



Temperature set range: 0°C to +10°C

Gross/net weight: 65/59 kg

Energy consumption in 24h: 1.8 kWh

\$1,500.00+GST

UBC330



Gross volume: 339 L

Exterior dimensions in mm: 1350w x 530d x 895h

Number of adjustable shelves: 6

Temperature set range: 0°C to +10°C

Gross/net weight: 84/80 kg

Energy consumption in 24h: 2.1 kWh

\$2,000.00+GST

Backbar Display Refrigerators - Swing Door

Features:

- Lockable double glazed glass doors
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Black steel external finish and aluminium internal finish
- Frequency/voltage: 50Hz/220-240 V



- Shelf material: chrome coated steel
- LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +38°C



UBC210L



NEW
with
lower height



Gross volume: 199 L

Exterior dimensions in mm: 900w x 530d x 835h

Number of adjustable shelves: 4

Temperature set range: 0°C to +10°C

Gross/net weight: 61/57 kg



Energy consumption in 24h: 1.8 kWh

\$1,500.00+GST

UBC330L



NEW
with
lower height



Gross volume: 308 L

Exterior dimensions in mm: 1350w x 530d x 835h

Number of adjustable shelves: 6

Temperature set range: 0°C to +10°C

Gross/net weight: 82/78 kg

Energy consumption in 24h: 2.1 kWh

\$2,000.00+GST

Backbar Display Refrigerators - Sliding Door


Features:

- Lockable double glazed glass doors
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Black steel external finish and aluminium internal finish
- Frequency/voltage: 50Hz/220-240 V

- Shelf material: chrome coated steel
- LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +38°C



UBC210S



Gross volume: 208 L

Exterior dimensions in mm: 900w x 530d x 900h

Number of adjustable shelves: 4


Temperature set range: 0°C to +10°C

Gross/net weight: 72/62 kg

Energy consumption in 24h: 1.9 kWh

\$1,500.00+GST

UBC330S



Gross volume: 330 L

Exterior dimensions in mm: 1350w x 530d x 900h

Number of adjustable shelves: 6

Temperature set range: 0°C to +10°C

Gross/net weight: 90/80 kg

Energy consumption in 24h: 2.5 kWh

\$2,000.00+GST

Backbar Display Refrigerators - Sliding Door

Features:

- Lockable double glazed glass doors
- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- Black steel external finish and aluminium internal finish
- Frequency/voltage: 50Hz/220-240 V


- Shelf material: chrome coated steel
- LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +38°C



UBC210SL



NEW
with
lower height



Gross volume: 199 L

Exterior dimensions in mm: 900w x 530d x 835h

Number of adjustable shelves: 4

Temperature set range: 0°C to +10°C

Gross/net weight: 61/57 kg


Energy consumption in 24h: 1.8 kWh

\$1,500.00+GST

UBC330SL



NEW
with
lower height



Gross volume: 308 L

Exterior dimensions in mm: 1350w x 530d x 835h

Number of adjustable shelves: 6

Temperature set range: 0°C to +10°C

Gross/net weight: 82/78 kg

Energy consumption in 24h: 2.1 kWh

\$2,000.00+GST

Cake Display Refrigerators



Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system with auto defrosting
- Double layer glass for maximum insulation
- Dark grey stainless steel finish
- Shelf material: frosted glass

- Sliding door for easy access
- LED internal light
- Refrigerant: R290
- Frequency/voltage: 50Hz/220-240 V
- Ambient temperatures from +16°C to +30°C



CDS309



Gross volume: 390 L

Exterior dimensions in mm: 940w x 688d x 1410h

Number of adjustable shelves: 3



Temperature set range: 0°C to +12°C

Gross/net weight: 190/162 kg

Energy consumption in 24h: 4.42 kWh

\$5,000.00+GST

CDS312



Gross volume: 530 L

Exterior dimensions in mm: 1240w x 688d x 1410h

Number of adjustable shelves: 3



Temperature set range: 0°C to +12°C

Gross/net weight: 229/195 kg

Energy consumption in 24h: 5.96 kWh

\$5,900.00+GST

CDS315



Gross volume: 670 L

Exterior dimensions in mm: 1540w x 688d x 1410h

Number of adjustable shelves: 3

Temperature set range: 0°C to +12°C

Gross/net weight: 252/229 kg

Energy consumption in 24h: 6.15 kWh

\$7,000.00+GST

Cake Display Refrigerators



Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system with auto defrosting
- Double layer glass for maximum insulation
- Dark grey stainless steel finish
- Shelf material: frosted glass

- Sliding door for easy access
- LED internal light
- Refrigerant: R290
- Frequency/voltage: 50Hz/220-240 V
- Ambient temperatures from +16°C to +30°C



CDS209



Gross volume: 270 L

Exterior dimensions in mm: 940w x 688d x 1200h

Number of adjustable shelves: 2



Temperature set range: 0°C to +12°C

Gross/net weight: 154/135 kg

Energy consumption in 24h: 4.30 kWh

\$4,800.00+GST

CDS212



Gross volume: 370 L

Exterior dimensions in mm: 1240w x 688d x 1200h

Number of adjustable shelves: 2



Temperature set range: 0°C to +12°C

Gross/net weight: 188/155 kg

Energy consumption in 24h: 5.56 kWh

\$5,700.00+GST

CDS215



Gross volume: 470 L

Exterior dimensions in mm: 1540w x 688d x 1200h

Number of adjustable shelves: 2

Temperature set range: 0°C to +12°C

Gross/net weight: 230/182 kg

Energy consumption in 24h: 5.58 kWh

\$6,800.00+GST

Cake Display Refrigerators



Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system with auto defrosting
- Double layer glass for maximum insulation
- Dark grey stainless steel finish
- Shelf material: frosted glass

- Sliding door for easy access
- LED internal light
- Refrigerant: R290
- Frequency/voltage: 50Hz/220-240 V
- Ambient temperatures from +16°C to +30°C



CDS309B



Gross volume: 390 L

Exterior dimensions in mm: 940w x 688d x 1410h

Number of adjustable shelves: 3



Temperature set range: 0°C to +12°C

Gross/net weight: 190/162 kg

Energy consumption in 24h: 4.42 kWh

\$5,000.00+GST

CDS312B



Gross volume: 530 L

Exterior dimensions in mm: 1240w x 688d x 1410h

Number of adjustable shelves: 3



Temperature set range: 0°C to +12°C

Gross/net weight: 229/195 kg

Energy consumption in 24h: 5.96 kWh

\$5,900.00+GST

CDS315B



Gross volume: 670 L

Exterior dimensions in mm: 1540w x 688d x 1410h

Number of adjustable shelves: 3

Temperature set range: 0°C to +12°C

Gross/net weight: 252/229 kg

Energy consumption in 24h: 6.15 kWh

\$7,000.00+GST

Cake Display Refrigerators



Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system with auto defrosting
- Double layer glass for maximum insulation
- Dark grey stainless steel finish
- Shelf material: frosted glass

- Sliding door for easy access
- LED internal light
- Refrigerant: R290
- Frequency/voltage: 50Hz/220-240 V
- Ambient temperatures from +16°C to +30°C



CDS209B



Gross volume: 270 L

Exterior dimensions in mm: 940w x 688d x 1200h

Number of adjustable shelves: 2



Temperature set range: 0°C to +12°C

Gross/net weight: 154/135 kg

Energy consumption in 24h: 4.30 kWh

\$4,800.00+GST

CDS212B



Gross volume: 370 L

Exterior dimensions in mm: 1240w x 688d x 1200h

Number of adjustable shelves: 2



Temperature set range: 0°C to +12°C

Gross/net weight: 188/155 kg

Energy consumption in 24h: 5.56 kWh

\$5,700.00+GST

CDS215B



Gross volume: 470 L

Exterior dimensions in mm: 1540w x 688d x 1200h

Number of adjustable shelves: 2

Temperature set range: 0°C to +12°C

Gross/net weight: 230/182 kg

Energy consumption in 24h: 5.58 kWh

\$6,800.00+GST

Counter Top Cake Display Refrigerators


Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system
- Sliding door for easy access
- Frequency/voltage: 50Hz/220-240 V

- Shelf material: chrome coated steel
- Top LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +32°C



CTC120

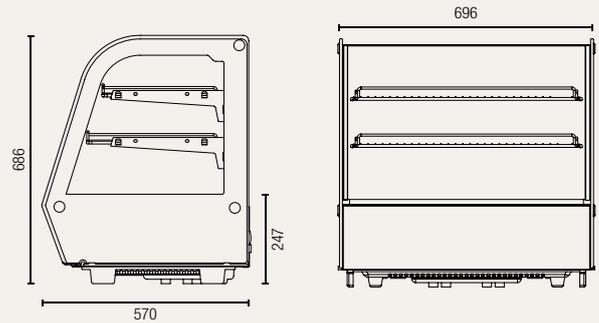

Gross volume: 120 L

Exterior dimensions in mm: 710w x 575d x 686h

Number of adjustable shelves: 2


Temperature set range: 0°C to +12°C

Gross/net weight: 66/64 kg

Energy consumption in 24h: 2.75 kWh

\$1,700.00+GST

CTC160

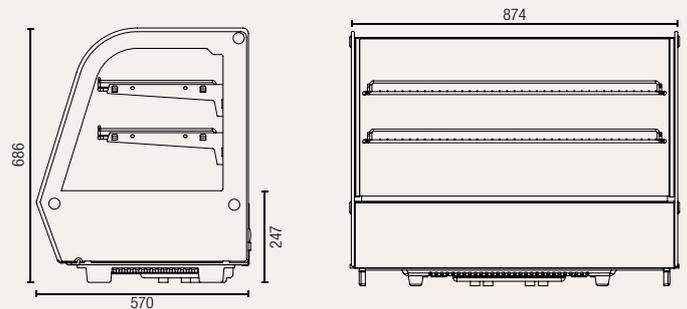

Gross volume: 160 L

Exterior dimensions in mm: 890w x 575d x 686h

Number of adjustable shelves: 2

Temperature set range: 0°C to +12°C

Gross/net weight: 74/71 kg

Energy consumption in 24h: 2.85 kWh

\$1,900.00+GST

Counter Top Cake Display Refrigerators

Features:

- Digital temperature display and electronic controller
- Dynamic fan forced cooling system
- Sliding door for easy access
- Frequency/voltage: 50Hz/220-240 V



- Shelf material: chrome coated steel
- Top LED internal light
- Refrigerant: R600a
- Ambient temperatures from +16°C to +32°C



CTC120S



NEW
with
square profile



Gross volume: 120 L

Exterior dimensions in mm: 702w x 568d x 686h

Number of adjustable shelves: 2

Temperature set range: 0°C to +12°C

Gross/net weight: 60/57 kg



Energy consumption in 24h: 2.75 kWh

\$1,700.00+GST

CTC160S



NEW
with
square profile

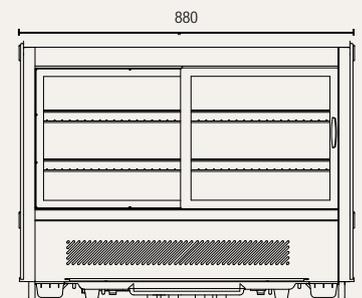

Gross volume: 160 L

Exterior dimensions in mm: 880w x 568d x 686h

Number of adjustable shelves: 2

Temperature set range: 0°C to +12°C

Gross/net weight: 69/66 kg

Energy consumption in 24h: 2.78 kWh

\$1,900.00+GST

Ambient Cake Display

Features:

- Attractive design
- Fully assembled
- Easy to clean laminate base
- Rubber feet



- Elegant timber look thick laminate base



- Door hinge designed to hold door open



- Stainless steel look door handle with stopper

Available in 3 attractive colours:



- Elegant Walnut



- Woodgrain Black



- Natural Oak

CD35



CD35-0



CD35-W



CD35-B



Gross Volume: 35L

Dimension in mm: 554w x 361d x 305h

- Square glass
- Single tier
- Double opening to the front and back

\$500.00+GST

CD45



CD45-0



CD45-W



CD45-B



Gross Volume: 45L

Dimension in mm: 554w x 376d x 370h

- Curved glass
- Double tier

\$600.00+GST

Ambient Cake Display

CD50



CD50-O



CD50-W



CD50-B



Gross Volume: 50L

Dimension in mm: 554w x 361d x 370h

- Square glass
- Double tier
- Double opening to the front and back

\$550.00+GST

CD70



CD70-O



CD70-W



CD70-B



Gross Volume: 70L

Dimension in mm: 350w x 600d x 520h

- Perspex curved front
- Glass sides and shelves
- Double tier

\$650.00+GST

Display Freezers



Upright Display Freezers

Features:

- Digital controller and digital temperature display
- Dynamic fan forced cooling system with automatic defrosting
- U-shape steel spacer at rear (45mm) for ventilation purpose
- Plastic coated steel shelves
- Frequency/voltage: 50Hz/220-240 V
- Top lightbox
- Self closing door with handle and lock
- Heated triple layer glass door
- Refrigerant: R404a
- Ambient temperatures from +16°C to +32°C



SD370W



Gross volume: 370 L

Exterior dimensions in mm: 660w x 663d x 2110h

Number of adjustable shelves: 5 +1 base

Internal light: two vertical inner light

Lightbox dimension in mm: 660w x 300h

Temperature set range: ≤-18°C

Gross/net weight: 125/116 kg

Energy consumption in 24h: 9.8 kWh

Castors: 4 roller wheels + 2 adjustable stabilisers

\$4,900.00+GST

Ice Cream Scooping Freezers

Features:

- Analog temperature display and controller
- Static cooling system
- Sliding curved glass doors with lock
- Rear perspex sliding doors
- Removable rubber bumper on the engine side (30mm) for ventilation purpose
- 70 mm thick insulation
- Frequency/voltage: 50Hz/220-240 V
- 5L stainless steel tubs included
- Castor wheels
- Powder coated steel exterior dan interior
- Front light box and internal LED lights
- Mid glass shelf included (not pictured)
- Scoop washer included
- Ambient temperatures from +16°C to +38°C



SD235S2



5L stainless steel tubs included



Scoop washer included

Gross volume: 235 L

Exterior dimensions in mm: 836w x 838d x 1245h

Number 5L tubs: 4

Rear door storage access: no

Temperature set range: $\leq -18^{\circ}\text{C}$

Gross/net weight: 108/82 kg

Energy consumption in 24h: 1.8 kWh

Refrigerant: R134a

\$3,750.00+GST

SD325S2



5L stainless steel tubs included



Scoop washer included



Rear door for easy storage access

Gross volume: 325 L

Exterior dimensions in mm: 1080w x 838d x 1245h

Number 5L tubs: 6

Rear door storage access: yes

Temperature set range: $\leq -18^{\circ}\text{C}$

Gross/net weight: 138/109 kg

Energy consumption in 24h: 2.3 kWh

Refrigerant: R134a

\$4,650.00+GST

Ice Cream Scooping Freezers

Features:

- Analog temperature display and controller
- Static cooling system
- Sliding curved glass doors with lock
- Rear perspex sliding doors
- Removable rubber bumper on the engine side (30mm) for ventilation purpose
- 70 mm thick insulation
- Frequency/voltage: 50Hz/220-240 V
- 5L stainless steel tubs included
- Castor wheels
- Powder coated steel exterior dan interior
- Front light box and internal LED lights
- Mid glass shelf included (not pictured)
- Scoop washer included
- Ambient temperatures from +16°C to +38°C



SD415S2



5L stainless steel tubs included



Scoop washer included



Rear door for easy storage access

Gross volume: 415 L

Exterior dimensions in mm: 1350w x 838d x 1245h

Number 5L tubs: 9

Rear door storage access: yes

Temperature set range: $\leq -18^{\circ}\text{C}$

Gross/net weight: 162/123 kg

Energy consumption in 24h: 3.1 kWh

Refrigerant: R134a

\$5,500.00+GST

SD575S2



5L stainless steel tubs included



Scoop washer included



Rear door for easy storage access

Gross volume: 575 L

Exterior dimensions in mm: 1720w x 838d x 1245h

Number 5L tubs: 12

Rear door storage access: yes

Temperature set range: $\leq -18^{\circ}\text{C}$

Gross/net weight: 199/152 kg

Energy consumption in 24h: 4.5 kWh

Refrigerant: R404a

\$6,300.00+GST

Flat Glass Display Chest Freezers

Features:

- Analog temperature display and controller
- Static cooling system
- Sliding flat glass doors with lock
- Removable rubber bumper on the engine side (30mm) for ventilation purpose
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel baskets
- Castor wheels
- Powder coated steel exterior dan interior
- 70 mm thick insulation
- Ambient temperatures from +16°C to +38°C



SD450



Gross volume: 390 L

Exterior dimensions in mm: 1314w x 694d x 830h

Number of baskets: 4

Refrigerant: R134a

Temperature set range: $\leq -18^{\circ}\text{C}$

Gross/net weight: 81/73 kg

Energy consumption in 24h: 3.25 kWh

\$2,100.00+GST

SD650



Gross volume: 566 L

Exterior dimensions in mm: 1799w x 694d x 830h

Number of baskets: 6

Refrigerant: R404a

Temperature set range: $\leq -18^{\circ}\text{C}$

Gross/net weight: 99/89 kg

Energy consumption in 24h: 4.6 kWh

\$2,800.00+GST

Curved Glass Display Chest Freezers

Features:

- Analog temperature display and controller
- Static cooling system
- Sliding curved glass doors with lock
- Removable rubber bumper on the engine side (30mm) for ventilation purpose
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel baskets
- Castor wheels
- Powder coated steel exterior dan interior
- 70 mm thick insulation
- Ambient temperatures from +16°C to +38°C



SD151



Gross volume: 151 L

Exterior dimensions in mm: 584w x 694d x 850h

Number of baskets: 2

Refrigerant: R134a

Temperature set range: $\leq -18^{\circ}\text{C}$

Gross/net weight: 55/48 kg

Energy consumption in 24h: 1.6 kWh

\$1,600.00+GST

SD400



Gross volume: 374 L

Exterior dimensions in mm: 1240w x 694d x 850h

Number of baskets: 5

Refrigerant: R134a

Temperature set range: $\leq -18^{\circ}\text{C}$

Gross/net weight: 82/71 kg

Energy consumption in 24h: 2.0 kWh

\$2,100.00+GST

SD575K



Gross volume: 575 L

Exterior dimensions in mm: 1684w x 694d x 850h

Number of baskets: 7

Refrigerant: R404a

Temperature set range: $\leq -18^{\circ}\text{C}$

Gross/net weight: 108/90 kg

Energy consumption in 24h: 3.7 kWh

\$2,700.00+GST

Supermarket Island Freezers



Supermarket Island Freezers

Features:

- Digital temperature display and controller
- Static cooling system
- Auto defrosting system
- Sliding curved glass doors
- Frequency/voltage: 50Hz/220-240 V
- Plastic coated steel baskets
- Castor wheels
- LED internal light
- Powder coated steel exterior dan interior
- 80 mm thick insulation
- Drain tube integrated



HR-21H



Gross volume: 826 L

Exterior dimensions in mm: 2105 x 816d x 850h

Number of baskets: 8

Temperature set range: $\leq -18^{\circ}\text{C}$

Gross/net weight: 135/120 kg

Nominal power consumption: 6 W

\$7,150.00+GST

Vaccine Refrigerators




Vaccine Refrigerators

Features:

- Digital controller with digital temperature display
- Temperature data logger included
- Dynamic fan forced cooling system with automatic defrosting
- Double glazed glass door
- White External and Interior Finish
- Internal LED light
- Frequency/voltage: 50Hz/220-240 V
- Leveling adjustable feet
- QCPP approved
- Plastic coated steel shelves
- Battery backup controller
- Refrigerant: R134a
- Ambient temperatures from +16°C to +32°C



MV30



Gross/Net volume: 30/29 L

Exterior dimensions in mm: 445w x 485d x 535h

Number of shelves: 3

Max. noise level: 50 dB


Temperature range: +2°C to +8°C

Gross/net weight: 29/27 kg

Energy consumption in 24h: 0.8 kWh

\$1,800.00+GST

MV60



Gross/Net volume: 62/59 L

Exterior dimensions in mm: 445w x 485d x 725h

Number of shelves: 4

Max. noise level: 50 dB


Temperature range: +2°C to +8°C

Gross/net weight: 33/31 kg

Energy consumption in 24h: 0.8 kWh

\$2,000.00+GST

MV150



Gross/Net volume: 148/145 L

Exterior dimensions in mm: 595w x 595d x 820h

Number of shelves: 4

Max. noise level: 50 dB

Temperature range: +2°C to +8°C

Gross/net weight: 45/42 kg

Energy consumption in 24h: 1.35 kWh

\$2,500.00+GST

Vaccine Refrigerators

Features:

- Digital controller with digital temperature display
- Temperature data logger included
- Dynamic fan forced cooling system with automatic defrosting
- Double glazed glass door
- White External and Interior Finish
- Internal LED light
- Frequency/voltage: 50Hz/220-240 V
- Leveling adjustable feet
- QCPP approved
- Plastic coated steel shelves
- Battery backup controller
- Refrigerant: R134a
- Ambient temperatures from +16°C to +32°C




MV300



Temperature data logger included



Battery backup for controller in case of power outage

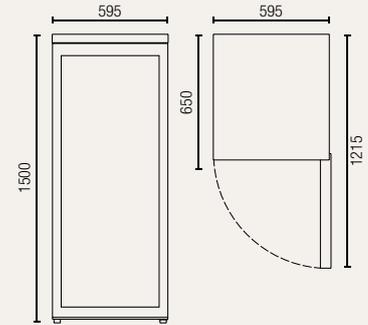

Gross/Net volume: 308/300 L
Exterior dimensions in mm: 595w x 650d x 1500h
Number of shelves: 8
Max. noise level: 55 dB

Temperature range: +2°C to +8°C
Gross/net weight: 78/72 kg
Energy consumption in 24h: 2.9 kWh

\$3,600.00+GST


MV400



Temperature data logger included



Battery backup for controller in case of power outage

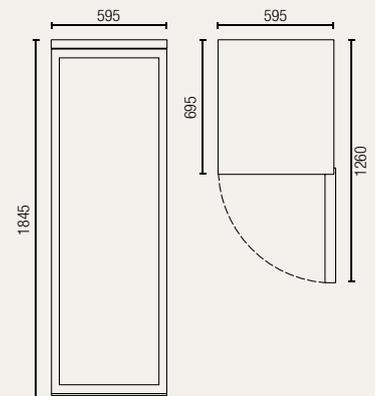

Gross/Net volume: 408/400 L
Exterior dimensions in mm: 595w x 695d x 1845h
Number of shelves: 8
Max. noise level: 65 dB

Temperature range: +2°C to +8°C
Gross/net weight: 92/84 kg
Energy consumption in 24h: 3.1 kWh

\$4,100.00+GST

Warranty Against Defects

Exquisite Marketing Australia Pty. Ltd. (A.C.N. 108 843 054) of Unit 5, 6 Garden Road, Clayton VIC 3168 Australia (Phone: (03) 9561 1595; Email: sales@exquisiteeast.com.au) ("Exquisite") warrants to the original purchaser ("Customer") who has purchased any of its following products ("Product") that they will be free from defects in workmanship and material for their respective periods as set out below from and including the date of invoice ("Warranty Period"). It is, however, expressly agreed that to the extent permitted by law, Exquisite is not liable for any indirect or consequential loss, loss of profit or any other economic loss arising from any defects covered by the Warranty. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

- Exquisite Underbench Storage Refrigerators and Freezers** - Thirty (30) months* for materials and workmanship
- Exquisite Single Door Underbench Storage Refrigerators and Freezers** - Twelve (12) months for materials and workmanship
- Exquisite Upright Storage Refrigerators and Freezers** - Thirty (30) months* for materials and workmanship
- Exquisite Food Preparation Refrigerators** - Thirty (30) months* for materials and workmanship
- Exquisite Counter Top Food Preparation Refrigerators** - Fifteen (15) months* for materials and workmanship
- Exquisite Storage Chest Freezers - Stainless Steel Top** - Twelve (12) months for materials and workmanship
- Exquisite Counter Top Display Refrigerators** - Fifteen (15) months* for materials and workmanship
- Exquisite Heated Display Cabinets** - Twelve (12) months for materials and workmanship
- Exquisite Upright Display Refrigerators - CTD235** - Fifteen (15) months* for materials and workmanship
- Exquisite Upright Display Refrigerators - DC400P, DC1000P and SMC1500** - Twelve (12) months for materials and workmanship
- Exquisite Backbar Refrigerators** - Twelve (12) months for materials and workmanship
- Exquisite Cake Display Refrigerators** - Twelve (12) months for materials and workmanship
- Exquisite Counter Top Cake Display Refrigerators** - Twelve (12) months for materials and workmanship
- Exquisite Upright Display Freezers** - Twelve (12) months for materials and workmanship
- Exquisite Ice Cream Scooping Freezers** - Twelve (12) months for materials and workmanship
- Exquisite Flat Glass Display Chest Freezers** - Twenty four (24) months for materials and workmanship
- Exquisite Curved Glass Display Chest Freezers** - Twenty four (24) months for materials and workmanship
- Exquisite Supermarket Island Freezers** - Twelve (12) months for materials and workmanship
- Exquisite Vaccine Refrigerators** - Twenty four (24) months for materials and workmanship

Should the Customer find any defect in material or workmanship within the Warranty Period, Exquisite will at its sole discretion either replace the Product or repair the Product at no cost subject to the following terms and conditions ("Warranty").

1. The Warranty applies if and only if the Customer has used the Product in accordance with the directions given by Exquisite and strictly for the purpose to which the Product is intended.
2. The Warranty Period begins on the original date of purchase (being the date stated on Exquisite's invoice or the invoice of Exquisite's authorised dealer ("Invoice")).
3. The Warranty is valid only for Products originally purchased and used within Australia.
4. The Customer must provide to Exquisite details of the Invoice (including serial number and model code) when making a claim under the Warranty. Incorrect or incomplete details may delay the processing of the claim. Exquisite reserves the right to charge the Customer for all reasonable expenses if the information provided by the Customer is incorrect or the Product was in fact not originally purchased by the Customer directly from Exquisite.
5. Exquisite or its authorised agent has the right to assess the Product to determine the cause of the defect. The Customer must make the Product accessible for Exquisite or its authorised agent to assess and, if applicable, to repair including removing all personal items in the way. If required, the Customer must at the Customer's own cost (unless otherwise prescribed by law) return the Product to Exquisite or its authorised agent. The Product must be returned with all original components including but not limited to manual, keys and bracket.
6. The Warranty does not apply:
 - If notice of the defect has not been given by the Customer within the Warranty Period; or
 - If the defect arises from or in the reasonable opinion of Exquisite or its authorised agent, is likely to arise from one or more of the following:
 - connection to improper, inadequate or faulty electricity;
 - damage or failure as a consequence of not removing the packaging or transportation material before use;
 - natural wear and tear including but not limited to filters, fuses, lamps, batteries, handles, locks, hinges, glass or plastic components and liquid containing components;
 - extraordinary or unforeseeable events including but not limited to voltage/power surges, irregular electric power supply, natural events or disasters such as flooding and earthquake, riots and sabotage;
 - improper use of cleaning agents, detergents, bleaches or other chemical additives or agents of a corrosive nature;
 - breakage, either intentionally or accidentally, to any part of the Product;
 - any modification to, tampering with or repair or servicing of the Product except by Exquisite or its authorised agent or using parts not approved or authorised by Exquisite;
 - improper, reckless, negligent or unsuited use of the Product including but not limited to: (a) use for an unspecified purpose; (b) use in an environment where the ambient temperature and relative humidity are outside the operating parameters specified for the Product; (c) movement of the Product when in operation (for clarity, the Products are designed for stationary operation only and must be connected directly to fixed wall power supply); (d) improper adjustment made such as to the analogue thermostat or digital controller when the Product is in operation;
 - corrosion or damage caused by foreign object externally or internally;
 - engine, mechanical or technical failure (but not limited to compressor failure) due to one or more of the following:
 - inadequate and/or irregular maintenance (of the type specified or recommended by its manufacturer/Exquisite) of components including but not limited to condensers and filters;
 - inadequate and/or irregular cleaning of the condenser (fortnightly and more frequently if required);
 - failure to provide adequate ventilation for the Product as specified or recommended by its manufacturer/Exquisite;
 - fair wear and tear.
7. Any repair must be undertaken either by Exquisite or an agent authorised by Exquisite. Otherwise, Exquisite is entitled to avoid the Warranty.
8. The Warranty Period is not extended or renewed by any successful claim whereby the Product is replaced or repaired.
9. Exquisite makes no representation as to the time frame within which any repair can or will be carried out. In general, any repair will be restricted to normal business hours Monday to Friday (9am - 5pm) excluding public holidays and weekends. Exquisite is not liable for the cost of the authorised service agents other than the time specified in this point. Exquisite is not liable for travelling time of more than 50 kilometres from an authorised service agent or 1 hour from the service agent, whichever is lesser. For goods located outside this area, it is the customer responsibility and cost to transport goods forth and back. When the customer is not able to transport the goods, the customer shall be responsible to pay upfront payment for Exquisite to arrange the transportation of the goods, AND / OR to any necessary travelling expenses for Exquisite service agents to attend the service.
10. Where Exquisite elects to replace rather than repair a Product but no identical replacement is available, Exquisite has the right to replace the Product with one of a similar standard and design then available from its range. Exquisite is not responsible for the re-packing and installation of any replacement.
11. Exquisite has the rights to invoice a customer directly for a service call, parts, and labour, for a service that was deemed by its authorised service agents for issues not connected to a warranty issue. The invoice is required to be paid within 14 days of the invoice date.

*Applied to selected products purchased from November 2019 onward unless otherwise indicated

Exquisite

Exquisite Marketing Australia Pty. Ltd.
Unit 5, 6 Garden Road
Clayton VIC 3168 Australia

P +61 3 9561 1595, 9561 1695

F +61 3 9561 1690

E sales@exquisiteaust.com.au

WWW.EXQUISITEAUST.COM.AU

All specifications are subject to change without prior notice. Printed in 2019.



All specifications are subject to change without prior notice. Printed in 2021.