



**CAMBRO**

# Equipment

FOOD HOLDING &  
TRANSPORTATION

MOBILE VENDING  
EQUIPMENT

WAREWASHING,  
HANDLING & STORAGE

CAMSHELVING®



# Food Holding and Transportation

Cam GoBox™ — Insulated Carrier Line

Insulated Beverage Containers

Beverage Service Carts

Insulated Top Loading Camcarriers®

Temperature Maintenance Tools

Insulated Front Loading 300MPC & UPC400

UPCS400 Ultra Pan Carrier® S-Series

Ultra Camcarts®

Transporter Capacity Guide

Ultra Pan Carrier® and Ultra Camcart® H-Series

Combo Cart™ Plus

Camtherm® Electric Food Holding Cabinets

Insulated Bakery Container

Camcarts®

Camcarriers®

Tablotherm Insulated Trays





## Cam GoBox™ – Insulated Carrier Line

Cambro's latest line of insulated transporters are ideal for caterers and foodservice operators looking for an ultra-lightweight transporter that offers superior temperature retention to protect food safety and excellent durability to withstand heavy commercial use, all at a budget-friendly price. Just take them and go!


- Thermal Insulation- Holds hot or cold food for many hours.
- Lightweight- Made of EPP (Expanded Polypropylene)- an eco-friendly, high-performance foam material.
- Great Structural Strength- capable of handling significant loads while maintaining its shape and form.
- Excellent Energy Absorption- can withstand substantial impact without damage.
- Chemically Inert- unaffected by oil, grease, and most chemicals.
- Dishwasher safe.
- CFC-Free.
- 100% Recyclable.
- Line your Cam GoBox with a Cambro GN Food Pan and Seal Cover for the ultimate food safety solution. Cambro GN pans protect food and carrier to support HACCP compliance.

Only available from Cambro European Logistics (CEL), Germany.


# Cam GoBox™ – Insulated Carrier Line



## Hot Holding

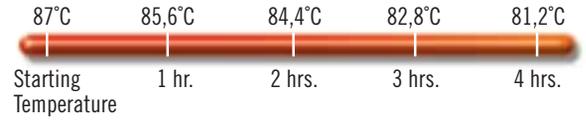

## Cold Holding

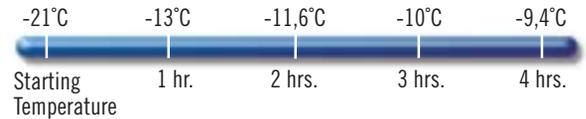

Using Cam GoBox carriers together with Cambro's polycarbonate, polypropylene or high heat GN food pans creates the ideal food-safe, HACCP-compliant holding and transport system.



### Ergonomic Handles

Comfortable handles allow easy and safe lifting of the Cam GoBox.



### Stackability

Cam GoBoxes inter-stack and also stack with major competitive brands.



### Easy Identification

A built-in label area keeps plastic menu tags (included for EPP300 and EPP400) in place for easy content identification or routing. StoreSafe Labels can also be used with Cam GoBoxes.




### Easy Loading and Unloading

Interior wall recesses make loading and unloading easy for both GN 1/1 as well as 1/2 pans.



### 4-Sided Handling

Thoughtfully designed built-in handles along the top of the front loader units allow them to be easily carried from all four sides.

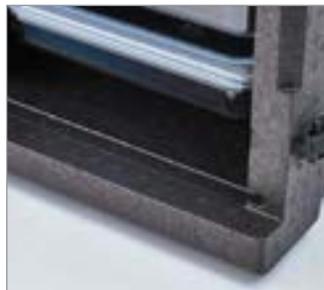

### Drip-Resistant

Built-in condensation barrier helps front loaders to remain drip-resistant.



### Gentle Open and Close

Beveled door edges ensure door can be easily closed and latched.



### Full 270° Access

Durable hinges and latches allow the door to open 270° and remain open securely to the side of the front loader for easy access to products. Latches keep door securely closed during transport.

# Cam GoBox™ – Insulated Carrier Line

Exclusive inter stacking design saves **30%** storage space!



CODE	EPP160	EPP180	EPP180S
DESCRIPTION	EPP Top Loader for 15 cm GN pan	EPP Top Loader for 20 cm GN pan	EPP Stacking Top Loader for 20 cm GN pan
EXTERIOR DIM. L x W x H	60 x 40 x 25,7 cm	60 x 40 x 31,6 cm	60 x 40 x 18,2 cm (top) 58,6 x 33,6 x 10 cm (bottom)
INTERIOR DIM. L x W x H	53,8 x 33,8 x 19,3 cm	53,8 x 33,8 x 25,3 cm	53,8 x 33,8 x 15,9 cm (top) 50,4 x 30,2 x 9,5 cm (bottom)
UNIT WEIGHT	1,07 kg	1,2 kg	1,13 kg
VOLUME	35,5 L	46 L	43 L

Case Pack: 1 Color: Black (110).



CODE	EPP180PKG	EPP180SPKG
PACKAGE INCLUDES	EPP180 Top Loader 18PP (20 cm polypropylene GN pan) 10PPCWSC (Seal Cover)	EPP180S Top Loader 18PP (20 cm polypropylene GN pan) 10PPCWSC (Seal Cover)
UNIT WEIGHT	2,8 kg	2,7 kg
VOLUME	46 L	43 L

Case Pack: 1 Color: Black (110).



CODE	EPP300	EPP400
DESCRIPTION	Front Loader	Front Loader
EXTERIOR DIM. L x W x H	64,5 x 44 x 47,5 cm	64,5 x 44 x 63 cm
INTERIOR DIM. L x W x H	53,5 x 33 x 37 cm	53,5 x 33 x 52,5 cm
UNIT WEIGHT	3,2 kg	3,9 kg
VOLUME	60 L	86 L

Case Pack: 1 Color: Black (110).



## Optional Accessories



CODE	CP3253	HP3253	EPP3253DIV	CD3253EPP	EPPID5
DESCRIPTION	Camchiller® GN 1/2 fits all Cam GoBoxes	Camwarmer® GN 1/2 fits all Cam GoBoxes	ThermoBarrier® fits EPP300 & EPP400	Camdolly® fits all Cam GoBoxes	Plastic ID labels fits all Cam GoBoxes
EXTERIOR DIM. L x W x H	53 x 32,5 x 3 cm	53 x 32,5 x 3 cm	—	—	—
UNIT WEIGHT	3,9 kg	3,25 kg	0,37 kg	4,5 kg	—
COLOR	Cold Blue (159)	Hot Red (158)	Black (110)	Hot Red (158)	(000)


Case Pack: 1

# Cam GoBox™ Capacity Guide


All Cam GoBox carriers are designed with enough room to hold GN 1/1 pans along with Camwarmers or Camchillers, if desired.

## Top Loaders


EPP160

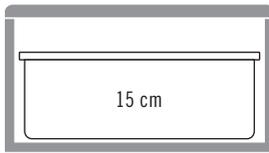

19,5 L

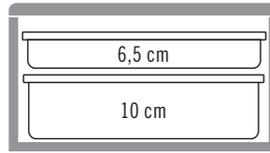


21,5 L

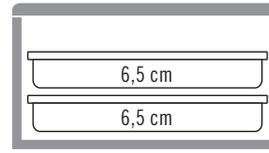


17 L


EPP180

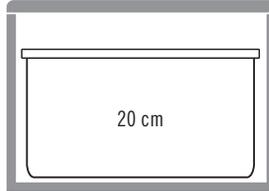


25,5 L

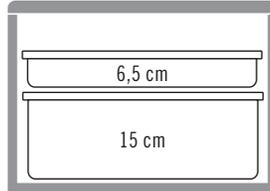


28 L

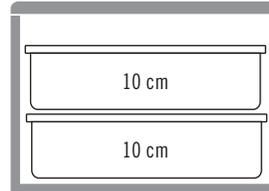

26 L

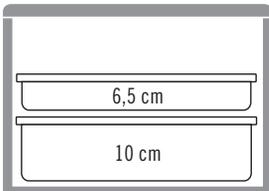

21,5 L

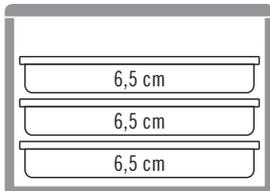


25,5 L




**Note:** Best results will be achieved by loading food pans between 82° to 88°C. Loading metal food pans over 120°C will result in damage to the carrier.




EPP180S

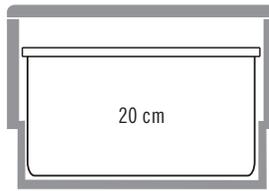


25,5 L

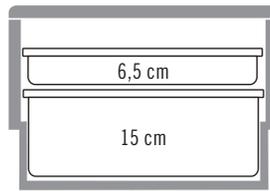

28 L

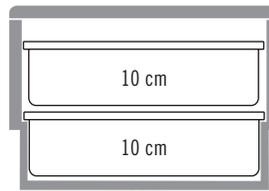


26 L

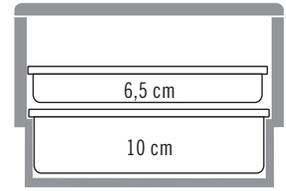


21,5 L

## Front Loaders


EPP300

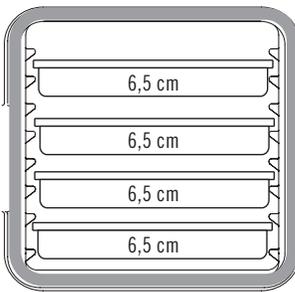


34 L

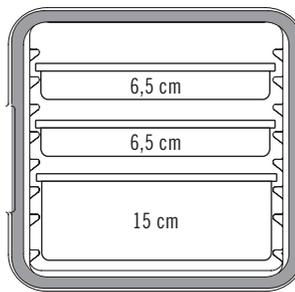

36,5 L

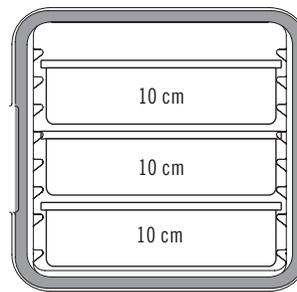


39 L

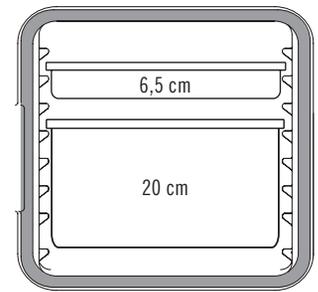


34 L


EPP400

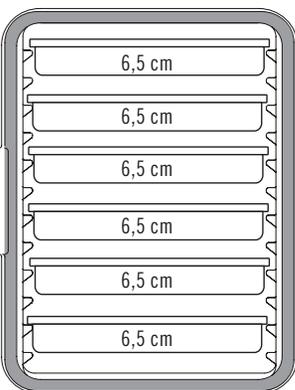


51 L

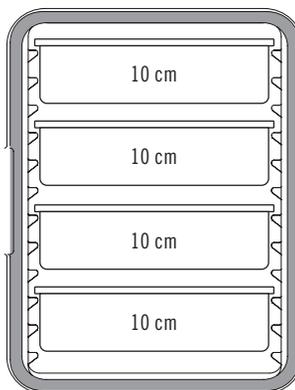

52 L

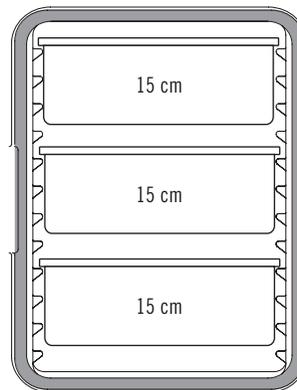

58,5 L

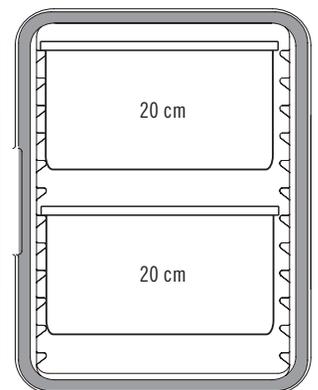

51 L

# Insulated Beverage Containers



- Use to hold, transport and serve hot or cold beverages.
- One piece, seamless double-wall polyethylene with thick foam insulation.
- Sturdy latches secure lids tightly and will never rust.
- Drip-proof recessed spigot for easy self-serve access.
- Stack units on riser to fill large cups or coffee pots.
- Sta-stack interlocking ensures stable stacking during transport and storage.

**Easy Serve Dispenser Color:** Black (110).

UC1000 covered by U.S. Patent D 403,916.

Vent Cap patent pending.



350LCD Camtainer not NSF.

## Camtainer Cover

Durable and attractive covers extend the life of your Camtainers and fit in any serving environment.

Personalization available. Contact your Cambro representative for details. (Models for covers on next page.)



Stack beverage servers during storage and transporting to save space.

### Stacking options:

- 100LCD with 100LCD
- All 250, 350 and 500 units
- UC1000 and 1000LCD



### Vent Cap

Equalizes pressure. Makes the opening of the container much easier.

### E-Z Grip Molded-in Handles

For comfortable, safe transporting.



### Recessed Faucet

Accommodates larger cups. Allows even dispensing and eliminates drips. Two positions: One for continuous pouring and one for individual dispensing.



### Molded-in Metal Backing Plates

Prevents latches from breaking away from the container.



### Ultra Camtainers®

Feature wide nylon latches which are easy to open and close with one hand.



### Camtainers®

Feature sturdy plastic latches that secure lids tightly and will never rust.

## Hot

250LCD	87°C	84,5°C	82°C	79°C	77°C
UC250	88°C	85,5°C	84°C	82°C	80°C
Starting Temperature	1 hr.	2 hrs.	3 hrs.	4 hrs.	

## Cold

250LCD	1°C	1,5°C	2°C	3°C	4°C
UC250	0,5°C	1°C	1°C	1,5°C	2°C
Starting Temperature	1 hr.	2 hrs.	3 hrs.	4 hrs.	

# Ultra Camtainers®

Choose from three sizes for beverage service. A contemporary line, featuring two wide nylon latches per unit that are easy to open and close.



CODE	UC250	UC500	UC1000
<b>CAPACITY</b>	10,4 L	19,9 L	39,7 L
<b>210 ML. CUPS</b>	50	96	192
<b>EXTERIOR DIMENSIONS D x W x H</b>	42,5 x 30 x 50 cm	42,5 x 30 x 68 cm	52 x 41,5 x 65,5 cm
<b>FITS CAMDOLLY</b>	CD100H, CD1826H, CD300H, CD100HB, CD300HB, CD100	CD100H, CD1826H, CD300H, CD100HB, CD300HB, CD100	CD300H, CD1826H, CD2020H, CD100HB, CD300HB, CD1826MTCHB, CD300, CD2020
<b>CAMTAINER COVER</b>	UC250CVR	UC500CVR	UC1000CVR

**Case Pack:** 1 **Colors:** Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Brick Red (402), Green (519), Black (110), Granite Grey (191), Granite Green (192), Granite Sand (194). **Cover Color:** Black (110). Venting plug is covered by US Patent D 553,717 S.

# Camtainers®

The standard for many caterers, choose from four sizes for beverage service and one model without a spigot for soup service. Four sturdy plastic latches on each unit open and close easily and will never rust.



CODE	100LCD	250LCD	500LCD	1000LCD	350LCD (SOUP)
<b>CAPACITY</b>	5,7 L	9,5 L	17,9 L	44,5 L	12,7 L
<b>210 ML. CUPS</b>	27	45	85	214	60
<b>SPIGOT</b>	YES	YES	YES	YES	—
<b>EXTERIOR DIMENSIONS D x W x H</b>	29 x 26,5 x 44 cm	42 x 23 x 47 cm	42 x 23 x 62 cm	53 x 41,5 x 63 cm	42 x 23 x 47 cm
<b>FITS CAMDOLLY</b>	CD1420	CD100H, CD1826H, CD300H, CD2020H, CD100HB, CD300HB, CD1826HB, CD2020HB, CD100, CD2020	CD100H, CD1826H, CD300H, CD2020H, CD100HB, CD300HB, CD1826HB, CD2020HB, CD100, CD2020	CD300H, CD1826H, CD2020H, CD100HB, CD300HB, CD1826MTCHB, CD300, CD2020	CD100H, CD1826H, CD300H, CD2020H, CD100HB, CD300HB, CD1826HB, CD2020HB, CD100, CD2020
<b>CAMTAINER COVER</b>	—	250LDCVCR	500LDCVCR	1000LDCVCR	—

**Case Pack:** 1 **Colors:** Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Brick Red (402), Green (519), Black (110), Hot Red (158). **Cover Color:** Black (110). Venting plug is covered by US Patent D 553,717 S.

# Camserver® — Holds The Heat for Hours.

- A front-of-house beverage server for hot or cold beverages that does not require canned heating.
- Double-wall polyethylene shell with thick foam insulation retains temperatures for hours.

**Colors:** Black (110), Dark Taupe (417), Granite Grey (191).



Convenient top-fill opening for fast replenishment without removing lid.

CODE	EXTERNAL DIMENSIONS H x W x D	CAPACITY	210 ML CUPS	CASE PACK
CSR3	60 x 34 x 46,5 cm	11,5 L	54	1
CSR5	71 x 34 x 46,5 cm	19 L	91	1

CSR3 Shown in Dark Taupe Height is approximate 18 cm from counter to spigot.



CSR5 Shown in Black

# Handwash Accessory – For Camtainers® & Ultra Camtainers®



Shown with 500LCD Camtainer®.

- Set up a Handwashing Station quickly and easily on or off premise.
- Convenient and economical way to meet health department hand washing requirements.
- Attaches to Camtainers® 250LCD, 500LCD or Ultra Camtainers® UC250, UC500.
- Includes four Handwash Only labels and an Easy Serve Dispenser lever.

**Handwash Accessory Stocking Colors:** Dark Brown (131), Black (110).

**Easy Serve Dispenser Color:** Black (110).

**Riser Colors:** See optional accessories with Camtainers.

**Pail with Bail Color:** White (148).

Handwash Accessory is covered by the following U.S. Patent D 506,634 S & D 506,899 S.



CODE	HWAPR	HWATD
<b>DESCRIPTION</b>	With paper towel roll holder	With Multi-Fold Paper Towel Dispenser
<b>FITS</b>	250LCD, 500LCD, UC250, UC500	250LCD, 500LCD, UC250, UC500

## Optional Accessories

CODE	DESCRIPTION
R500LCD	Riser
PWB22	Pail with Bail
LCDES	Easy Serve

## Optional Accessories



CODE	R500LCD	R1000LCD	LCDCH	LCDCH10	LCDES
<b>DESCRIPTION</b>	Riser	Riser	Condiment Holder	Condiment Holder	Easy Serve Dispenser
<b>EXTERIOR DIMENSIONS D x W x H</b>	41,5 x 23 x 12 cm	49,5 x 39 x 11,5 cm	42 x 22 x 13 cm	51 x 41 x 12 cm	—
<b>FITS</b>	250LCD, 500LCD, UC250, UC500	1000LCD, UC1000	250LCD, 500LCD UC250, UC500	1000LCD, UC1000	LCD Spigots UC Spigots

**Case Pack: 1** Colors: Coffee Beige (157), Dark Brown (131), Black (110). **Easy Serve Color:** Black (110)

## Hydration Station

Cart with two 19 L beverage servers with covers can be used at full height with three shelves or at lower height with two shelves.



CODE	HYDRATIONPKG**
<b>DESCRIPTION</b>	1- KD Utility Cart, 2- 500LCD Beverage Servers, 2- Easy Serve Dispensers and 2- Black Personalized Beverage Server Covers stating "WATER"
<b>DIMENSIONS* W x D x H</b>	101,6 x 53,96 x 147,32 cm

**Case Pack: 1** Camtainer and Cover Color: Black (110).

\*Dimensions based on 3 shelf cart with Camtainers on top shelf.

\*\*Ships in 7 separate cartons.

With 2-shelf set-up, approximate distance from floor to spigot is 60 cm; with 3-shelf set-up: 94 cm.

# Beverage Service Carts

- Ideal for breakfast, coffee or snack service.
- Use top counter to hold Cambro Beverage Servers, Versa Organizer Bins or Display Trays with Covers for food.
- Store drinkware, additional food items or other supplies in open compartment.
- Insulated cabinets hold hot or cold food in full, ½ or ⅓ size food pans or on Cambro Metric Camtrays® (3253).

**Colors:** Slate Blue (401), Granite Grey (191), Granite Green (192).

See Organizer section for more information on Organizer Bins.

See Camtainer section for more information on Camtainers.

**Wire Rack Color:** Silver (000).

See Cold Pack section for more information on Cold Packs.

**15,2 cm Casters:** 2 fixed, 2 swivel, 1 with brake.

For complete specifications, call or write Cambro.



*Beverage Service Cart is designed to hold Beverage Containers at point of service only. A dolly or hand truck with safety strap is recommended for moving Beverage Containers over longer distances or uneven surfaces.*



MDC24F



MDC24 has recessed top that holds 3 each 3,8 Liters 100LCD Camtainers and stacked Condiment Bins & Wire Rack with 3253 trays.

CODE	EXTERIOR DIMENSIONS L x W x H	CASE PACK
MDC24	113 x 76 x 112 cm	1
MDC24F	113 x 76 x 112 cm	1
<b>OPTIONAL ACCESSORIES</b>		
<b>Organizer Bin</b>		
5412CBP	30,5 x 13 x 11 cm	12
<b>Camtainer®</b>		
100LCD	26,5 x 30 x 44 cm	1
<b>Wire Rack</b>		
MDC24R	58,4 x 43,2 x 35,5 cm	1
<b>Camchiller®</b>		
CP1220	53 x 33 x 3,8 cm	1

The use of racks in the MDC24 and MDC24F carts will allow the following configuration of pans or trays, per compartment:

DESCRIPTION	GN (⅓)	GN (½)	GN (⅔)
6,5 cm Pans	(4) 12CW	(8) 22CW	(12) 32CW
10 cm Pans	(3) 14CW	(6) 24CW	(9) 34CW
15 cm Pans	(2) 16CW	(4) 26CW	(6) 36CW
20 cm Pans	(1) 18CW**	(2) 28CW**	(3) 38CW**

\*\*With room for 6,5 cm or 10 cm pan above 15 cm pan. 10 each 3253 Metric Camtrays®.

### Compartment Dimensions

Shelf Compartment	W 96,5 cm	D 64 cm	H 25,4 cm
Holding Compartments	W 44,5 cm	D 60,3 cm	H 36 cm

Venting plug is covered by US Patent D 553,717 S.

### MDC24R Wire Rack

Wire Rack (sold separately) to organize pans and trays in the cart. Rack holds Full, ½ and ⅓ size Food Pans and 3253 trays. When placed in cart's core area, the rack allows room on either side of pan positions for Cambro's CP1220 Camchillers® one on each side.



# Insulated Top Loading Camcarriers® to Transport Gastronom Food Pans

- Top-loading food pan carriers hold, transport and serve a single full-size pan of hot or cold food.
- Sturdy and durable, seamless polyethylene or polypropylene with thick foam insulation.
- Molded-in handles on all four sides for easy carrying and handling.
- Use with divider bars to hold multiple fractional pans.
- Pans are easy to remove using finger notches.
- Carriers interlock and stack for transporting and storing.

**UPCS Colors:** Dark Brown (131), Speckled Grey (480), Coffee Beige (157), Black (110).

**MPC and MPCHL Colors:** Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Brick Red (402), Green (519), Black (110), Hot Red (158).

\* Polypropylene dough boxes are safe for use in high temperature dishwashers.

**UPC Colors:** Slate Blue (401), Dark Brown (131), Black (110), Granite Grey (191), Granite Green (192).

**Camdolly® Colors:** Coffee Beige (157), Dark Brown (131), Black (110), Slate Blue (401), Grey (180).

**Divider Bar Colors:** White (148), Clear (135).

See Food Pan Section for pricing and ordering information.

**Note:** Place food pans on rails. Pans should not be placed on the floor of a Camcart or Camcarrier® cavity.

**Note:** Best results will be achieved by loading food pans between 82° to 88°C. Loading metal food pans over 121°C may result in damage to the carrier or cart.



UPC & MPC Models

UPCS160



Stacking and storage reduced by 35%!

UPCS140

UPCS180

UPCS160

UPC140

UPC160

Shown with dividers and fractional sized food pans.

No divider bars available for UPC100.

## Hot

UPC160	87°C	85°C	83°C	81°C	79°C
UPCS160	87°C	85°C	83°C	81°C	79°C
UPCSS160	87°C	85°C	83°C	81°C	79°C

Starting Temperature    1 hr.    2 hrs.    3 hrs.    4 hrs.

## Cold

UPC160	0°C	1°C	2°C	2°C	2,5°C
UPCS160	0°C	1°C	2°C	2°C	2,5°C
UPCSS160	0°C	1°C	2°C	2°C	2,5°C

Starting Temperature    1 hr.    2 hrs.    3 hrs.    4 hrs.

## Camcarrier®

One-piece, seamless polyethylene construction, airtight removable gasket and sturdy plastic latches.



<b>CODE</b>	<b>240MPC</b>
<b>COMPARTMENT CAPACITY</b>	1 GN½ - 10 cm deep pan
<b>EXTERIOR DIMENSIONS W x D x H</b>	42 x 35 x 19 cm
<b>Case Pack:</b> 1 240MPC No Divider Bar.	

## S-Series

Durable polypropylene construction, built in seal and wide, nylon latches. Contemporary appearance and superior holding performance at an economical price.



CODE	UPCS140	UPCS160**	UPCS180	UPCSS160*
COMPARTMENT CAPACITY	1 GN $\frac{1}{2}$ - 10 cm deep pan	1 GN $\frac{1}{2}$ - 15 cm deep pan	1 GN $\frac{1}{2}$ - 20 cm deep pan	1 full size 15 cm deep pan
EXTERIOR DIMENSIONS W x D x H	64 x 43,5 x 22 cm	64 x 43,5 x 26 cm	64 x 43,5 x 30,5 cm	62,5 x 42 x 28 cm
FITS CAMDOLLY®	CD160	CD160	CD160	CD160

Case Pack: 1 \*UPCSS160 available in Dark Brown (131) and Coffee Beige (157). \*\*UPCS160 Cannot be used with Camchiller.  
Temperature Maintenance Tool for UPCSS160 Only: CP1220 and CP1210 Camchiller®

## Ultra Pan

One-piece, seamless polyethylene construction, airtight removable gasket and wide, nylon latches.



CODE	UPC140	UPC160	UPC180
COMPARTMENT CAPACITY	1 GN $\frac{1}{2}$ - 10 cm deep pan	1 GN $\frac{1}{2}$ - 15 cm deep pan	1 GN $\frac{1}{2}$ - 20 cm deep pan
EXTERIOR DIMENSIONS W x D x H	63 x 44 x 21 cm	63 x 44 x 26 cm	63 x 44 x 30,5 cm
FITS CAMDOLLY	CD100H, CD1826HB, CD160	CD100H, CD1826HB, CD160	CD100H, CD1826HB, CD160

Case Pack: 1

## 100 Series

Store and stack food pans or place food directly in compartment. The 100MPCHL model has a hinged serving lid.



CODE	100MPC	100MPCHL	UPC100
COMPARTMENT CAPACITY	3 GN $\frac{1}{2}$ - 6,5 cm deep pan or 2 GN $\frac{1}{2}$ - 10 cm deep pans or 1 GN $\frac{1}{2}$ - 15 or 20 cm deep pan	1 GN $\frac{1}{2}$ - 20 cm deep pan	3 GN $\frac{1}{2}$ - 6,5 cm deep pans or 2 GN $\frac{1}{2}$ - 10 cm deep pans or 1 GN $\frac{1}{2}$ - 15 cm or 20 cm deep pan
EXTERIOR DIMENSIONS INTERIOR DIMENSIONS W x D x H	68 x 45 x 38 cm 55 x 35 x 20,5 cm	68 x 45 x 39,5 cm 55 x 35 x 20,5 cm	68 x 46 x 40 cm 56,5 x 33 x 20,5 cm
BULK CAPACITY*	38 L	38 L	38 L
FITS CAMDOLLY	CD100H, CD1826MTC, CD100HB, CD1826MTCHB, CD100, CD2028	CD100, CD100H, CD100HB	CD100H, CD1826MTC, CD100HB, CD1826MTCHB, CD100, CD2028

Case Pack: 1 \* Without using food pans. 100MPC, 100MPCHL and UPC100 No Divider Bar.

## Accessories

CODE	OVERALL EXTERIOR DIMENSIONS	CASE PACK
Divider Bars for Food Pans		
DIV12	32,38 cm Length	3
DIV20	53,02 cm Length	3

\*Not for use in UPCSS1600.




# Camchiller®, Thermobarrier® and Camwarmer®



## Camchiller

- An easy-to-use, cold food holding temperature tool.
- Extend cold holding time or enhance safe holding below 5°C when frequent access is required.
- Freeze first then use to pre-chill cabinet before loading.

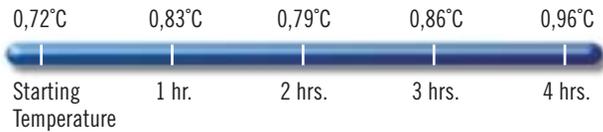

CODE	CP1220 (GN FULL SIZE)	CP1210 (GN HALF SIZE)	CP814 (20 x 36 CAMCHILLER)
<b>FITS INTO</b>	UPCSS160, 300MPC, 1318MTC, UPC400, UPC400SP, UPCS400, UPC600, UPC800, UPC800SP, UPC1200, UPC1600, CVC72, CVC724, all Combo Cart® Plus and CamKiosk*	300MPC, 1318MTC, UPC400, UPCS400, UPC400SP, UPC600, UPC800, UPC800SP, UPCS140, UPCS160, UPCS180, CVC724*, CVC72* and all CamKiosks*	12186CW, 12186P, 12189CW, 12189P, CVC724, CVC72, CVC55, and all CamKiosks*
<b>DIMENSIONS L x W x H</b>	53 x 33 x 3,8 cm	32,4 x 26,4 x 3,8 cm	35,56 x 20,32 x 3,8 cm
<b>QUANTITY PER CAVITY</b>	1 (*2 per cavity)	1 (*2 per top wells)	1

Case Pack: 1    Color: Cold Blue (159).    \*Top wells only.

## ThermoBarrier

- A highly valuable yet economical temperature maintenance tool for caterers.
- Use to minimize empty space and food temperature loss within a partially loaded compartment.



CODE	300DIV	400DIV	1200DIV	1600DIV
<b>FITS INTO</b>	300MPC, UPC600, 1318MTC	UPC400, UPC800, UPC400SP, UPCS400, UPC800SP	UPC1200, CVC72, CVC724	UPC1600, CamKiosk, UPC1600SP
<b>QUANTITY PER COMPARTMENT</b>	1	1	2	2
<b>DIM. L x W x H</b>	53 x 33 x 2,5 cm	54 x 33 x 3,8 cm	53 x 33,5 x 3,5 cm	53 x 33,5 x 3,8 cm
<b>COLOR</b>	Coffee Beige (157)	Grey (180)	Dark Brown (131)	Slate Blue (401)
<b>CASE PACK</b>	1	1	2	2



## Camwarmer

- Use for added insurance to keep hot foods hot during holding and transporting.
- Keep in cabinet with hot foods to extend holding time or enhance safe holding above 65°C when frequent access is required.



CODE	1210PW
<b>FITS INTO</b>	300MPC, 1318MTC, UPC400, UPCS400, UPC600, UPC800
<b>DIMENSIONS L x W x H</b>	34 x 27,5 x 4 cm
<b>CASE PACK</b>	1

Color: Granite Grey (191)



**UPC400 with Camwarmer.**  
Two Camwarmers recommended per cavity.




# Temperature Maintenance – Optimize Food Holding Performance

## Camchiller® – GN $\frac{1}{4}$ Size and GN $\frac{1}{2}$ Size

- Use to:
  - Pre-chill cabinet cavity.
  - Hold package food in food pan wells. (Half Size Only)
  - Maximize cold food holding.
  - Minimize open cavity space.
- Easy to use:
  1. Freeze 8 hours.
  2. Slide one or two on top rails and pre-chill cavity 15-20 minutes.
  3. Load in pans of pre-chilled food below Camchiller. (A)
  4. Move pans and Camchiller down as food is removed. (B)


### COLD HOLDING

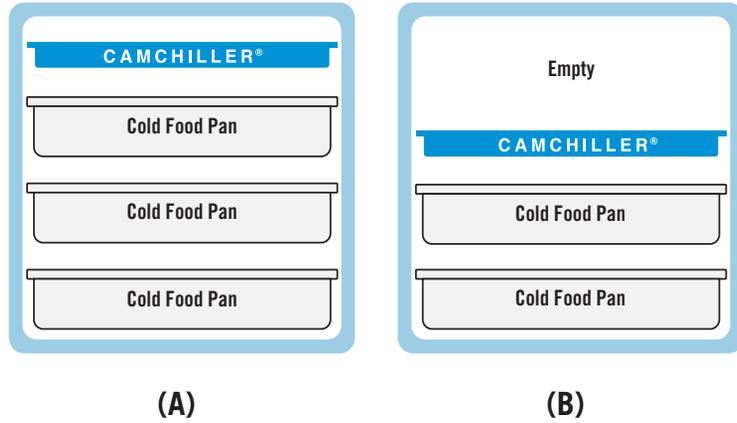

## ThermoBarrier® – GN $\frac{1}{4}$ Size

- Use to:
  - Hold hot and cold food in same cabinet cavity.
  - Minimize open cavity space.
- Easy to use:
  1. Slide between hot food on top and cold food on bottom. (A)
  2. Slide under hot food loaded in upper cavity space. (B)
  3. Slide above cold food loaded into lower cavity space. (C)


### HOT AND COLD HOLDING

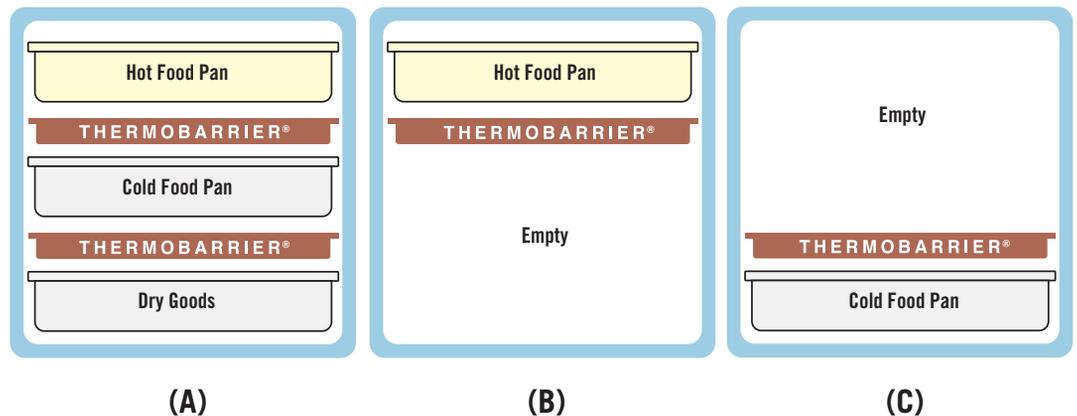

## Camwarmer® – GN $\frac{1}{2}$ Size

- Use to:
  - Pre-heat cabinet cavity.
  - Maximize hot food holding.
  - Minimize open cavity space.
- Easy to use:
  1. Heat in 180°C oven for 45 minutes.
  2. Slide two Camwarmers on bottom rails and pre-heat cavity 15-20 minutes. (or place on high heat food pan lid or sheet pan)
  3. Load in pans of pre-heated food above Camwarmers. (A)
  4. Move pans and Camwarmers up as food is removed. (B)

### HOT HOLDING

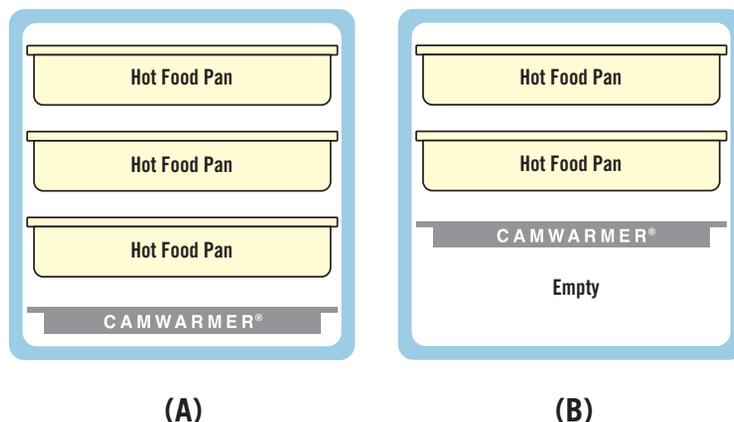

# Insulated Front Loading 300MPC and UPC400 to Transport Gastronom Food Pans

- Durable and dependable front-loading food pan carriers.
- Hold multiple pans of hot or cold food at safe temperatures for hours.
- Seamless polyethylene with thick foam insulation.
- Airtight removable gasket provides a secure seal.

**300MPC Colors:** Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Brick Red (402), Kentucky Green (519), Black (110), Hot Red (158).

**UPC400 Colors:** Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Black (110), Granite Grey (191), Granite Green (192), Granite Sand (194).

**▲ Camdolly Colors:** Slate Blue (401), Coffee Beige (157), Dark Brown (131), Black (110).

**Note:** Place food pans on rails. Pans should not be placed on the floor of a Camcarrier® cavity. Please use specified food pan sizes.

**Note:** Best results will be achieved by loading food pans between 82° to 88°C. Loading metal food pans over 121°C may result in damage to the carrier or cart.

See Food Pan section for pricing and ordering information.

UPC400 is covered by US Patent D 392,158.

Venting plug is covered by US Patent D 553,717 S.



## Hot

UPC400	87,8°C	85,6°C	84,5°C	82,8°C	81,7°C
300MPC	86°C	83°C	81°C	79°C	77°C



## Cold

UPC400	0,3°C	0,8°C	0,9°C	1,2°C	1,4°C
300MPC	1°C	1,5°C	2°C	2,5°C	3°C



UPC400 & CD400



300MPC



CODE	300MPC	UPC400 / UPC400SP**
EXTERIOR DIM. W x D x H	42,5 x 62 x 57 cm	46 x 63,3 x 62 cm
INTERIOR DIM. W* x D x H	34 x 53,5 x 36 cm	33,5 x 53,3 x 49 cm


Case Pack: 1 \* Rail to Rail \*\* Security Package (SP).

### HOLDING CAPACITY:

PAN DEPTH	NUMBER OF GN 1/2 PANS 300MPC	UPC400
6,5 cm	4	6
10 cm	3	4
15 cm	2	3
20 cm	1 +	2
	1 each 6,5 cm	

Also holds GN 1/2 and 1/3 size pans.

## Optional Accessories



CODE	1210PW	300DIV	400DIV	CP1220	CD300*	CD400	400STP
DESCRIPTION	Camwarmer®	ThermoBarrier®	ThermoBarrier	Camchiller®	Camdolly®	Camdolly	Strap
EXTERIOR DIM. (CM)	34,9 x 27,6 x 4	53 x 33 x 2,5	54 x 33 x 3,8	53 x 33 x 3,8	49 x 65 x 26,5	71 x 53 x 23	500 Long
INTERIOR DIM. (CM)	—	—	—	—	43 x 59	63,5 x 46	—
COLOR	Granite Grey (191)	Coffee Beige (157)	Grey (180)	Cold Blue (159)	▲	▲	Beige (000)

Case Pack: 1 \* Also available CD300H and CD300HB. See Camdolly section.

# UPCS400 Ultra Pan Carrier® S-Series to Transport Gastronom Food Pans

- Ultra dependable, ultra durable front-loading pan carrier.
- Holds multiple pans of hot or cold food for hours.
- Durable polyethylene shell and thick, polyurethane foam insulation.

◇ **UPCS400 Colors:** Slate Blue (401), Speckled Grey (480), Dark Brown (131).



▲ **CD400 Colors:** Coffee Beige (157), Dark Brown (131), Black (110), Slate Blue (401).

**Casters:** 12,7 cm 2 fixed, 2 swivel, 1 with brake.

**Note:** Best results will be achieved by loading food pans between 82° to 88°C. Loading metal food pans over 121°C may result in damage to the carrier or cart.



Stacks with both UPCS400. Fits on CD400 Camdolly, or optional casters may be added for smooth ground transport.

HOLDING CAPACITY:	
PAN DEPTH	NUMBER OF GN 1/2 PANS
6,5 cm	6
10 cm	4
15 cm	3
20 cm	2

Also holds GN 1/2 and 1/3 size pans.



## EASY CONTENT AND ROUTING LABELING

Menu clip reduces need to open door.

## CONVENIENT

Integrated pan-staging area eases service (not for use during transport).

## EASY TO CLEAN

Door removes for easy cleaning.



## ERGONOMIC DESIGN

Unbreakable, ergonomic, molded-in handles for comfortable two-person carrying.

## TEMPERATURE RETENTION

Polyurethane insulation keeps hot food hot and cold food cold.



## QUICK ACCESS

Single, 23 cm nylon latch for quick and secure opening and closing.




## PRESSURE CONTROL

Built-in vent equalizes pressure and releases steam.


## BUILT-IN SEAL

Built-in seal eliminates need for removable gasket.

## Hot

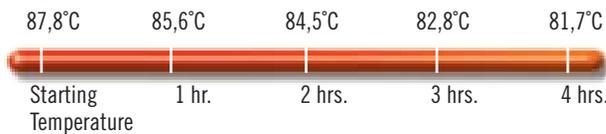

## Cold

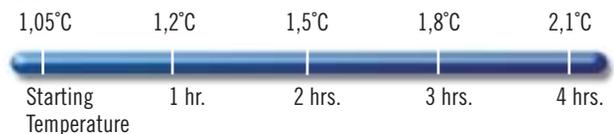

CODE	UPCS400	UPCS400CK	1210PW	400DIV	CP1220	CD400	400STP
DESCRIPTION	Insulated Carrier	Caster Kit*	Camwarmer®	ThermoBarrier	Camchiller	Camdolly®	Strap
EXTERIOR DIM. (CM)	63,5 x 46 x 63	∅ 12,7	34,9 x 27,6 x 4	54 x 33 x 3,8	53 x 33 x 3,8	71 x 53 x 23	500 cm Long
INTERIOR DIM. (CM)	53,5 x 33,5 x 48,6	—	—	—	—	63,5 x 46	—
COLOR	◇	—	Granite Grey (191)	Grey (180)	Cold Blue (159)	▲	Beige (000)

Case Pack: 1 \*Optional Caster Kit: 2 fixed, 2 swivel, 1 w/ brake.

# Ultra Camcarts® to Transport Gastronom Food Pans



- Double-compartment, high-capacity carts hold and transport hot or cold food.
- Tough, polyethylene shell and thick foam insulation throughout cabinet and between compartments.
- Airtight removable gaskets maintain safe food temperatures for hours.
- Easy to maintain and won't dent, crack, rust, chip or break.
- Durable nylon door latches open easily and close securely.
- Full-swing doors open to the side of the cart for easy loading and unloading.
- Molded-in handles ensure easy maneuvering.
- Molded-in bumpers minimize damage to walls, furniture and other equipment.

**Colors:** Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Brick Red (402), Green (519), Black (110), Hot Red (158), Granite Grey (191), Granite Green (192), Granite Sand (194).

**Note:** Place food pans on rails. Pans should not be placed on the floor of a Camcart cavity. Please use specified food pan sizes.

**Note:** Best results will be achieved by loading food pans between 82° to 88°C. Loading metal food pans over 121°C may result in damage to the carrier or cart.

Venting plug is covered by US Patent D 553,717 S.



Polyurethane insulation keeps hot food hot and cold food cold.



Shown with optional HD casters.

## Security Package (SP)

Specially designed for operations where safety and security are a top priority.

- Tamper resistant fasteners.
- Non-removable doors.
- Lockable hasp on each door. (padlocks not included)
- Heavy duty (HD) casters with chassis plates mounted with tamper resistant bolts.

*Marine rail is designed for use during service, not transport.*



TOTAL CART HOLDING CAPACITY	UPC600	UPC800	UPC1200	UPC1600
<b>Full Size Food Pans</b>				
6,5 cm deep	8 pans	12 pans	16 pans	24 pans
10 cm deep	6 pans	8 pans	12 pans	16 pans
15 cm deep	4 pans	6 pans	8 pans	12 pans
20 cm deep	2 pans + 2 each 10 cm pans	4 pans	4 pans	8 pans
<b>Camtray®</b>				
3253	12 trays	12 tray	12 trays	48 trays
2632	24 trays	48 trays	—	—
2025	—	—	12 trays	24 trays

See Food Pan and Camtray Section for ordering information.

\*Based on 3,8 cm spacing between trays.

## Hot

UPC600	86,8°C	84,3°C	82,5°C	80,8°C	79,3°C
UPC800	87,7°C	85,5°C	84,2°C	82,9°C	81,7°C
UPC1200	85,6°C	82,1°C	80,1°C	78,3°C	77,2°C
UPC1600	87,1°C	85,9°C	85,1°C	84,3°C	83,7°C



Starting Temperature 1 hr. 2 hrs. 3 hrs. 4 hrs.

## Cold

UPC600	0,6°C	1,1°C	1,4°C	1,8°C	2,1°C
UPC800	0,3°C	0,8°C	0,9°C	1,2°C	1,4°C
UPC1200	0,5°C	0,9°C	1,1°C	1,3°C	1,4°C
UPC1600	0,6°C	1,0°C	1,2°C	1,5°C	1,5°C



Starting Temperature 1 hr. 2 hrs. 3 hrs. 4 hrs.



## UPC600

<b>CODE</b>	<b>UPC600</b>
<b>DESCRIPTION</b>	Base Model
<b>EXTERIOR DIM. W x D x H</b>	52 x 69 x 114,5 cm
<b>COMPARTMENT DIMENSIONS</b>	34 x 54 x 35,5 cm
<b>Case Pack:</b>	1 Casters: 12,7 cm, 2 fixed, 2 swivel, 1 with brake.



## UPC800

<b>CODE</b>	<b>UPC800</b>	<b>UPC800SP</b>
<b>DESCRIPTION</b>	Base Model	Security Package
<b>EXTERIOR DIM. W x D x H</b>	52 x 69 x 137 cm	52 x 69 x 137 cm
<b>COMPARTMENT DIMENSIONS</b>	33 x 54,5 x 48,5 cm	33 x 54,5 x 48,5 cm
<b>Case Pack:</b>	1 Casters: 15,2 cm, 2 fixed, 2 swivel, 1 with brake. Heavy Duty (HD) Casters: 15,2 x 3,8 cm, 2 fixed, 2 swivel with brake casters.	



## UPC1200

<b>CODE</b>	<b>UPC1200</b>
<b>DESCRIPTION</b>	Base Model
<b>EXTERIOR DIM. W x D x H</b>	72,5 x 82 x 116 cm
<b>COMPARTMENT DIMENSIONS</b>	54 x 66,5 x 34,5 cm
<b>Case Pack:</b>	1 Casters: 15,2 cm, 2 fixed, 2 swivel, 1 with brake.




## UPC1600

<b>CODE</b>	<b>UPC1600</b>	<b>UPC1600HD</b>	<b>*UPC1600SP</b>	<b>UPCGL1600SP</b>
<b>DESCRIPTION</b>	Base Model	Base Model with HD Casters	Security Package	Security Package, Gasketless
<b>EXTERIOR DIM. W x D x H</b>	71,5 x 82 x 135 cm	73 x 84,7 x 138,4 cm	71,5 x 82 x 135 cm	71,5 x 82 x 135 cm
<b>COMPARTMENT DIMENSIONS</b>	53,5 x 66,5 x 53,5 cm	53,5 x 66,5 x 53,5 cm	53,5 x 66,5 x 53,5 cm	53,5 x 66,5 x 53,5 cm

**Case Pack:** 1 Casters: 15,2 cm, 2 fixed, 2 swivel, 1 with brake.  
**Heavy Duty (HD) Casters:** 15,2 x 5,08 cm 2 fixed, 2 swivel with brake casters.  
 \*Security Package (SP) have lock-in hinge pins and latches and wheels are attached with tamper resistant screws.



## Optional Accessories



<b>CODE</b>	<b>300DIV</b>	<b>400DIV</b>	<b>1200DIV</b>	<b>1600DIV</b>	<b>CP1220</b>	<b>1210PW</b>
<b>DESCRIPTION</b>	ThermoBarrier®	ThermoBarrier	ThermoBarrier	ThermoBarrier	Camchiller®	Camwarmer®
<b>EXTERIOR DIMENSIONS</b>	<b>L x W x H</b> 53 x 33 x 2,5 cm	<b>L x W x H</b> 54 x 33 x 2,5 cm	<b>L x W x H</b> 53 x 33,5 x 3,5 cm	<b>L x W x H</b> 53 x 33,5 x 3,8 cm	<b>L x W x H</b> 53 x 33 x 3,8 cm	<b>L x W x H</b> 34 x 27,5 x 4 cm
<b>FITS</b>	UPC600	UPC800, UPC800SP	UPC1200	UPC1600	UPC600, UPC800, UPC800SP, UPC1200, UPC1600, UPC1600SP	UPC600, UPC800, UPC800SP
<b>COLOR</b>	Coffee Beige (157)	Grey (180)	Dark Brown (131)	Slate Blue (401)	Cold Blue (159)	Granite Grey (191)


**Case Pack:** 1 1200DIV / 1600DIV Case Pack: 2

# Transporter Capacity Guide


## Loading Examples for Cambro® Insulated Transporters

### TOP LOADERS

UPC140-UPC180  
UPCS140-UPCS180  
UPCSS160





For a 3-course meal:  
2 x GN 1/4  
1 x GN 1/2  
1 DIV12 divider bar  
(approx. 14 meals)



For a 4-course meal:  
2 x GN 1/6  
2 x GN 1/3  
2 DIV12 divider bars  
(approx. 14 meals)





### TOP LOADERS

100 series  
100MPC  
UPC100







### FRONT LOADERS

300MPC  
UPC600 (x2)  
UPC1200 (x4)




### FRONT LOADERS


UPC400  
UPCS400  
UPCH400(2)  
UPC800 (x2)  
UPCH800(2) (x2)  
UPC1600 (x4)  
UPCH1600(2) (x4)

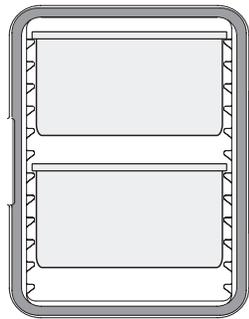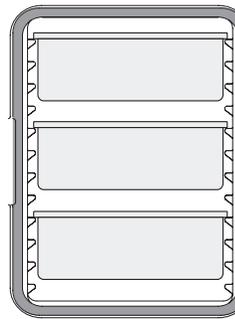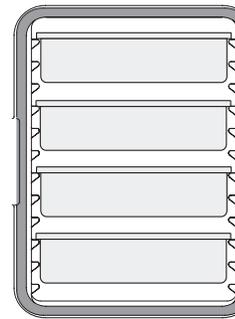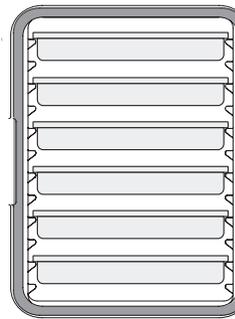


### CAMCARRIERS® AND CAMCARTS® FOR SHEET PANS




1318MTC  
8 x 1/2 size  
sheet pans




1826MTC  
6 x full-size  
sheet pans  
1826DTC (x4)

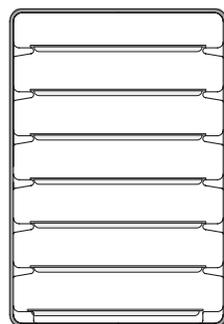

1826LTC3  
7 x full-size  
sheet pans

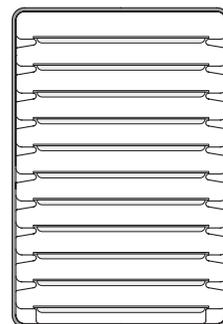


Camtherm Low  
11 x full-size  
sheet pans  
Camtherm Tall (x2)

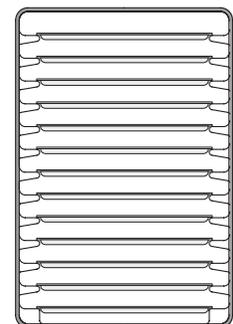

1826LTC  
13 x full-size  
sheet pans

### SUMMARY OF GN CONTAINER SIZES

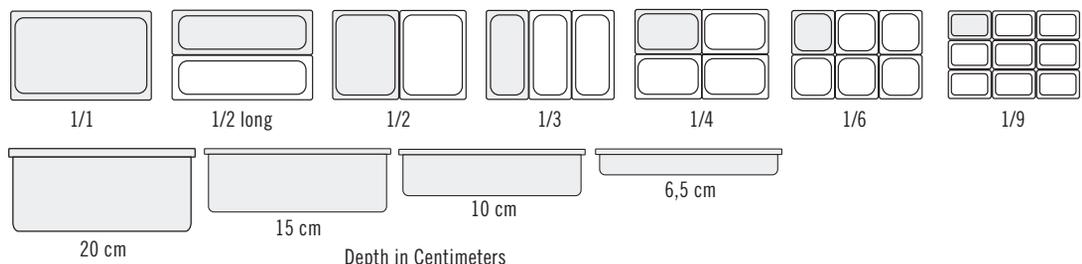

# Ultra Pan Carrier® and Ultra Camcart® H-Series

- Designed for both electric hot holding and non-electric transport.
- Gentle, 65° to 74°C non-radiant heat will not cook food and maintains food moisture.
- Holds a wide variety of foods such as pasta, bone-in fried chicken, and double-crustured pies.
- One hour preheat time from room temperature and three minute recovery.
- Energy consumption is substantially less than comparable metal cabinets.
- Will not rust or dent like metal cabinets, is more economical, and is easy to maneuver.
- All UPCH models have been tested to maintain safe, hot food temperatures, for up to 4 hours when unplugged.
- Models with only the top heated door offer unique versatility with an electric hot holding cabinet on top and passive hot or cold food holding on the bottom.
- Heated door kits also sold separately to retrofit UPC400, UPC800 and UPC1600.

**Colors:** Granite Gray (191), Black (110), Granite Green (192), Slate Blue (401), Dark Brown (131).

**Casters:** 15,2 cm 2 fixed, 2 swivel, 1 with brake.



## Power On and Heat on Indicators

Communicate the Power and Heating status of the UPCH1600 unit. Know instantly when the compartment has reached target temperature.



## Vents

Consistent heating throughout the compartment is generated by vents that constantly circulate heat from front to back.



## Tough Exterior

All UPCH units are made of tough, polyethylene with polyurethane foam insulation to keep heat in while keeping the exterior cool to the touch. Will not crack, dent, chip, rust or break.



## Insulation

CFC-free, foamed-in place polyurethane foam insulation will hold temperature above 64°C for up to 4 hours when used unplugged.

# Ultra Pan Carrier® and Ultra Camcart® H-Series

Marine rail is designed for use during service, not transport.



MODEL	UPCH400/ UPCH800 (110 VAC MODELS)	UPCH4002/ UPCH8002 (220 VAC MODELS)	UPCH1600 (110 VAC MODELS)	UPCH16002 (220 VAC MODELS)
<b>Electrical Specifications</b>				
Required Voltage	110 - 120 VAC	200 - 230 VAC	110 - 125 VAC	200 - 230 VAC
Maximum Amp.	2,0a	1,2a	4,6a	2,3a
Watts	230w	265w	529	506w
Hertz	50/60	50/60	50/60	50/60
Plug Type	Nema 5-15P	Euro plug, CEE7	5-15P to C15RA	CEE7/7 to C15RA
Power Cord Length	2,7 m	2,7 m	2,7 m	2,7 m

## Hot Holding When Unplugged



## HOT HOLDING

65° — 74°C

## WARM UP TIME

(from ambient to temperature)

1 hour

## RECOVERY TIME\*

(time to recover to temperature after door is held open for 30 seconds)

3 minutes

## TRANSPORT TIME\*


(after reaching temperature, amount of time unit can be held passively/unplugged until contents reach 65°C.)

4 hours+

\*Based on test with 6 each, 15,24 cm deep H-pans with GripLids® filled with approx 14,2 L of 87,7°C water. (Temperatures are of the water not the air in the cart).

## Capacity Guide

UPCH4002  
UPCH8002 (x2)  
UPCH16002 (x4)

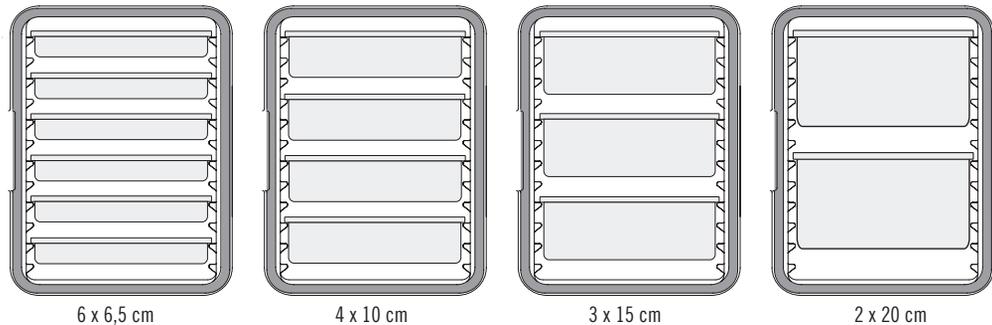

## Food Pan Portion Guide

### GN 1/3 Food Pan

Depth:	20 cm	15 cm	10 cm	6,5 cm
Serving Portions Per Pan (1 cup):	80	60	40	30

# Ultra Pan Carrier® and Ultra Camcarts® H-Series

- Enables HACCP compliance by maintaining safe, hot food temperatures.
- UPCH400(2) models stack for storage or transporting on a Camdolly® with securing strap.

**Colors:** Granite Grey (191), Granite Green (192), Slate Blue (401), Black (110), Dark Brown (131).

**CD400 Colors:** Coffee Beige (157), Dark Brown (131), Black (110), Slate Blue (401), Grey (180).

**Casters:** 15,2 cm 2 fixed, 2 swivel, 1 with brake.

**Note:** If using metal food pans, cool to 120°C before placing onto rails.

**Note:** Place food pans on rails. Pans should not be placed on the floor of a Camcart cavity. Please use specified food pan sizes.

Vent Cap Patent Pending.



## Security Package (SP)

Specially designed for operations where safety and security are a top priority.

- Tamper-resistant fasteners.
- Non-removable doors.
- Lockable hasp on each door (padlocks not included).
- Heavy duty (HD) casters with chassis plates mounted with tamper-resistant bolts.

CODE	DESCRIPTION	EXTERIOR DIMENSIONS W x D x H	COMPARTMENT DIMENSIONS W x D x H
UPCH1600SP	110V, Both doors heated	73 x 84,7 x 138,4 cm	53,5 x 66,5 x 53,5 cm
UPCH16002SP	220V, Both doors heated	73 x 84,7 x 138,4 cm	53,5 x 66,5 x 53,5 cm

CODE	DESCRIPTION	EXTERIOR DIMENSIONS W x D x H	COMPARTMENT DIMENSIONS W x D x H
<b>1-Compartment Ultra Pan Carriers</b>			
<b>110V</b>			
UPCH400	No casters	46 x 67 x 63 cm	33,5 x 53,3 x 48,6 cm
UPCHW400	With casters	46 x 67 x 79,4 cm	33,5 x 53,3 x 48,6 cm
<b>220V</b>			
UPCH4002	No casters	46 x 67 x 63 cm	33,5 x 53,3 x 48,6 cm
UPCHW4002	With casters	46 x 67 x 79,4 cm	33,5 x 53,3 x 48,6 cm
<b>2-Compartment Ultra Camcarts</b>			
<b>110V</b>			
UPCH800	Both doors heated	52 x 69 x 137,2 cm	33 x 54,5 x 48,5 cm
UPCHT800	Top door heated only	52 x 69 x 137,2 cm	33 x 54,5 x 48,5 cm
UPCH1600	Both doors heated	73 x 84,7 x 137,5 cm	53,5 x 66,5 x 53,5 cm
UPCH1600HD	Both doors heated, HD casters	73 x 84,7 x 138,4 cm	53,5 x 66,5 x 53,5 cm
UPCHT1600	Top door heated only	73 x 84,7 x 137,5 cm	53,5 x 66,5 x 53,5 cm
UPCHT1600HD	Top door heated only, HD casters	73 x 84,7 x 138,4 cm	53,5 x 66,5 x 53,5 cm
<b>220V</b>			
UPCH8002	Both doors heated	52 x 69 x 137,2 cm	33 x 54,5 x 48,5 cm
UPCHT8002	Top door heated only	52 x 69 x 137,2 cm	33 x 54,5 x 48,5 cm
UPCH16002	Both doors heated	73 x 84,7 x 137,5 cm	53,5 x 66,5 x 53,5 cm
UPCH16002HD	Both doors heated, HD casters	73 x 84,7 x 138,4 cm	53,5 x 66,5 x 53,5 cm
UPCHT16002	Top door heated only	73 x 84,7 x 137,5 cm	53,5 x 66,5 x 53,5 cm
UPCHT16002HD	Top door heated only, HD casters	73 x 84,7 x 138,4 cm	53,5 x 66,5 x 53,5 cm
<b>Accessories</b>			
CD400	Camdolly®	53 x 70 x 23 cm	—
400STP	Strap	5 m long	—

**UPCH Case Pack:** 1

**Also Available:** Top and Bottom Replacement/Retrofit Doors for 110V and 220V (non-interchangeable).

**Standard Casters:** 15,2 cm x 3,2 cm – 2 fixed, 2 swivel, 1 with brake. **Heavy Duty (HD) Casters:** 15,2 x 5 cm – 2 fixed, 2 swivel with brake.

# Combo Cart® Plus (Non-Electric)



- The most versatile insulated transporter on the market! Holds food pans, sheet pans, trays and even large pizza boxes.
- Two separate compartments offer the flexibility of holding either hot or cold food.
- Tough, durable polyethylene exterior will not dent, rust or chip—a great alternative to metal holding carts!
- Thick, CFC-free polyurethane insulation throughout the cabinet ensures excellent food quality and temperature retention for 4 or more hours.
- Ideal for caterers, schools, hotels and large institutions.

**Color:** Charcoal Gray (615).

**Note:** Place food pans on rails. Pans should not be placed on the floor of the compartment. All food should be cooled to 121,11°C before placing into cart to avoid damage to the body.

Tall Combo Cart Plus Non-Electric covered by U.S. Patent D 679,468 S.



**STAINLESS STEEL UNIVERSAL RAILS\***  
Holds sheet pans, food pans, pizza boxes and trays (or limitless combinations of these!)

\*7 pairs/compartment

**GASKET-FREE DOOR**  
Worry free door! Swings open completely to the side.

**MENU POCKET**  
Allows for easy product ID with either an index card or by writing directly onto smooth surface with a grease pencil.



**MARINE RAILING**  
Creates a bonus staging area for food pans.



**ERGONOMIC VERTICAL MOLDED-IN HANDLES**  
Will never break; great for maneuvering by operators of all heights.

**WIDE PADDLE LATCHES**  
For easy opening and closing.



**PERIMETER BUMPER**  
Protects cart and walls.

**CASTERS\*\***  
All swivel with brakes for smooth positioning and navigation; non-marking.

\*\*Standard or Heavy Duty (HD) casters available.

**INSULATION**  
CFC-free, polyurethane insulation throughout the body and doors maximizes heat or cold retention for 4 hours or more.

# Combo Cart® Plus (Non-Electric)

CODE	CASTER TYPE	UNIT WEIGHT (KG)
<b>Low</b>		
CMBPL	Standard Casters	52,6
CMBPLHD	HD Casters	56,9
<b>Tall</b>		
CMBP	Standard Casters	95,3
CMBPHD	HD Casters	99,6
<b>Security Package</b>		
CMBPLSP	Low, Standard Casters	53,0
CMBPLSPHD	Low, HD Casters	57,3
CMBPSP	Tall, Standard Casters	95,7
CMBPSPHD	Tall, HD Casters	100,0

**Standard Caster:** 15 x 3,2 cm  
(all swivel, with brakes)

**Heavy Duty Caster (HD):** 15 x 5 cm  
(all swivel, with brakes)

**Exterior Dimensions (Low)**

**W x D x H:** 70,2 x 85,1 x 104,5 cm

**Exterior Dimensions (Tall)**

**W x D x H:** 70,2 x 85,1 x 167,3 cm

**Compartment Dimensions with column rails (W x D x H):** 53,7 x 66,7 x 64,8 cm

**Case Pack:** 1 **Color:** Charcoal Gray (615).

## Security Package (SP)

Specially designed for operations where safety and security are a top priority.

- Tamper-resistant fasteners secure latches and rail columns.
- Cross-locking wires behind columns lock rails in place.
- Non-removable doors.
- Lockable hasp on each door. (padlocks not included)
- Heavy duty (HD) casters mounted with tamper resistant bolts.

## Optional Accessories

CODE	DESCRIPTION
CMBPR1	1 Pair of Rails
CMBPR7	7 Pairs of Rails

**Case Pack:** 1 **Color:** (000).



## Holding Capacity Reference

TYPE OF CONTAINER	STANDARD CAPACITY	RAIL SPACING	MAXIMUM CAPACITY	RAIL SPACING
45,7 x 66 CM FULL SIZE SHEET PANS	14	8,6 cm	32*	3,8 cm
33 x 5,7 CM FULL SIZE SHEET PANS	28	8,6 cm	64*	3,8 cm
GN ¼ 6,5 CM DEEP HOTEL PANS	28	8,6 cm	28	8,6 cm
GN ¼ 10 CM DEEP HOTEL PANS	20**	12,7 cm	20	12,7 cm
40 x 60 CM TRAYS	14	8,6 cm	32*	3,8 cm
32,5 x 53 CM TRAYS	28	8,6 cm	52*	4,8 cm
40,6 x 40,6 x 5,1 CM PIZZA BOXES	14	8,6 cm	22	5,7 cm

\* Additional rails required.

\*\* Only requires 5 pairs of rails.

# Combo Cart® Plus (Electric)



- The most versatile insulated transporter on the market! Holds food pans, sheet pans, trays and even large pizza boxes.
- Two separate compartments offer the flexibility of holding either hot or cold food by simply keeping it unplugged.
- Tough, durable polyethylene exterior will not dent, rust or chip and remains cool to the touch during operation—a great alternative to metal holding carts!
- Thick, CFC-free polyurethane insulation throughout the cabinet ensures excellent food quality and

temperature retention for 4 hours or more, even when unplugged.

- Over 55% more energy-efficient, on average, than leading metal carts.
- Ideal for caterers, schools, hotels and large institutions.

**Color:** Charcoal Gray (615).

**Note:** Place food pans on rails. Pans should not be placed on the floor of the compartment. All food should be cooled to 121,11°C before placing into cart to avoid damage to the body.

Tall Combo Cart Plus Electric covered by U.S. Patent D 679,468 S.



### GASKET-FREE DOOR

Worry free door! Swings open completely to the side.

### MARINE RAILING

Creates a bonus staging area for food pans.



### ERGONOMIC VERTICAL MOLDED-IN HANDLES

Will never break; great for maneuvering by operators of all heights.

### STAINLESS STEEL UNIVERSAL RAILS\*

Holds sheet pans, food pans, pizza boxes and trays (or limitless combinations of these!)

\*7 pairs/compartment

### ENERGY-SAVING HEATER

Tall cart - over 55% more energy efficient compared to leading metal carts, low carts - over 180%! Gentle, non-radiant heat circulates consistently from front to back of the cabinet.

### SOLAR DIGITAL THERMOMETER

Monitor internal cabinet temperature at a glance.

### POWER ON AND HEAT ON INDICATORS

Communicate the power and heating status of the unit. Know instantly when the compartment has reached target temperature. Turn on and off without unplugging the cord.

### WIDE PADDLE LATCHES

For easy opening and closing.



### PERIMETER BUMPER

Protects cart and walls.



### INSULATION

CFC-free, polyurethane insulation throughout the body and doors maximizes heat or cold retention for 4 hours or more.

### CASTERS\*\*

All swivel with brakes for smooth positioning and navigation; non-marking.

\*\*Standard or Heavy Duty (HD) casters available.

### CORD KEEPER

Stores 2,7 m power cord neatly and safely.

### MENU POCKET

Allows for easy product ID with either an index card or by writing directly onto smooth surface with a grease pencil.

# Combo Cart® Plus (Electric)

CODE	DESCRIPTION	UNIT WEIGHT (KG)
<b>Low</b>		
CMBPLH / CMBPLH2	Standard casters, 110V/220V	58,3
CMBPLHHD / CMBPLH2HD	HD casters, 110V/220V	62,6
<b>Tall</b>		
CMBPH / CMBPH2	Standard casters, 110V/220V	105,2
CMBPHHD / CMBPH2HD	HD casters, 110V/220V	109,5
<b>Top Door Heated Only</b>		
CMBPTH / CMBPTH2	Top Door Heated only, Standard casters, 110V/220V	104,6
CMBPTHHD / CMBPTH2HD	Top Door Heated only, HD casters, 110V/220V	108,9
<b>Security Package</b>		
CMBPLHSP	Low, Standard casters, 110V	58,6
CMBPLHSPHD	Low, HD casters, 110V	63
CMBPHSP	Tall, Standard casters, 110V	105,7
CMBPHSPHD	Tall, HD casters, 110V	110
CMBPTHSP	Top Door Heated only, Standard casters, 110V	105
CMBPTHSPHD	Top Door Heated only, HD casters, 110V	109,3

Case Pack: 1 Color: Charcoal Gray (615).

**Standard Caster:** 15 x 3,2 cm  
(all swivel, with brakes)

**Heavy Duty Caster (HD):** 15 x 5 cm  
(all swivel, with brakes)

**Exterior Dimensions (Low)**  
**W x D x H:** 70,2 x 85,1 x 104,5 cm

**Exterior Dimensions (Tall)**  
**W x D x H:** 70,2 x 85,1 x 167,3 cm

**Compartment Dimensions with column rails (W x D x H):** 53,7 x 66,7 x 64,8 cm

**55% more energy efficient**  
than leading metal cabinets

## Security Package (SP)

Specially designed for operations where safety and security are a top priority.

- Tamper-resistant fasteners secure latches and rail columns.
- Cross-locking wires behind columns lock rails in place.
- Non-removable doors.
- Lockable hasp on each door. (padlocks not included)
- Heavy duty (HD) casters mounted with tamper resistant bolts.

## Optional Accessories

CODE	DESCRIPTION
CMBPR1	1 Pair of Rails
CMBPR7	7 Pairs of Rails

Case Pack: 1 Color: (000).

## Electrical Specifications (Per Compartment)

	110V MODELS	220V MODELS
REQUIRED VOLTAGE	100-125 VAC	200-230 VAC
MAXIMUM AMP	4,6a	2,3a
WATTS	529w	506w
HERTZ	50/60	50/60
PHASE	Single	Single
PLUG TYPES	5-15 to C15RA	CEE7/7 to C15RA
ALTERNATE PLUG TYPES FOR INTERNATIONAL	JIS8303 to C15RA (Japan)	BS1363 to C15RA (UK / Ireland+more)
POWER CORD LENGTH	2,7 m	2,7 m

## Holding Capacity Reference

TYPE OF CONTAINER	STANDARD CAPACITY	RAIL SPACING	MAXIMUM CAPACITY	RAIL SPACING
45,7 x 66 CM FULL SIZE SHEET PANS	14	8,6 cm	32*	3,8 cm
33 x 5,7 CM FULL SIZE SHEET PANS	28	8,6 cm	64*	3,8 cm
GN ¼ 6,5 CM DEEP HOTEL PANS	28	8,6 cm	28	8,6 cm
GN ¼ 10 CM DEEP HOTEL PANS	20**	12,7 cm	20	12,7 cm
40 x 60 CM TRAYS	14	8,6 cm	32*	3,8 cm
32,5 x 53 CM TRAYS	28	8,6 cm	52*	4,8 cm
40,6 x 40,6 x 5,1 CM PIZZA BOXES	14	8,6 cm	22	5,7 cm

\* Additional rails required.

\*\* Only requires 5 pairs of rails.



# Camtherm® Electric Food Holding Cabinets

Camtherm Food Holding Cabinets hold and transport hot or cold food within the kitchen, on the truck, or at the point of delivery or service. Expand your kitchen capacity, maximize productivity, and hold food

safely for hours. Enjoy the confidence of knowing moist food will stay moist and crisp food will stay crisp.

Discover how one cabinet can do the work of two : with the flip of a switch, go from hot to cold or cold

to hot to increase your storage capabilities and menu flexibility.

Each cabinet combines extreme durability and excellent insulated holding performance with simple, energy-efficient thermoelectric

heating and cooling with :

- **NO COMPRESSOR**
- **NO HEATING COIL**
- **NO HUMIDIFIER**



Low Units

## Features & benefits available in both LOW and TALL profile Camtherm carts.

Top marine rail on all units holds 2 full-size food pans, one sheet pan or one cutting board (CB1220).

Solar powered, digital display thermometer monitors internal cabinet temperature.

Self-ventilating cap on each cabinet door automatically releases steam and equalizes pressure, maintaining food quality.

Menu clip holds routing directions or list of cabinet contents.

Non-marking, high modulus, rubber casters are strong and extremely durable providing smooth transport of full cabinets from kitchen to serving location.

Cabinet exterior stays cool during operation.

Doors swing open 270° for easy loading.

Aluminum louvers gently and evenly direct hot or cold air around the entire cabinet and contents, eliminating hot or cold spots and maintaining food quality.

Knuckle door hinges are built to withstand the rigors of numerous door openings. Doors lift up and off the hinges easily for cleaning.

Easy-to-use control panel is located on back of each unit. Includes on/off switch, hot/cold switch for hot/cold units only and a temperature control dial for hot only. Cold performing units are factory set to chill cabinet down to 2,8°C.

Molded-in bumpers protect walls and furniture and will never dent, chip or rust.



Ergonomic molded-in handles are at a safe height on both low and tall profile units for easy transporting, even when fully loaded.

Heavy-duty, 14 gauge electrical cord is 274 cm long. Wrapping hook is located on back of each cabinet for safe cord storage.

Wide, nylon door latches and magnetic door gaskets lock doors securely and create a tight seal to retain safe hot or cold food temperatures.

See caster information on following page.

Cabinet exterior stays cool during operation.

Doors swing open 270° for easy loading.

Aluminum louvers gently and evenly direct hot or cold air around the entire cabinet and contents, eliminating hot or cold spots and maintaining food quality.


Knuckle door hinges are built to withstand the rigors of numerous door openings. Doors lift up and off the hinges easily for cleaning.

Easy-to-use control panel is located on back of each unit. Includes on/off switch, hot/cold switch for hot/cold units only and a temperature control dial for hot only. Cold performing units are factory set to chill cabinet down to 2,8°C.

Molded-in bumpers protect walls and furniture and will never dent, chip or rust.



Tough, one-piece, seamless double-wall polyethylene exterior is easy to clean and won't dent, crack, rust, chip or break.

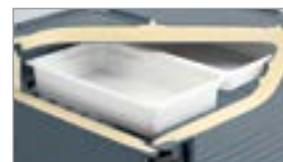

Polyurethane insulation keeps hot food hot and cold food cold during transport when unit is unplugged.

Anodized aluminum uprights and removable, adjustable chrome plated steel slide rails hold full-size food pans or sheet pans.

Energy efficient heating and/or cooling unit located on back of each cabinet. Low volt, low amp, low watt system maintains consistent hot or cold temperature and balanced humidity throughout the single cavity cabinet.

**Color:** Granite Grey (191), Granite Green (192), Granite Sand (194).  
**Cutting Board Color:** White (148).

Assembly is covered by U.S. Patent D 442,756 S & D 6,344,630. Venting plug is covered by US Patent D 553,717 S.

## HOLDING CAPACITY LOW PROFILE

Includes 6 rail sets




Sheet Pan **11 Each** 46 x 66 cm  
Requires five additional rail sets.

Full-Size GN 1/2 Food Pan - 32,5 x 53 cm

- 12 GN 1/2 6,5 cm Deep
- 8 GN 1/2 10 cm Deep
- 6 GN 1/2 15 cm Deep
- 4 GN 1/2 20 cm Deep

## HOLDING CAPACITY TALL PROFILE

Includes 12 rail sets



Sheet Pan **22 Each** 46 x 66 cm  
Requires ten additional rail sets.

Full-Size GN 1/2 Food Pan - 32,5 x 53 cm

- 24 GN 1/2 6,5 cm Deep
- 16 GN 1/2 10 cm Deep
- 12 GN 1/2 15 cm Deep
- 8 GN 1/2 20 cm Deep

# Camtherm® Electric Food Holding Cabinets



**50% more energy efficient** than leading metal cabinets

Model	Total Energy Consumption Over 8 Hours
Camtherm	2,06 kilowatt hours
Metal Cabinet	3,95 kilowatt hours

## ELECTRICAL SPECS

	LOW PROFILE	TALL PROFILE
Volts	110V	110V
Plug Type	Nema 5-15P	Nema 5-15P
Maximum amp draw	9,1 A	13,7 A
Amps run on	8,5 A	13,2 A
Watts	1100	1800
Hertz	50/60	50/60
Power input of heating unit	120 VAC	125 VAC

**Product Specs** CAD Drawings, Cut Sheets and User Manual  
Available at [www.cambro.com](http://www.cambro.com).

	CODE	THERMOMETER	CASTERS	UNIT WEIGHT KG
<b>LOW PROFILE</b>	EXTERIOR dimensions: W 78 x D 107 x H 108 cm			
	<b>Hot Only</b>			
	CMBH1826LC	Celsius	2 front 15,2 cm swivel w/brake, 2 rear 25,4 cm rigid	75 kg
	<b>Hot/Cold</b>			
	CMBHC1826LC	Celsius	2 front 15,2 cm swivel w/brake, 2 rear 25,4 cm rigid	101 kg
<b>Correctional security package (SP) available, please contact Cambro for information</b>				

	CODE	THERMOMETER	CASTERS	UNIT WEIGHT KG
<b>TALL PROFILE</b>	EXTERIOR dimensions: W 78 x D 100 x H 165 cm			
	<b>Hot Only</b>			
	CMBH1826TSC	Celsius	2 front 15,2 cm swivel w/brake, 2 rear 15,2 cm rigid	114 kg
	CMBH1826TBC	Celsius	2 front 15,2 cm swivel w/brake, 2 rear 25,4 cm rigid	116 kg
	<b>Hot/Cold</b>			
	CMBHC1826TSC	Celsius	2 front 15,2 cm swivel w/brake, 2 rear 15,2 cm rigid	148 kg
	CMBHC1826TBC	Celsius	2 front 15,2 cm swivel w/brake, 2 rear 25,4 cm rigid	150 kg
<b>Cabinet Colors:</b> Granite Grey (191), Granite Green (192), Granite Sand (194).				
<b>Correctional security package (SP) available, please contact Cambro for information</b>				

	CODE	DESCRIPTION	DIMENSIONS H x L x W	CASE PACK
<b>ACCESSORIES</b>	CMBR	Set of Slide Rails	51 x 12,2 cm	1 set of 2 Rails
	CB1220	Cutting Board	53,5 x 33,5 x 1,3 cm	1 each
<b>Cutting Board Color:</b> White (148).				

## Time & Temperature Performance

### HOT

#### WARM UP TIME

*From ambient to hot.*

#### RECOVERY TIME

*Time to recover to hot temperature after door is held open for 30 seconds.*

#### TRANSPORT TIME

*After reaching hot temperature, amount of time unit can be held passively / unplugged until temperature reaches (65°C).*



	(65°C)	(74°C)	(65°C)	(74°C)	(65°C)	(74°C)
<b>LOW</b>						
Hot Unit	33 minutes	45 minutes	2 minutes	4 minutes	5 hours	8 hours
Hot/Cold Unit	33 minutes	45 minutes	2 minutes	4 minutes	5 hours	8 hours
<b>TALL</b>						
Hot Unit	30 minutes	60 minutes	1 minute	3 minutes	4 hours	8 hours
Hot/Cold Unit	45 minutes	75 minutes	1 minute	3 minutes	6 hours	8 hours

All results based on tests with 6 full-size 15 cm deep H-Pans™ filled with 87,7°C hot water, covered and placed inside upper cabinet only.

### Cold

#### WARM UP TIME

*From ambient to cold.*

#### RECOVERY TIME

*Time to recover to hot temperature after door is held open for 30 seconds.*

#### TRANSPORT TIME

*After reaching cold temperature, amount of time unit can be held passively / unplugged until temperature reaches (65°C).*



	(2,8°C)	(2,8°C)	(2,8°C)
<b>LOW</b>			
Hot/Cold Unit	50 minutes	4 minutes	2 Hours
<b>TALL</b>			
Hot/Cold Unit	75 minutes	4 minutes	1 Hour

All results based on tests with 6 full-size GN ¼ 15 cm deep Polycarbonate Food Pans filled with 1,1°C cold water, covered and placed inside upper cabinet only. Vent Cap Patent Pending.

# Insulated Bakery Container – 60 X 40 cm



- Designed for the baking industry in Europe.
- Ideal for transporting products at safe cold temperatures to satellite locations.
- Perfect for baked items with cream fillings or frozen dough.
- Made with a durable polyethylene outer shell and thick polyurethane foam insulation.
- Holds sheet pans:
  - 60 x 40 cm
  - 58 x 40 cm
  - 58 x 20 cm
  - 58 x 10 cm
- or fiberglass tray:
  - 60 x 40 cm
- Choose between wire racks with 6 rails, 10 cm apart, or 7 rails, 8,7 cm apart.

**CP6040 color:** Cold Blue (159).

**Wire rack color:** Silver (000).

**Fiberglass Tray colors:**

Speckled Smoke (A20), Speckled Mocha (A21), Sahara (A22), Light Grey (A27), Pearl White (A33), Terrazzo (A86).

**Note:** Place sheet pans on rails. Pans should not be placed on the floor of a Container cavity. Please use specified sheet pan sizes.

Vent Cap Patent Pending.



Camdolly® CD300 makes it easy to transport BK60406 or BK60407.



CODE	BK60406*	BK60407*
<b>DESCRIPTION</b>	Container with 6 rails	Container with 7 rails
<b>EXT. DIM.</b>	57 x 76,5 x 82 cm	57 x 76,5 x 82 cm
<b>INT. DIM.</b>	42 x 63,5 x 67,5 cm	42 x 63,5 x 67,5 cm

**Case Pack:** 1 **Color:** Navy Blue (186) \* Includes 2 wireracks and 1 chiller.

## Accessories

CODE	CD300	CP6040	WR60406	WR60407	GL4060**
<b>DESCRIPTION</b>	Camdolly	Camchiller	Wiereracks w/6 rails	Wiereracks w/7 rails	Market display tray
<b>EXT. DIM.</b>	49 x 65 x 26,5 cm	60 x 40 x 4 cm	66 x 40,5 x 5,8 cm	66 x 40,5 x 5,8 cm	60 x 40 cm
<b>INT. DIM.</b>	43 x 59 cm	—	—	—	—
<b>CASE PACK</b>	1	1	1	1	12

\*\* Not sold in USA, Canada, Mexico, Central America and Caribbean. Vent Cap Patent Pending.

# Camcarts® – 46 X 66 cm Trays, Sheet Pans and Food Boxes

- Use to hold hot or cold bulk food stored on trays, sheet pans or in food boxes.
- Durable polyethylene and thick foam insulation retain safe food temperatures.
- Sturdy plastic, rust-proof latches are secured into molded-in mounting plates.
- Molded-in handle on the back for easy maneuvering.



## 1826DTC Double Cavity Cart for Trays and Sheet Pans

**Capacity:** 24 tray support rails on 4,92 cm centers (12 per cavity). Holds up to 24 each 46 x 66 cm trays or sheet/bun pans.

## 1826DBC Double Cavity Cart for Food Storage Boxes

**Capacity:** 26 support rails on 4,92 cm centers (13 per cavity). Holds 46 x 66 cm Food Storage Boxes.

**Camcart with Security Package**  
Specially designed for high security applications, with tamper-resistant hardware: metal hinges with non-removeable pins, metal latches with welded bails, lockable hasp and chassis plate.

**Colors:** Slate Blue (401), Coffee Beige (157), Dark Brown (131), Charcoal Gray (615).

**15,2 cm Casters:** 2 fixed, 2 swivel, 1 with brake.

**Note:** Cool metal sheet pans to 121°C before placing onto tray supports.

Venting plug is covered by US Patent D 553,717 S.

Only 1826DBC and 1826DBCSP are NSF Listed.



CODE	DESCRIPTION	EXTERIOR DIMENSIONS W x D* x H	INTERIOR DIMENSIONS W x D* x H
1826DTC	For trays & sheet pans	55 x 84,5 x 162 cm	46,4 x 67,3 x 64,6 cm
1826DBC	For food storage boxes	55 x 84,5 x 162 cm	46,4 x 67,3 x 64,9 cm
<b>Camcarts with Security Packages</b>			
1826DTCSP	For trays & sheet pans	55 x 84,5 x 162 cm	46,4 x 67,3 x 64,6 cm
1826DBCSP	For food storage boxes	55 x 84,5 x 162 cm	46,4 x 67,3 x 64,9 cm

**Case Pack:** 1 \* Exterior Depth measurement includes handle.

# Camcarriers® – 32,5 X 53 cm Trays, Sheet Pans and Food Boxes Camcarts® – 46 X 66 cm Trays, Sheet Pans and Food Boxes



1318MTC

## Camcarrier for Full-size Food Pans, Trays and Half-size Sheet Pans

- Holds up to 8 each 33 x 46 cm sheet pans or 3 each full-size 10 cm deep food pans.
- Molded-in handles.
- Stackable for storage and transport.
- Fits CD300 Camdolly.



1826LBC

## Camcart for Food Storage Boxes

- Holds 46 x 66 cm Food Storage Boxes.
- Capacity: 13 supports on 4,45 cm centers.
- Includes removable cutting board on top.



1826MTC

## Camcarrier for Trays and Sheet Pans

- Holds up to 6 each 46 x 66 cm sheet pans.
- Six tray supports on 5,4 cm centers.
- Molded-in handles.
- Fits CD1826MTC Camdolly.



1826LTC3

## Camcart for Trays and Sheet Pans

- Holds up to 7 each 46 x 66 cm trays or sheet pans.
- Seven tray supports on 9,5 cm centers for 7,62 cm clearance between trays.
- Includes removable cutting board on top.



1826LTCSP

## Camcart with Security Package (SP)

- Specially designed for high security applications.
- Features tamper-resistant hardware to protect both cart and contents.
- Includes removable cutting board on top.
- Includes chassis plates with 15,2 x 3,8 cm HD Casters.



1826LTC

## Camcart for Trays and Sheet Pans

- Holds up to 13 each 46 x 66 cm trays or sheet pans.
- Thirteen tray supports on 4,45 cm centers.
- Includes removable cutting board on top.

**Colors:** Slate Blue (401), Charcoal Gray (615), Coffee Beige (157), Dark Brown (131), Navy Blue (186).  
1826MTC and 1318MTC are available in Black (110).

**Strap Color:** Beige (000).

**Camdolly® Colors:** Slate Blue (401), Coffee Beige (157), Dark Brown (131), Black (110).

**CD1826MTC:** 12,7 cm Casters: 2 fixed, 2 swivel, 1 with brake.

**CD1826MTCCHB:** 12,7 cm Casters: 2 swivel, 1 with brake and 2 25,4 cm Easy Wheels.

**Standard Casters:** 15,2 x 3,2 cm, 2 fixed, 2 swivel, 1 with brake.

**Heavy Duty (HD) Casters:** 15,2 x 5 cm, 2 fixed, 2 swivel, no brake.

**Note:** Cool metal sheet pans to 121°C before placing onto tray supports.

Only 1826LBC and 1826LBCSP are NSF Listed.



CODE	DESCRIPTION	EXTERIOR DIMENSIONS W x D* x H	INTERIOR DIMENSIONS W x D* x H
1318MTC	For trays, sheet pans & GN Food Pans	42,5 x 62 x 57 cm	33,3 x 54 x 36 cm
1826MTC	For trays & sheet pans	55 x 74,5 x 57 cm	46,7 x 66,4 x 35,9 cm
<b>Camdolly</b>			
CD300	Camdolly for 1318MTC	53 x 70 x 23 cm	46 x 63,5 cm
CD1826MTC	Camdolly for 1826MTC	61 x 89 x 91 cm	55,9 x 72,4 cm
CD1826MTCCHB	Camdolly with Easy Wheels for 1826MTC	70 x 89 x 93,5 cm	55,6 x 72,5 cm
<b>Camcarts</b>			
1826LTC	For trays & sheet pans	55 x 81,5 x 95,5 cm	46 x 66,4 x 65,7 cm
1826LTC3	For trays & sheet pans	55 x 81,5 x 95,5 cm	46 x 66,4 x 65,7 cm
1826LBC	For Food Storage Boxes	55 x 81,5 x 95,5 cm	46 x 66,4 x 65,7 cm
<b>Camcarts with Security Package** (Includes Chassis Plat, 15,2 x 5 cm HD casters)</b>			
1826LTCSP	For trays & sheet pans	55 x 81,5 x 95,5 cm	46 x 66,4 x 65,7 cm
1826LBCSP	For Food Storage Boxes	55 x 81,5 x 95,5 cm	46 x 66,4 x 65,7 cm
<b>Securing Strap</b>			
1826STP	Securing Strap	—	—

**Case Pack:** 1 Venting plug is covered by U.S. Patent D 553,7175 S \* With handle.