

The Extra Heavy Duty Master Series' modular approach combines the convenience of custom kitchen design with proven, premium quality components to deliver world class functionality.

Featuring stainless steel construction front and sides, large front 'plate rail' 191mm deep and 2.5mm thick.

2 piece burners are easy to remove and clean with protected individual pilot lights and flame failure as standard. Large 683mm deep work surface fits 400mm pots easily and grate design allows pots to slide across the surface easily.

Large easy-to-use control knobs sit atop the fully porcelain interior standard oven that accepts full sized sheet pans in both directions with 4-position rack guides. A 42.2MJ 'H' oven burner with flame failure and a strong adjustable door.

STANDARD FEATURES


- 152mm chrome steel adjustable legs
- Stainless steel drip tray under open burners
- Piezo Spark ignition for oven
- Modular 1 1/4" front manifold
- 250mm stainless steel backguard
- Removable ring grates over burners

OPTIONAL FEATURES

- Stainless steel oven interior, side(s) or main back
- Fully grooved griddle (or grooved sections)
- Additional oven rack
- Gas regulator 3/4" or 1 1/4"
- Rear gas connection, 3/4", 1", or 1 1/4"
- 4 swivel casters with front brakes
- End caps and cover (NC, Specify)
- Dais base (not for use with "RC" oven)
- Convection oven base, add C to model, eg MST44RC
- Stainless steel common front rail up to 1728mm wide (2 or more units in a battery)
- Gas flex hose & quick disconnect (3/4", 1" or 1 1/4" x 5') w/restraining device
- Electric Spark ignition on all pilots Suffix -E models

MST44R & MST44S

864mm WIDE MASTER SERIES 4 BURNER RANGE & 4 BURNER WITH STORAGE BASE

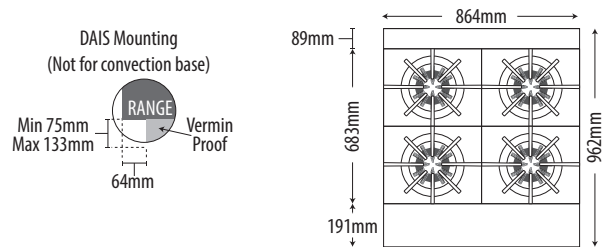

DIMENSIONS

External Dimension: 864W x 962D x 1174H mm

Working height : 924mm

Oven Interior : 667W x 737D x 343H mm

Combustible wall clearance: Side: 356mm, Rear: 152mm

TECHNICAL DATA

Gas Type: Natural or LP

Total Output:	Natural	LP
	189.8MJ	184.5MJ

Burner Ratings:	Natural	LP
Open Burner	36.9MJ	36.9MJ
Oven Burner	42.2MJ	36.9MJ

Gas Connection: 1 1/4"

Shipping weight: MST44R 200kg, MST44S 155kg

AGA approval number

SC380

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

