

## M1

### Compact Passthrough Dishwasher - 450mm Rack

W 630mm x D 650mm x H 1530mm

The popular choice in medium volume kitchens where space is limited. Suits economical 600mm bench depth for in-line or corner installation, now supplied with all-plastic 450mm racks.

#### Standard Features


- Now with 450mm all plastic racks
- 2.6 litres per cycle water consumption
- Up to 400 plates per hour
- Electromechanical controls
- Auto start on door closure
- 2 minute cycle auto-starts on door closure
- Double filtration via scrap trays and separate wash inlet filter
- Anti-drip door edge channels water away from operator
- Stainless steel arms with removable end caps for cleaning
- 370W wash pump recirculates wash water at nominal 220 litres per minute through upper and lower wash arms
- 3kW rinse and 2.5kW wash heating
- 430mm high wash chamber clearance
- Full length door springs allow fingertip lifting with tension of 2kg
- Adjustable and removeable tilting rack slide
- Robust stainless steel construction
- Fits 600mm deep bench
- 220mm leg clearance for access beneath machines
- Corner or in-line installation
- Watermark certified

#### Includes

- 1x 0428002 - 450mm dish rack
- 1x 0428001 - 450mm cup rack
- 1x C660503 - cutlery container accessories



The unit shall be a Washtech passthrough dishwasher with Watermark certification, suitable for in-line or corner installation. The unit shall be fitted with automatic fill and low level pump and element protection and automatically start on door closure a two minute complete operating cycle. Door clearance shall be 430mm. The unit shall be fitted with rotating upper and lower all stainless steel separate wash and rinse arms, all with removable end plugs for cleaning. Hot water consumption shall be 2.6 litres per operating cycle. The unit shall require connection to 15amp single phase electrical supply. The unit shall be supplied with 450mm all plastic cup and dishracks and shipped in 100% recyclable packaging. Height of machine shown includes height with maximum 60mm adjustable leg option in use.




# WASHTECH®

PROFESSIONAL WASH SYSTEMS

## M1

### Compact Passthrough Dishwasher - 450mm Rack

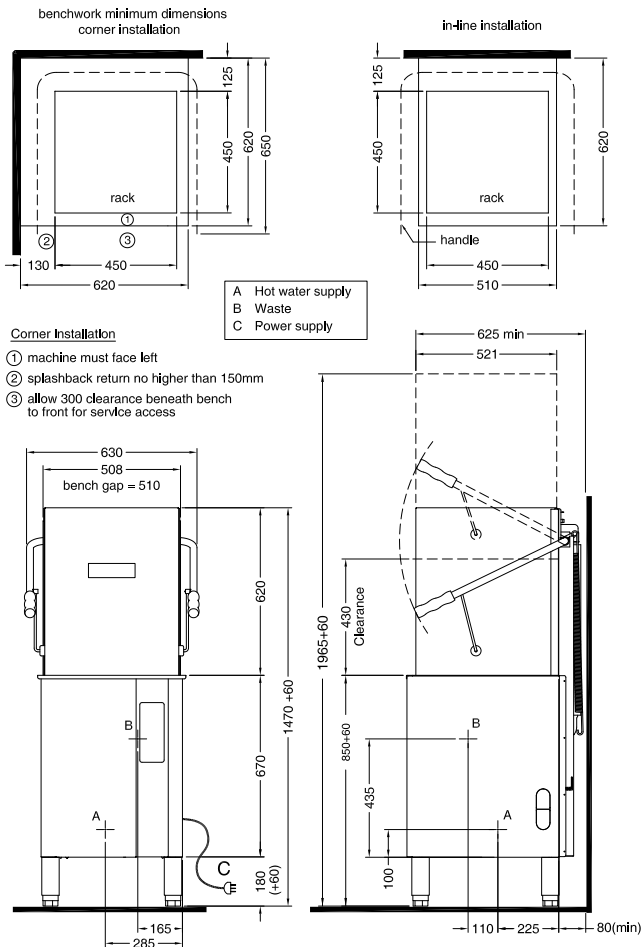

<b>A Hot Water</b>		<b>Dimensions</b>	
temperature	65°C	Width	630mm
connection	3/4" hose supplied	Depth	650mm
pressure	200-350kPa	Height	1530mm
flow	20 litres per min	Weight	80kg
quality	potable & soft	<b>Packed Dimensions</b>	
<b>B Waste</b>		Width	695mm
connection	1.5 BSP	Depth	750mm
line	2" BSP	Height	1440mm
<b>C Electrical</b>		Weight	101kg
Single phase 240V 50Hz	15 amp	Cubicmetres	0.77m <sup>3</sup>
	plugset supplied		

Refer operator manual for complete installation instructions



Australia  
www.moffat.com.au

Australia  
Moffat Pty Limited

Victoria/Tasmania  
740 Springvale Road  
Mulgrave, Victoria 3170  
Telephone 03-9518 3888  
Facsimile 03-9518 3833  
vsales@moffat.com.au  
www.moffat.com.au

New South Wales  
Telephone 02-8833 4111  
nswsales@moffat.com.au

South Australia  
Telephone 03-9518 3888  
vsales@moffat.com.au

Queensland  
Telephone 07-3630 8600  
qldsales@moffat.com.au

Western Australia  
Telephone 08-9202 6820  
bgarcia@moffat.com.au

