



Thanks to a continuous and regular flow, the water is distributed on a refrigerated surface designed to increase ice production. Three different sizes are available **FULL DICE, HALF DICE** and **LARGE DICE**

High production modular ice maker.
Up to 400kg production per 24/hr of dice cube.
Head only, stainless steel cabinet.
Complete with water & drain hoses.
15 AMPS, single phase power supply.



ICE PRODUCTION


Air Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C					
°F					
10°		360	395	420	430
50°		794	871	926	948
21°		340	370	390	400
70°		750	816	860	882
32°		280	305	312	320
90°		617	672	688	705
38°		225	250	257	265
100°		496	551	567	584

Water Cooled Unit

Air Temp.		Water Temperature			
		32°	21°	15°	10°
°C					
°F					
10°		315	347	365	370
50°		694	765	805	816
21°		300	332	350	355
70°		661	732	772	783
32°		280	315	327	335
90°		617	694	721	739
38°		270	305	317	325
100°		595	672	699	716


CUBE TYPE



10g
FULL CUBE
24mm x 22mm x 22mm



6g
HALF CUBE
24mm x 10mm x 29mm



17g
LARGE CUBE
24mm x 29mm x 29mm

Solid ice cube, suitable for quick drink cooling, available in three different sizes, **FULL DICE (M models)**, **HALF DICE (MH models)** and **LARGE DICE (ML models)**, can be used in various applications: ice buckets, whisky on the rocks and cocktails.

CONTROL PANEL

	Power
	Operating
	Bin Full / Washing
	Alarm
	High Pressure Alarm
	Reset Button / Washing

SUGGESTED STORAGE BIN



BH122+KBT25
Stainless steel storage bin.
406kg capacity.














DIMENSIONS



W x D x H (mm)
760 x 620 x 725

OPERATING REQUIREMENTS


Rejected Heat	4559 W
Air Volume	1180 m ³ /h
220-240/50/1	R404a GWP=3922
MIN	MAX
10°C (50°F)	40°C (104°F)
5°C (41°F)	35°C (95°F)
- 10 %	+ 10 %
1 Bar (14 psi)	5 Bar (70 psi)

SPECIFICATIONS



	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 lbs	 kg	 lbs	 Ton CO2 equiv.
M402 A		4360	2100	16	13.1	19.0	88	194	106	234	4.94
M402 W		4360	1900	16	10.6	210	83	183	101	223	2.55

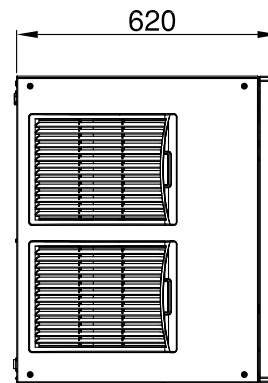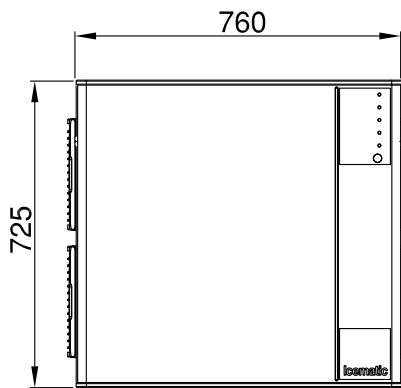

AIR COOLED

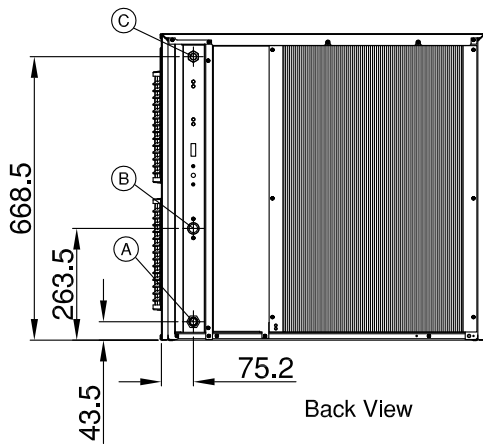

WATER COOLED

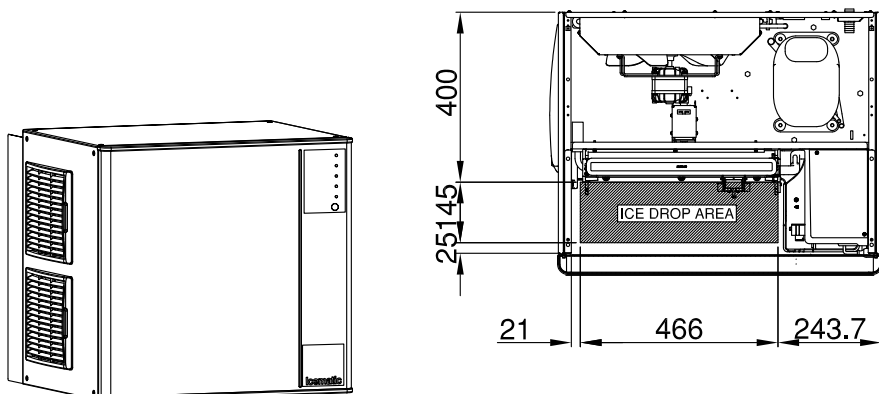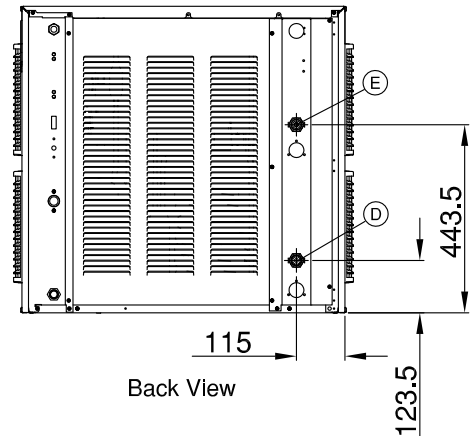

- (A) Water drain 20mm diam.
- (B) Potable water inlet 3/4" gas
- (C) Electrical cable supply
- (D) Water cooled inlet 3/4" gas
- (E) Water cooled outlet 3/4" gas