

MF Series Modular Flake Ice Maker – up to 265kg

MF 47 AS Superflake ice – residual water content 15%



Superflake ice
residual water content 15%



Note: Ice production rate is measured with the water temperature at 10°C and an ambient temperature of 21°C.


- Up to 265kg daily production rate
- Head only ice maker: requires a separate storage bin to store the ice produced
- Agion Technology resists the growth of microbes and the development of unpleasant odours
- Air cooled version
- Hermetic compressor
- Hydrocarbons R290 refrigerant gas
- Stainless steel auger and freezing cylinder (evaporator)
- Simple, reliable electromechanic controls
- Double protection – electronic rotation sensor & drive coupling
- Robust strengthen alloy ice breaker for greater extrusion pressure to deliver a dryer-quality of ice
- Low-water sensor protection
- Stainless steel finish, top cover in PS plastic with removable panels for ease of maintenance
- Removable side panels on all four sides for easy service maintenance
- Includes removable air filter, water and drain hose

Recommended Storage Bins

- NB 193 with CBT 22 EFCD cover – 129kg storage capacity
- NB 393 with CBT 30 EFSD cover – 178kg storage capacity
- NB 530 with CBT 30 EFSD cover – 243kg storage capacity
- NB 948 with CBT 48 FMCD cover – 406kg storage capacity

MF Series Modular Flake Ice Maker – up to 265kg/day

MF 47 AS

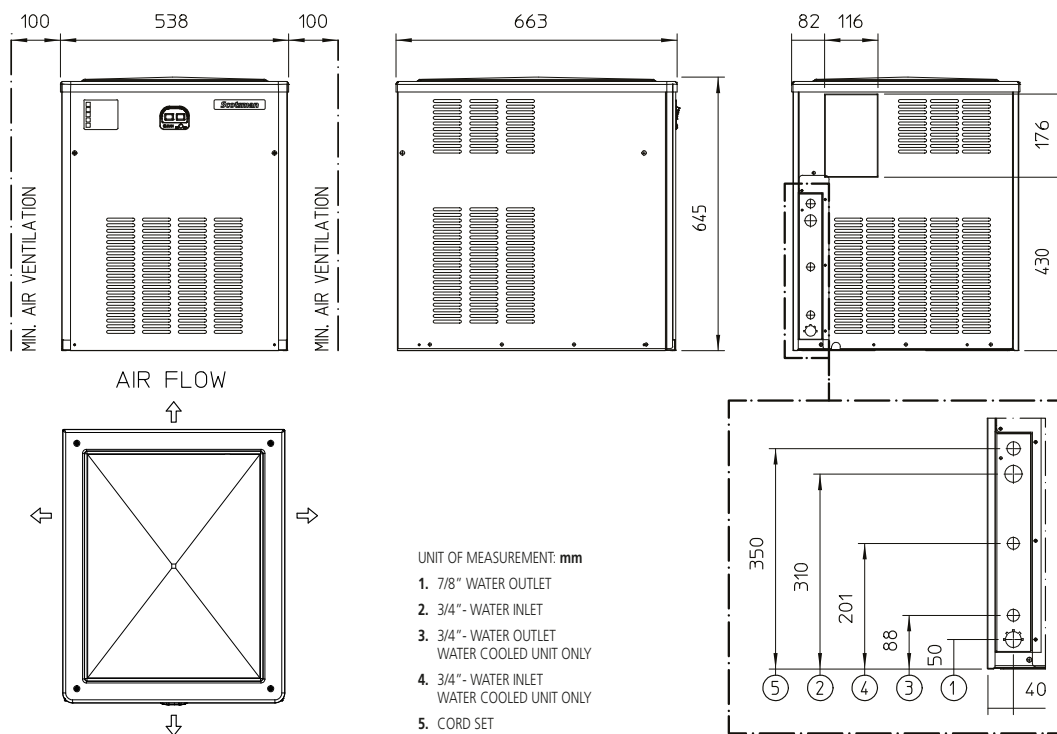

moffat.com.au

Australia
Moffat Pty Limited
Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9413 2400
wasales@moffat.com.au

Ice production per 24 hours

Ambient temperature / Water temperature

10°C / 10°C	21°C / 10°C	32°C / 21°C
300	265	200

Dimensions

Width: 538mm
Depth: 663mm
Height: 645mm
Nett weight: 78kg
Packed weight: 87kg

Water consumption

Air cooled version: 8.3 litres per hour

Electrical rating

Air cooled version: 230-240V, 1P+N+E, 50Hz, 1100W,
15A cordset supplied
No. Circuit wire: 3
Compressor: 830W
Energy consumption: 22.7kW/hr

Refrigerant type

R290

Installation distance from wall

Rear 100mm
Side 100mm

Operating requirement air temperature 10-43°C

Water connection requirements

Inlet connection: R 3/4"
Cold water: 5-38°C
Pressure: 100-500kPa
Water outlet connection: R 7/8"

Important Notice:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.



© Copyright Moffat Ltd
AU.SM.1801