

## One Drawer Underbench Freezer Station

**Series:** ProSpec  
**SKOPE ID:** PoFF1A-K5  
**Dimensions:** 455 mm (W) × 765 mm (D) × 845 mm (H)  
**Gross Volume:** 105 L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_



A robust single deep-drawer freezer designed to sit seamlessly alongside cooking stations and benchtops in high demand environments such as restaurants, clubs, pubs, and cafés. The freezer is engineered and certified to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-compliant 5L1 performance, storage temperatures are adjustable via the SKOPE-connect smartphone app from from -21°C to -15°C. The freezer is made from food-safe 304 AISI stainless steel throughout the interior and exterior ensuring durable construction. The high capacity, 380 mm deep drawer is ideal for storing bulk frozen items such as chips, fish and vegetables, and features an ergonomically designed 3 mm gauge stainless steel handle, and built-in barrel lock. The drawer is also compatible with 1/2 and 1/9 GN pans. The 765 mm deep cabinet with a full welded integrated worktop can be configured to suit multiple installation options. At 845 mm high (to the worktop), it provides the option to sit under a bench or for standalone use. Optional accessories include a 450 mm high detachable splash back with 2 fry basket channels (suitable for 4 fry baskets), and a removable drip tray. The energy efficient refrigeration system uses R290 natural refrigerant for low energy consumption, low heat discharge, and low noise output. The freezer includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The freezer is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant




GEMS



304 Stainless Steel



SKOPE-connect

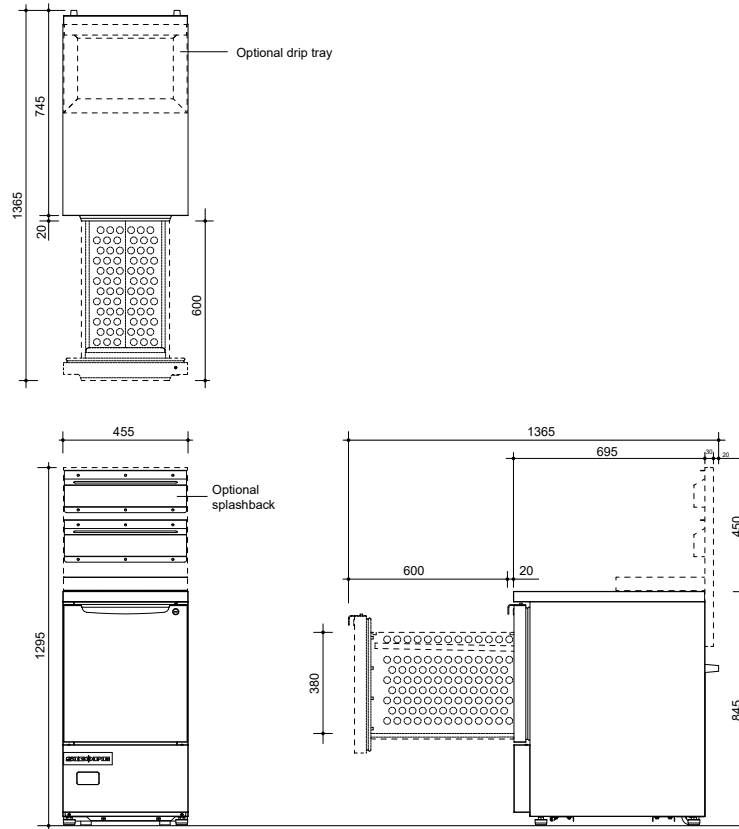

### Cabinet

<b>Range</b>	Underbench		
<b>Finish</b>	304 AISI stainless steel		
<b>Insulation</b>	Type	PU foam	
	Thickness (mm)	40	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
<b>Drawers</b>	Lock	Barrel lock	
	Width (mm)	285	Depth (mm) 505
<b>Lighting</b>	n.a.		

### Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	455	375	520
<b>Depth (mm)</b>	765	595	820
<b>Height (mm)</b>	845 (2 × castors, 4 × stabilising feet)	470	1000
<b>Weight (kg)</b>	60		72
<b>Gross Volume (L)</b>	105		
<b>Footprint (m<sup>2</sup>)</b>	0.3		

### Ventilation (mm)

<b>Top</b>	Not required	<b>Sides</b>	50	<b>Rear</b>	50
------------	--------------	--------------	----	-------------	----

### Performance

<b>Product Temperature Range (°C)</b>	-21 to -18 (adjustable* from -21 to -15)
<b>Maximum Ambient Temperature (°C)</b>	40
<b>Sound Level (dB(A))</b>	63.7

### Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	4
<b>Product Temperature Class</b>	L1 (less than -18°C)
<b>Total Energy Consumption</b>	3.50 kWh/24 h
<b>Annual Running Costs</b>	\$383 (@ \$0.30/kWh)

### Electrical

<b>Supply</b>	220 to 240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	2 m power cord with 3-pin, 10 amp plug
<b>Current Draw (A)</b>	2.0

### Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)		
<b>System Type</b>	Split system		
<b>Cartridge Weight (kg)</b>	n.a.		
<b>Refrigerant/Charge</b>	R290/100 g		
<b>Nominal Capacity (W)</b>	270 (ASHRAELBP32)		
<b>Heat Rejection (W)</b>	<b>Average</b>	146	<b>Peak</b> 152
<b>Defrost Type</b>	Manual		
<b>Drainage</b>	No plumbing required		

### Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	-5 mm to +10 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm

\* Accessible via the free SKOPE-connect™ app.



P.FSF.1.D1  
on the SKOPE website