

900 mm Heated Food Display

Type: ActiveView
Dimensions: 900 mm (W) × 750 mm (D) × 1300 mm (H)*
Gross Volume: 303 L

* Height with legs is adjustable from 1295 to 1325.

Project: _____

Item #: _____




A premium 900 mm wide heated food display merchandiser designed for hospitality spaces requiring high-impact presentation and temperature control, such as cafés, petrol and convenience, and retail. Standard storage temperatures range from 65°C to 67°C or are adjustable via the SKOPE-connect smartphone app from 65°C to 85°C. Constructed with an energy-efficient spiral coil which offers fast heat-up, from 0°C to 65°C in just 15 minutes, the cabinet is supplied with stainless steel wire shelves on low-profile stainless steel arms. The shelving is height-adjustable and can be tilted with upstands and ticket holders on the front edge. Each shelf is fitted with LED light strips to highlight the food on display while additional full-height lighting ensures optimum visibility. All lighting can also be dimmed and set to automatically turn on or off to save energy. Access to the cabinet is via two fully removable sliding doors that stay open over 75 mm, and auto-soft-close at 75 mm and less. At 1300 mm height on castors, the cabinet has a convenient serve-over height. The removable side and front base panels support seamless integration into shopfitting designs. The cabinet includes a smart controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more. The cabinet is certified to all Australian and New Zealand electrical safety standards.



Warranty



SKOPE-connect

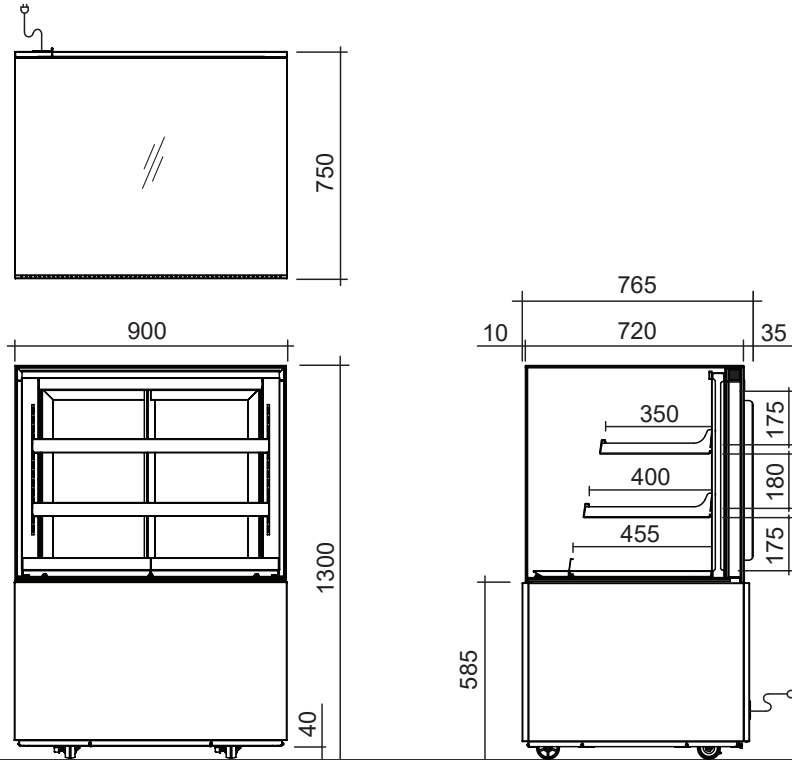

Cabinet

| | | | |
|-----------|---|--------------------|-----|
| Range | Heated | | |
| Finish | 304 AISI stainless steel | | |
| Doors | Type | Glass sliding door | |
| | Opening Size | Height (mm) | 590 |
| | | Width (mm) | 735 |
| Shelving | Four wire shelves | | |
| | 2 × adjustable height top shelf (345W × 380D), 2 × adjustable height bottom shelf (395W × 380D) | | |
| Lighting* | 3 × 700 mm, 6.1 W and 2 × 600 mm, 5.2 W LED strips | | |

Dimensions†

| | External | Internal | Packed |
|-----------------------------|-------------------------|----------|--------|
| Width (mm) | 900 | 870 | 960 |
| Depth (mm) | 750 | 520 | 790 |
| Height (mm) | 1300 (standard castors) | | |
| | 1295 to 1325 (legs) | 670 | 1600 |
| | 1250 (plinth mount) | | |
| Weight (kg) | 100 | | 111 |
| Gross Volume (L) | 303 | | |
| Footprint (m ²) | 0.68 | | |

Performance

| | |
|----------------------------------|----------|
| Product Temperature Range (°C) | 65 to 85 |
| Maximum Ambient Temperature (°C) | 40 |
| Sound Level (dB(A)) | 48 |

Electrical

| | |
|------------------|---|
| Supply | 220 to 240 volts a.c., 50 Hz, single phase supply |
| Cord | 2 m power cord with 3-pin, 10 amp plug |
| Current Draw (A) | 7.0 |

Ventilation (mm)

| | | | | | |
|-----|--------------|-------|--------------|------|--------------|
| Top | Not required | Sides | Not required | Rear | Not required |
|-----|--------------|-------|--------------|------|--------------|

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

| Linear dimensions | Single cabinet | Multiple cabinets | |
|-------------------|-----------------|-------------------|------------------|
| | | At each joint | At each end wall |
| Less than 1 metre | ±5 mm | ±5 mm | +15 mm |
| More than 1 metre | -5 mm to +10 mm | -5 mm to +10 mm | +15 mm |

* Accessible via the free SKOPE-connect™ app.



FDH.900
on the SKOPE website