

SW400Smartwash Undercounter Warewasher



The New Smartwash Range of undercounter warewasher is the first attractive, intelligent, one touch warewashing system in Australia that offers incredibly sustainable results in water and energy consumption. This professional warewasher offers the first one touch control panel with digital wash and rinse temperature displays for easy HACCP recording for accurate food safety reporting. These machines are sleek and compact because we know space is of the essence and presentation is key. Only Smartwash offers you a warewasher with one touch control, drain pump fitted as standard, a self cleaning cycle and 4 wash cycle options, offering you an economical and sustainable solution for your business.

SW400 standard features and benefits

- Up to 1200 glasses per hour. Compartmented racks available to suit tall stem glasses
- User friendly TOUCH control panel with digital wash and rinse temperature displays for easy HACCP recording
- Water saving uses only 1.9 litres per cycle
- Four wash cycles of 90, 120 & 150 seconds + special (time variable wash cycle chosen by operator - time limit 12 min)
- Built-in detergent and rinse aid pump fitted as standard
- Self cleaning cycle, easily removable spray arms
 & filters together with a pressed wash tank
- Double skinned door drastically reduces heat & sound emissions
- Self-Diagnostic system for accurate fault finding & reduced ownership costs
- Thermostop Function to ensure set rinse temperature is achieved

Standard accessories

- 430 x 360 mm glass rack
- 4 x 150 mm legs (optional use)

Optional accessories part codes

R402-1 glass/cup rack 400 x 400

P-400 small plate insert
















Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice. $\frac{1}{2} \int_{-\infty}^{\infty} \frac{1}{2} \int_{-\infty}^{\infty} \frac{1}{$





SW400 Smartwash Undercounter Warewasher

A. Drain ø22mm, 1.8m flexible drain discharge hose B. Hot Water Supply 3/4" BSP, 1.5m hose C. Power cord. 2m

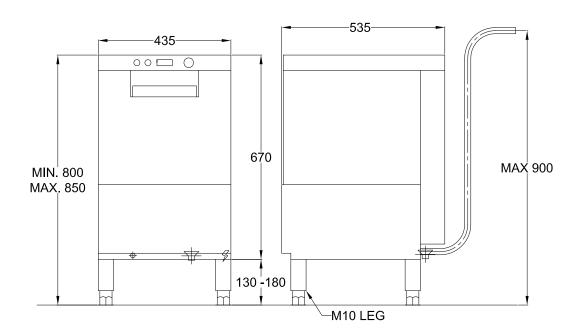





SW400 SPECIFICATIONS

DIMENSIONS (WxDxH)	436 x 535 x 670mm
DOOR ENTRY	320mm
RACK SIZE (WxD)	400 x 400mm or 14" x 17" or 14" x 14"
ELECTRIC CONNECTION	240V / 50Hz / 1 Phase 15A Plug / 2 m
WATER CONNECTION	3/4" x 1.5 m Braided Hose
DRAIN CONNECTION	20 mm x 1.5 m ID Hose
RATING	3.6 kW
WATER SUPPLY	65°C / 2-4 bar (28-58 psi)
WASH CYCLE	90 / 120 / 150 sec + special
WATER CONSUMPTION	Approx. 1.9L per cycle

DOOR CONSTRUCTION	Double-Skinned
WASH / RINSE ARMS	Hydrodynamic Parallel
CONTROL PANEL	Advanced Electronic Soft-Pad
SELF CLEANING CYCLE	YES
TEMPERATURE GAUGE	Fitted
SELF-DIAGNOSTIC SYSTEM	Fitted
RINSE-AID & DETERGENT PUMP	Fitted
DRAIN PUMP	Fitted
THERMOSTOP, TANK STRAINERS	Fitted
WEIGHT	32 kg

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.

