

SW500 Smartwash Undercounter Warewasher



The New Smartwash Range of undercounter warewasher is the first attractive, intelligent, one touch warewashing system in Australia that offers incredibly sustainable results in water and energy consumption. This professional warewasher offers the first one touch control panel with digital wash and rinse temperature displays for easy HACCP recording for accurate food safety reporting. These machines are sleek and compact because we know space is of the essence and presentation is key. Only Smartwash offers you a warewasher with one touch control, drain pump fitted as standard, a self cleaning cycle and 4 wash cycle options, offering you an economical and sustainable solution for your business.

SW500 standard features and benefits

- Up to 500 x 350mm plates per hour, Up to 2000 glasses per hour
- User friendly TOUCH control panel with digital wash and rinse temperature displays for easy HACCP recording
- Water saving uses only 2.5 litres per cycle
- Four wash cycles of 60, 90 & 180 seconds + special (time variable wash cycle chosen by operator - time limit 12 min)
- Generous 365mm door height opening will take the largest of plates, pizza trays, kitchen utensils and tall stem glassware
- Extra special 6 minute "scrub cycle" for more soiled product
- Self cleaning cycle, easily removable spray arms
 & filters together with a pressed wash tank
- Double skinned door drastically reduces heat & sound emissions
- Self-Diagnostic system for accurate fault finding & reduced ownership costs
- Thermostop Function to ensure set rinse temperature is achieved

Standard accessories

- plate and glass rack 500 x 500 mm
- cuttlery container






















Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.





SW500 Smartwash Undercounter Warewasher

- A. Drain connection ø25mm M, 2 m flexible hose
- B. Water connection G 3/4" M, 2 m S/S braided hose
- C. Electrical connection 240V, 15A plug, 2 m cable

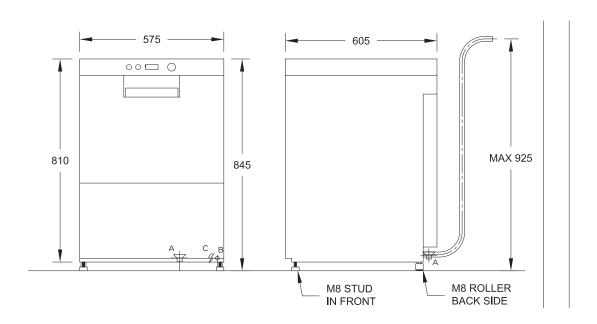





SW500 5PECIFICATIONS

DIMENSIONS (WxDxH)	575 x 605 x 820 mm
DOOR ENTRY	365 mm
RACK SIZE (WxD)	500 x 500 mm
ELECTRIC CONNECTION	240V / 50Hz / 1 Phase 15A Plug / 2 m
WATER CONNECTION	3/4" x 2 m Braided Hose
DRAIN CONNECTION	25 mm x 2.5 m ID Hose
RATING	3.2 kW
WATER SUPPLY	65°C / 2-4 bar (28-58 psi)
WASH CYCLE	60 / 90 / 180 sec + special
WATER CONSUMPTION	Approx. 2.5L per cycle
MEAL SERVICE	30 - 60 pax
DOOR CONSTRUCTION	Double-Skinned

WASH / RINSE ARMS	Hydrodynamic Parallel
CONTROL PANEL	Advanced Electronic Soft-Pad
SELF CLEANING CYCLE	YES
TEMPERATURE GAUGE	Fitted
SELF-DIAGNOSTIC SYSTEM	Fitted
RINSE-AID & DETERGENT PUMP	Fitted
DRAIN PUMP	Fitted
2 X REAR STAINLESS STEEL CASTORS	Fitted
THERMOSTOP, TANK STRAINERS	Fitted
WEIGHT	56 Kg

Please note, due to ongoing product development and improvement, we reserve the right to change product design and specification at any time without notice.

