

SWT262TAUS

FRESH WATER SYSTEM DISHWASHER - THREE PHASE (15 AMP OPTIONAL)

Double basket configuration



PROFESSIONAL STANDARD, DOMESTIC STYLE USE

With its special configuration of the **two baskets, similar to a domestic dishwasher**, Smeg SWT262TDAUS combines the features and benefits of a **truly professional dishwasher**, with the simplicity of use for users who may not be familiar with the use of tank dishwashers and installations requiring a domestic kitchen "look".

HIGHEST LEVEL OF HYGIENE IN THE FOODSERVICE INDUSTRY

With **final rinse up to 93 degrees for 10 minutes**, Smeg SWT262TDAUS offers **disinfection cycles with A0 levels up to 12,000** and hygiene levels comparable to the ones required for medical standards.

WE BELIEVE IN OUR QUALITY

All dishwashers are manufactured in **our state of the art factory in Italy**, where we monitor all phases of design, engineering and production.

PRODUCT FEATURES

- **Easy to use, double basket configuration, similar to a domestic dishwasher, for a wider range of users and applications**
- **Professional dishwasher, 85°C rinse temperature**
- **Special disinfection cycles, 93°C rinse temperature**
- Total water exchange in every phase during cycle - both washing and rinsing
- Electronic control
- Double skin construction in AISI 304 stainless steel
- Moulded wash tank, rack guides and door
- Counterbalanced door with spring assisted hinges, full surround door gasket and no supporting rods
- Safety door locking mechanism, with end of cycle automatic opening
- Drain pump
- Rinse pump to guarantee constant and optimal rinse pressure, with electronic temperature control.
- Soft start wash pump
- Stainless steel filtration system
- **Steam condensing system**
- **Electrical connection: Three phase - 7.0kW (Standard) / Single phase, 15 Amp (optional). Turn to page 2 for more information.**
- **24 months parts and labour warranty**



SWT262TAUS

FRESH WATER SYSTEM DISHWASHER - THREE PHASE (SINGLE PHASE OPTIONAL)

Double basket configuration

TECHNICAL SPECIFICATIONS

Dimensions (mm) (WxDxH)

Dimensions (mm) (WxDxH)	600x600x850
Basket	Double basket configuration
Type of interface	electronic
Door/hood structure	double skinned insulated
Supplied water temperature (°C)	From cold to 60°
Tank heating element (W)	6,300
Rinse pump	Yes
Rinse temperature (°C)	85° or 93°

Drain pump

Drain pump	Yes
Rinse aid dispenser	Integrated in the door
Detergent dispenser	Integrated in the door
Total power (W)	7.0 kW (Three phase setting)
Electrical connection	Standard: 400V 3N~/12A/7,0 kW/50Hz Optional: 230V 3~/19A/7,0kW/50Hz 230V 1N~/16A/3,5kW/50Hz 230V 1N~/12A/2,8kW/50Hz


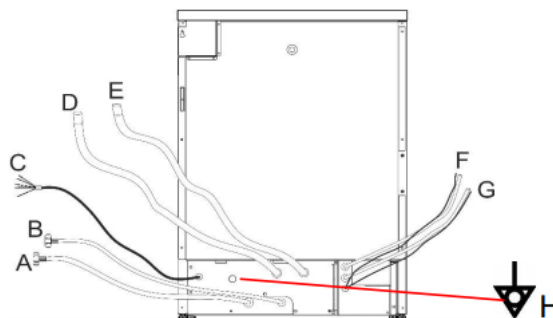


fig. 3 – Diagram, back panel connections and hookup.

CONNECTION WIRING DIAGRAM KEY

A HOT WATER SUPPLY HOSE (RED)	E DISHWASHER DRAIN HOSE
B COLD WATER SUPPLY HOSE (BLUE)	F PERISTALTIC PUMP P1
C POWER SUPPLY CABLE	G PERISTALTIC PUMP P2
D STEAM CONDENSER DRAIN HOSE	H SYSTEM EARTH

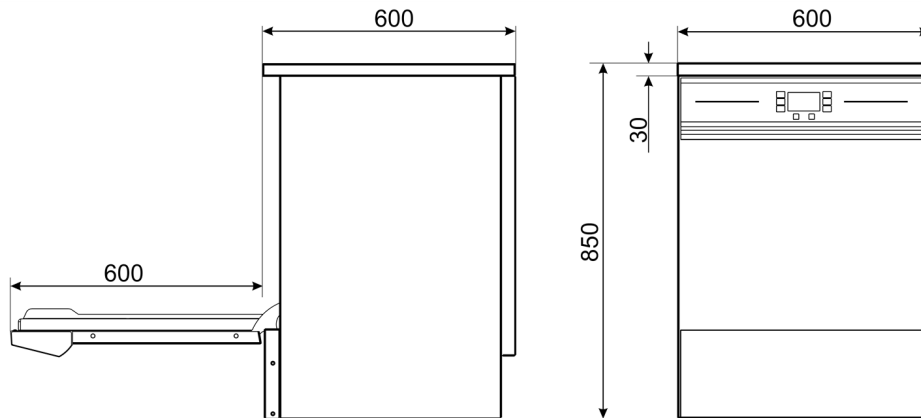

UNI EN ISO 9001
9130-Smeg

UNI EN ISO 14001
9191-SME2

DHSAS 18001
9192-SME3