



## BREMA TB852A

### SELF CONTAINED PEBBLES ICE MAKER

Brema's TB range of self-contained ice makers produces pebble-shaped ice particles and stores them in an internal storage bin.

The Brema TB852A is an under bench ice machine that produces 90kg of pebbles ice per 24 hours and has storage capacity of 20kg.

Pebbles ice is ideal for crushing, blending and mixing into cocktails, fruit juices, smoothies and frappés. The ice has a fast and efficient refrigerating effect and is easy to handle and dose.



### STANDARD FEATURES

- 85kg production per 24 hours
- 20kg storage capacity
- Produces pebble-shaped ice
- Production rated at 21°C air and 15°C water
- Hospital grade stainless steel outer
- Fully insulated internal storage bin
- Disappearing door
- Electromechanical operation
- Powerful gear motor and auger system



SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

*from the world of Comcater!*


National Head Office  
156 Swann Drive  
Derrimut VIC 3030  
Tel: +61 3 8369 4600  
Fax: +61 3 8369 4695

Melbourne  
96-100 Tope Street  
South Melbourne VIC 3205  
Tel: +61 3 8369 4600  
Fax: +61 3 8699 1299

Sydney  
20/4 Avenue of the Americas  
Newington, NSW 2127  
Tel: +61 2 9748 3000  
Fax: +61 2 9648 4762

Brisbane  
1/62 Borthwick Avenue  
Murarrie QLD 4172  
Tel: +61 7 3399 3122  
Fax: +61 7 3399 5311

Perth  
Unit 4/35 Westchester Road  
Malaga WA 6090  
Tel: +61 8 9248 9290  
Fax: +61 8 9248 1903

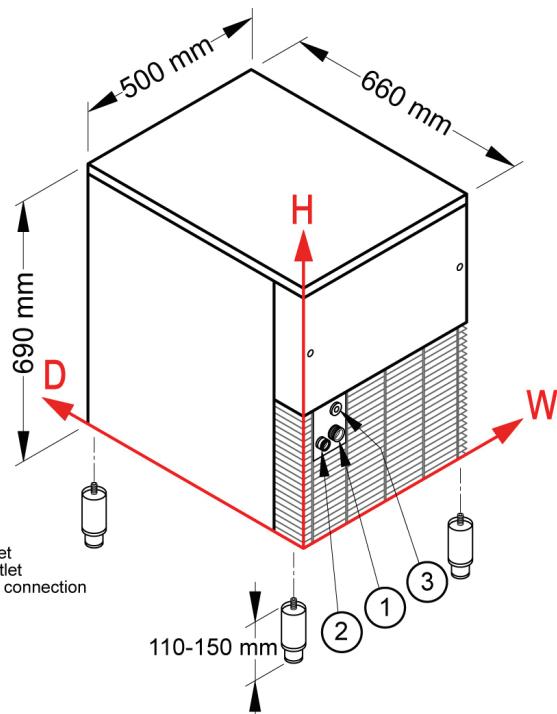

## DIMENSIONS

500W x 660D x 690\*H mm  
\* add 110-150mm for adjustable legs

## CONNECTIONS

3/4" Water inlet, 24mm Water outlet & Electrical connection

## TECHNICAL DATA

Production 24h	85 kg
Storage Capacity	20 kg
Cooling System	Air
Ice Type	Pebbles
Refrigerant	R404A
Electrical Consumption	550W
Power Requirements	240V 10amp
Weight	59 kg

## STANDARD ACCESSORIES

- Water Inlet Hose
- Drainage hose
- External Water Filter
- Pressure Limiting Valve
- Plastic Ice Scoop
- Adjustable stainless steel legs (4)

## CONNECTIONS

	W	H
Water inlet	99 mm	158 mm
Water outlet	48 mm	151 mm
Electrical connection	87 mm	230 mm
Clearances	Rear: 100 mm	Sides: 100 mm

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.