

Heavy Duty Supermarket Glass Sliding Lid Freezers 506L

SD-506K

Analogue temperature controller for precise, user-friendly operation. Designed for performance in Climate Class 4 conditions, ensuring reliability in extreme temperatures. Perfect for ice cream display and storage, showcasing products attractively. Features a static cooling unit to maintain consistent temperatures for quality preservation. 70mm insulation ensures optimal temperature retention and energy efficiency.



Key Features



GEMS Compliant

Greenhouse and energy minimum standards



Static Cooling

Keeps ice cream perfectly textured and tasty.



Curved Glass Design

Enhances ice cream display elegance and variety.



LOW-E Glass Design

High-efficiency insulation energy-saving anti-fog/condensation.

Details



Includes 6 heavy-duty baskets for organized storage and easy product access.



Curved glass design for elegant visibility and enhanced product display.

Code	GEMS Star Rating	Dimensions (W x D x H mm)	Weight (kg)	Temperature Class	Max. ambient temp/RH%	Power (W/A)
SD-506K	2	1446x745x845	81	-18°C to -22°C	30°C/55%	230/10

FHE After-sales Service and Support

AUS Phone : 1300 887 055

Email: service@fedservices.com.au

NZ Phone : 0800 081 847

Email: service@fedproducts.co.nz



Brilliant LED Lighting

Showcases items with several individually lights.



Heavy-Duty Basket

For organised storage and easy access to products.



Security Design

Equipped with a lock for enhanced security.



Manual Defrost




Manual defrost is required, allowing for maintenance and cleaning control.



Leak Prevention Function


Keeps the display cabinet dry.

Product Design Overview

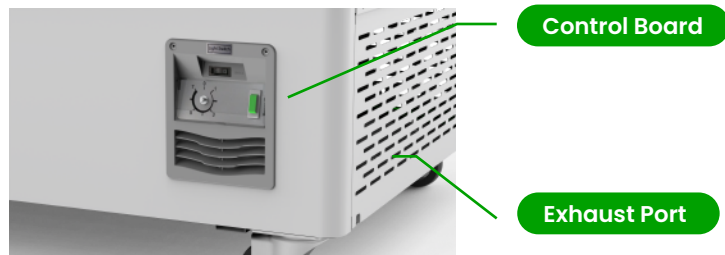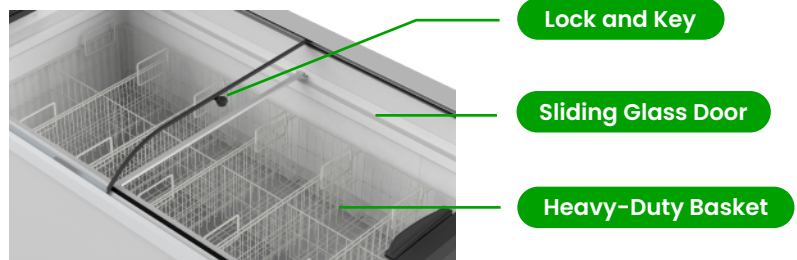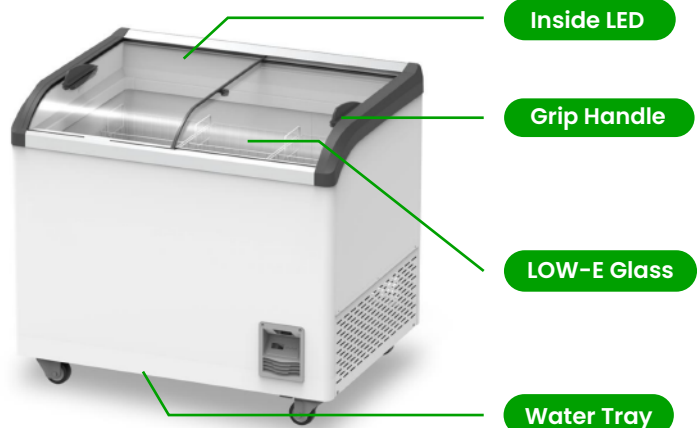

Product Summary

Analogue temperature controller for precise, user-friendly operation. Designed for performance in Climate Class 4 conditions, ensuring reliability in extreme temperatures. Perfect for ice cream display and storage, showcasing products attractively. Features a static cooling unit to maintain consistent temperatures for quality preservation. 70mm insulation ensures optimal temperature retention and energy efficiency.

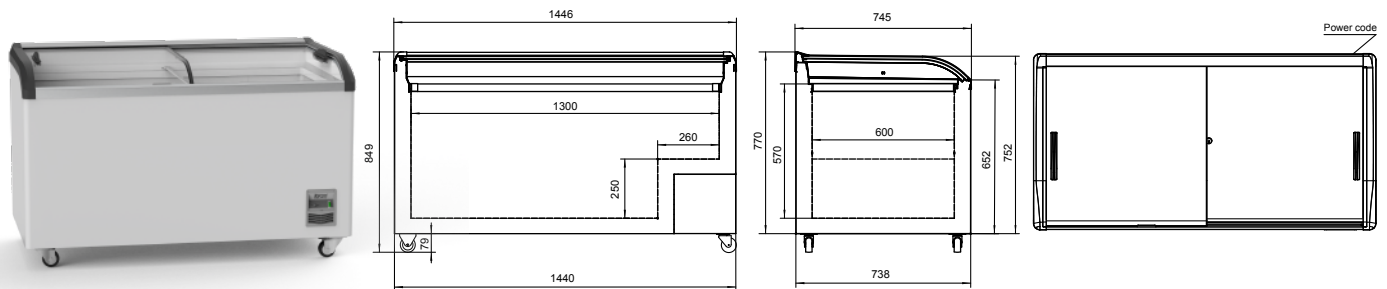

FEATURES AND FUNCTIONALITIES

Cooling System	Static Cooling
Compressor Unit	Cubigel
Energy Efficiency	3.36 kWh/24h
Exterior & Interior of the Cabinet	Exterior Body White, Interior Body White, Powder coated steel.
Ergonomical Design	LED lights; Water tray 0.45L; 4 casters for easy movement; Compartmentalised design; Lock and key.
Durable Door Profile	LOW-E and tempering; Curved glass; Sliding door.
Baskets	6 Baskets, Plastic coating steel.
Blowing Agent	70mm, Cyclopentane.

TECHNICAL DESCRIPTION

Power Cord	10Amp plug and lead
Power cord length	2.9m (2.2m outside cabinet)
Power Supply	240V/50Hz; 230W
Rated Current	1.8A
Evaporator Design	Galvanized Steel Tube
Compressor cooling capacity(W)	400
LED Lights	1x15W LED strip, upper inner liner

SAFETY & STANDARDS

IEC/IECEE CB; GEMS(Refrigerated Cabinets) Determination 2024 ; EN 16901:2016;

PHYSICAL QUALITIES

Width (mm)	1446
Depth (mm)	745
Height (mm)	845
Packing Width (mm)	1494
Packing Depth (mm)	775
Packing Height (mm)	895
Net Weight (kg)	81
Total Capacity (L)	477
Total Display Area [m ²]	0.76

PERFORMANCE SPECIFICATION

Max. ambient temp/RH	30°C 55%
Climate Class	4
Temperature Class	-18°C to -22°C
Rated kWh/year	1226.4
Refrigerant	R290 (110g)
Energy Efficiency Index (EEI)	84,2
Star Rating / GEMS Rating	2 (4C1)

WARRANTY

2 Years Parts & Labour Plus 2 Years Parts Only Warranty When Products Registered Within 14 Days of Invoice



IEC 60335-1:2010+A1+A2
IEC 60335-2-89:2019



Customisation Options

Customised corporate solutions available upon request



Suitable For Various Scenarios



Supermarkets



Convenience Stores



Cafes



Ice Cream Shops



Outdoor Shops



Restaurants