

UGA415M-1

EASYLINE **FULLY INSULATED** UNDERBENCH GLASSWASHER - 1.5 AMP

400x400 mm basket, with adapter for 17"x14" basket (included)



GUARANTEED WASH PERFORMANCE

In commercial dishwashers, the rinse is the most important part of the wash cycle, as it is the only one performed with clean water. This is the reason why, at Smeg, we believe all commercial dishwashers must have **a rinse pump on board**, the only way to guarantee that optimal and constant pressure and temperature are maintained throughout the rinse cycle.

WE BELIEVE IN OUR QUALITY

All dishwashers are manufactured in our state of the art factory in Italy, where we monitor all phases of design, engineering and production.

PRODUCT FEATURES

- **Double skin construction in AISI 304 stainless steel**
- Moulded wash tank, rack guides and door
- **Counterbalanced door with spring assisted hinges, full surround door gasket and no supporting rods**
- **Adaptor for multiple baskets, including 17" x 14"**
- **HTR (High Temperature Rinse) system with atmospheric boiler and rinse pump**
- 2.3 litres water rinse cycle
- Over 30% water exchange every cycle
- Drain pump with triple stage dynamic filtration system
- Door opening height: 300mm
- Electronic controls with 4 wash programs
- Shortest wash program 90 seconds
- Soft start wash pump
- Automatic self-cleaning cycle
- Shut-off at the end of drain cycle
- Thermostop system to ensure correct rinse temperature
- Adjustable peristaltic pumps for detergent and rinse-aid injection
- Self-diagnostic system with error messages
- **4 x 150mm legs (included)**
- 1.5 Amp plug with 2 metre lead
- **24 months parts and labour warranty**



SUPPLIED ACCESSORIES

- PB40G01 - 400x400mm flat-bottomed basket
- WB40D01 - 400x400mm basket. 8 plate Ø315mm
- RB40A2 - Adaptor for multiple baskets, including 17" x 14"

OPTIONAL ACCESSORIES

- WB40G01 - 400x400mm flat-bottomed basket
- WB40G02 - 400x400mm basket. Ø90mm max stem-glass


UGA415M-1

EASYLINE **FULLY INSULATED** UNDERBENCH GLASSWASHER - 1.5 AMP

400x400 mm basket, with adapter for 17"x14" basket (included)

TECHNICAL SPECIFICATIONS

Dimensions (mm) (WxDxH)	460x530x710 (approx 855mmH with legs)	Minimum supply pressure (bar)	2.5
Basket (mm)	400x400	Drain pump	Yes
Door clearance (mm)	300	Rinse aid pump	Peristaltic
Type of interface	electronic	Detergent pump	Peristaltic
Door/hood structure	double skinned insulated	Programme 1 (sec)	90*
Supplied water temperature (°C)	From cold to 60°	Programme 2 (sec)	150*
Tank volume (litres)	7	Programme 3 (sec)	240*
Filtering system	Tank filter + selective filter	Special programmes	Total renewal of the water inside the tank Extra rinse Self-cleaning
Boiler volume (litres)	4	Thermostop	Yes
Wash pump (W)	300	Total power (W)	3,200
Tank temperature (°C)	60°	Electrical connection	Single Phase 1.5A 230V~/14A/3.2kW/50Hz
Rinse pump	Yes	Basket number	
Rinse temperature (°C)	85°	dishes	-
Adjustable temperatures	Yes	universal / glasses	2 x PB40G01
Net weight	46kg	cutlery	1 x PHOOS01

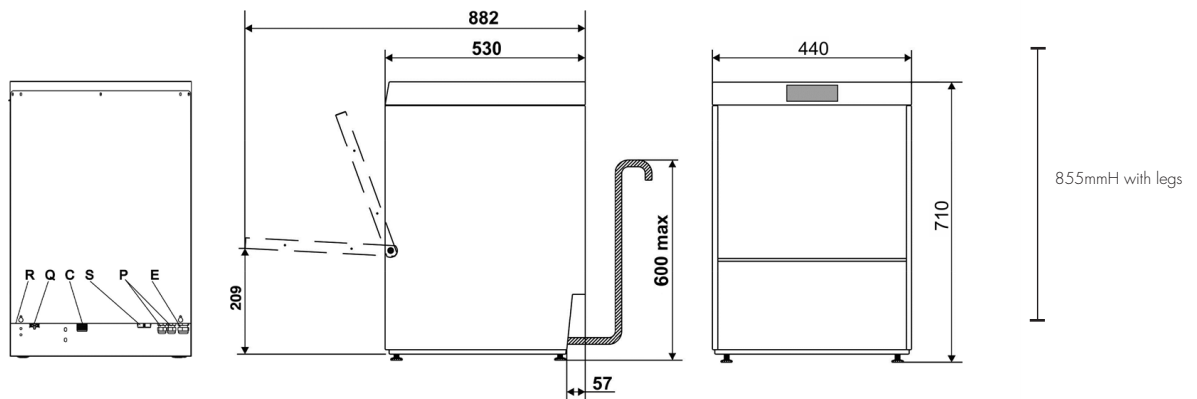

CONNECTION WIRING DIAGRAM KEY

R	LOWER BACK PANEL	P	PERISTALTIC PUMP HOSES
C	EXTERNAL DISPENSER POWER SUPPLY CABLE ENTRY POINT	E	ELECTRICITY SUPPLY CABLE
S	DRAIN HOSE	T	FILLER HOSE
Q	EARTH TERMINAL		

* Supplied water temperature >50°C and <60°C and three-phase electrical connection whenever possible.

* Indicative wash times



UNI EN ISO 9001
9130-Smeg

UNI EN ISO 14001
9191-SME2

DHSAS 18001
9192-SME3