

UD

Professional Undercounter Dishwasher – 500mm rack
W 575mm x D 595mm x H 845mm

The Washtech UD is a versatile and highly efficient undercounter dishwasher that combines the latest technology with heavy duty stainless steel construction and components. With economical water consumption rates and powerful rinse heating, the UD provides excellent wash results while being light on operating costs and the environment.

The UD's intuitive electronic controls provide Soft Start, EcoPower, cycle customisation, chemical adjustability and immediate fault diagnosis. Capable of washing 1,500 glasses or 1,080 plates per hour, the UD is the perfect machine for busy cafes, childcare centres or office kitchens.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech UD will not let you down.

Standard Features

- 1, 2 and 3 minute cycles
- Capacity of up to 1,500 glasses / 1,080 plates per hour
- Low hot water consumption of 2.2 litres per cycle
- Sanitising rinse of >82°C
- Heavy-duty stainless steel construction
- Heavy-duty stainless steel componentry including double filtration via scrap trays and separate wash inlet filter
- Advanced electronic controls
- Soft start wash cycle
- Quick connection including:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - Drain pump with outlet hose
 - 15 amp plugset
- Self-cleaning cycle
- EcoPower – reduced temperatures and energy consumption when machine is idle
- Insulated door – reduced noise and heat emissions
- Watermark approved backflow prevention
- Moffat's comprehensive 5-2-1 Warranty

Includes:

- 1 x 500mm dish rack (600 70028)
- 1 x 500mm cup rack (600 70029)
- 1 x cutlery container (C660503)



UD



moffat.com.au
washtech.com.au

Moffat Pty Limited

VIC/TAS/SA
70 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Fax 03-9518 3833
vsales@moffat.com.au




NSW
Telephone 02-8833 4111
nswsales@moffat.com.au

QLD
Telephone 07-3630 8600
qldsales@moffat.com.au

WA
Telephone 08-9413 2400
wasales@moffat.com.au

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd
Version: WUD0030 2101

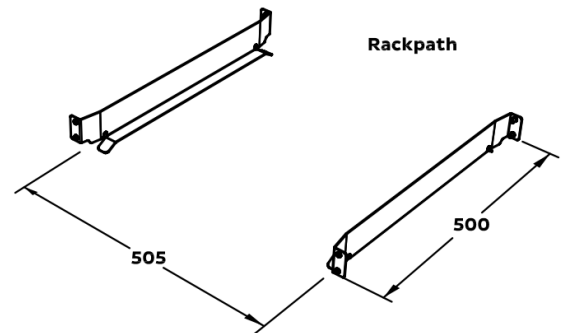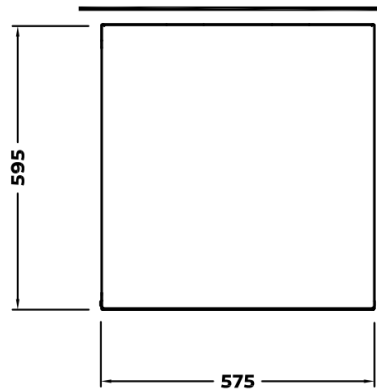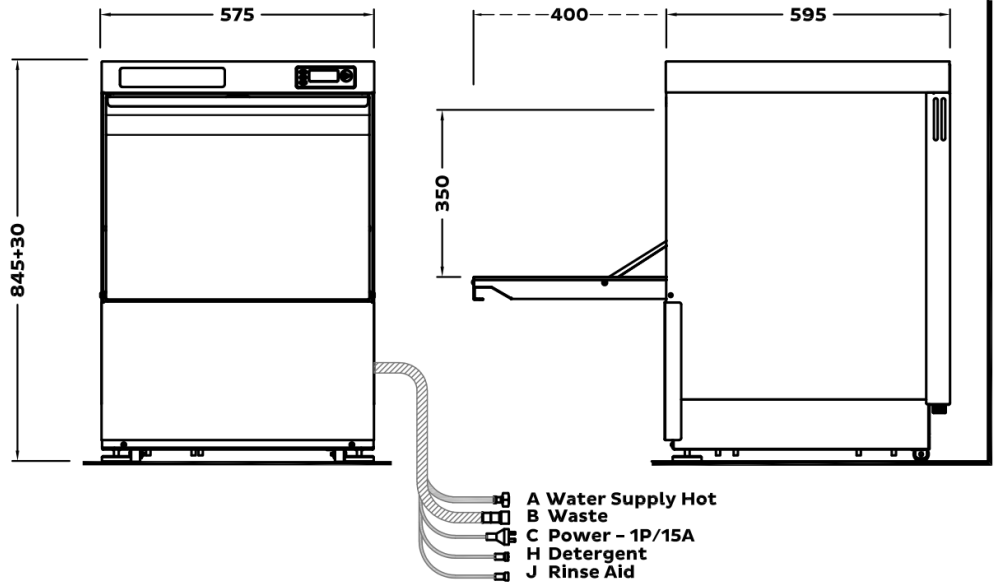

A - Hot Water

Temperature 65°C
Connection 3/4" male; hose supplied
Pressure 200-350kPa
Flow 20 litres per min
Quality Potable - refer table
Backflow Prevention AVB
Consumption 2.2 litres per cycle*

B - Waste - Pumped Drain

Connection 20mm male; drain pump outlet hose supplied (up to 25mm connection)
Outlet Temp No greater than wash water temp (default = 60°C to 65°C)

C - Electrical	V	Hz	A/phase	Max kW
Single Phase	240	50	15	3.37

Dimensions

Dimensions	Machine	Packed
Width (mm)	575	620
Depth (mm)	595	675
Height (mm)	845	940
Weight (kg)	75	78
Volume (m ³)		0.39

Water Quality

Water Quality	Min	Max
pH	7	8
Hardness (ppm)	20	100
Cl ⁻		100
SO ₄		400
Fe		0.1
Mn		0.5
Cu		0.05
Cl ₂		0.1

Isolating switch must be within 1m of, and not directly behind the machine.

* Water consumption rates may vary based on site conditions.

Refer to operator manual for installation instructions.