

# Cold Food Displays - Self Serve

## W.CFSSxx



\*Trolley and panels sold separately

### Product Information:

- Unique front and rear acrylic lift-up doors can be manually locked into upright position to act as sneeze guards
- Designed for a maximum of 3 hours continuous use with doors open. Doors must be closed between service
- Unique blown air design passes a cold air blanket over the top of the food. The cold air then returns under and around the food pans creating an even cooling effect
- Features a full length evaporator coil. Adjustable digital controller designed to hold temperature accurately between 2°C and 5°C
- Top mounted interior lighting
- Designed to operate at ambient temperatures up to 32°C
- Undermount refrigeration unit supplied with drain hose from well for connection to waste
- Insulated tank with double skin stainless steel construction
- Takes gastronorm pans up to 100mm deep (sold separately)
- Other pan sizes and combinations available
- Wide range of functional accessories available



### Note:

- All Woodson units are designed for use with Woodson pans. Other suppliers pans may fit, however this is not guaranteed
- Cabinets require ventilation for built in cold displays

### Specifications

Model	W.CFSS23	W.CFSS24
Height	787mm	787mm
Width	1074mm	1399mm
Depth	800mm	800mm
Power	0.94kW (10A plug & lead fitted)	0.99kW (10A plug & lead fitted)
Gas	R134a	R134a

Model	W.CFSS25	W.CFSS26
Height	787mm	787mm
Width	1724mm	2049mm
Depth	800mm	800mm
Power	1.08kW (10A plug & lead fitted)	1.08kW (10A plug & lead fitted)
Gas	R134a	R134a

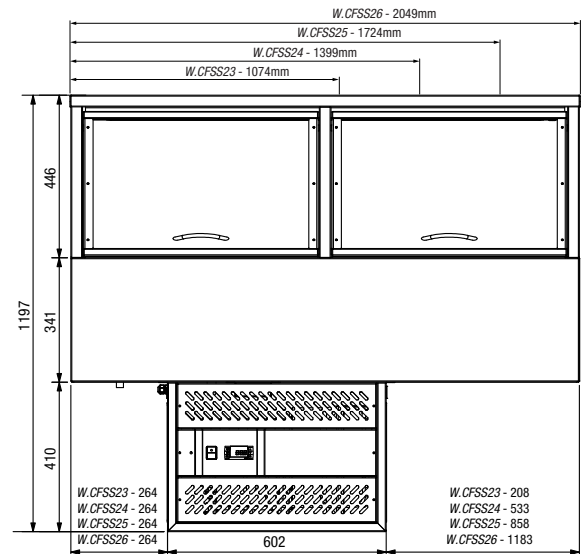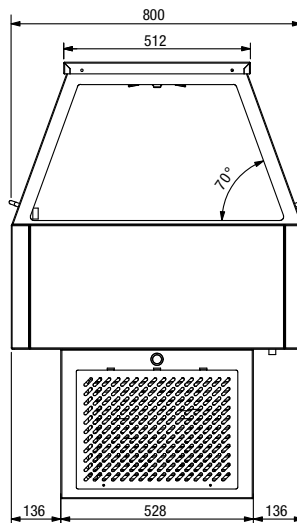

Due to continuous product research and development, the information contained herein is subject to change without notice.

Revision: F - 21/05/2021

[www.stoddart.com.au](http://www.stoddart.com.au)  
[www.stoddart.co.nz](http://www.stoddart.co.nz)