



# AUTOBOIL 5 LITRE WHITE

## Order Code 405052

Wall mounted instant boiling water appliance with integrates 0.2 micron MicroPurity™ filtration. The Autoboil® employs twin chamber boiling water steam-heat-boost™ technology to recycle energy from steam to pre-heat the incoming cold water. The Autoboil® has inbuilt self-calibration technology, utilises highly accurate electronic temperature control and incorporates a programmable digital display with 2 energy saving modes. The main boiling water tank is wrapped with high performance insulation to ensure the healthiest water and optimum efficiency. The Autoboil® is equipped with an external two-way classic tap.



Manufacturing Code	405052
--------------------	--------



Water Pressure	Min 70kPa - Max 500kPa
Water Connection	12.7mm BSP
Power Rating	2.4kW 220-240 V 50Hz
Dimensions	H473mm x W329mm x D201mm
Product Approvals	WaterMark, CE
Warranty	2 years

## Installation Requirements

1. Must be installed by a suitably qualified person in accordance with manufacturers instructions and with all relevant plumbing and electrical regulations.
2. In some hard water areas where mineral scale accumulation can become a problem, consideration should be given to the maintenance required, adding a high capacity filtration or water softening system should be considered.

## Installation Detail

BKL2\_OWB Gen4 Autoboil, Hydroboil (Small)

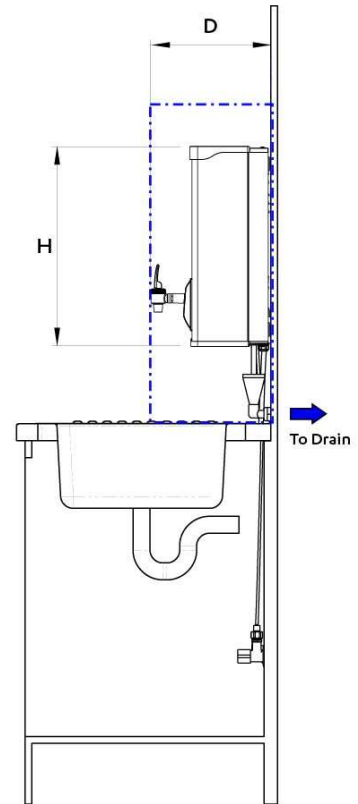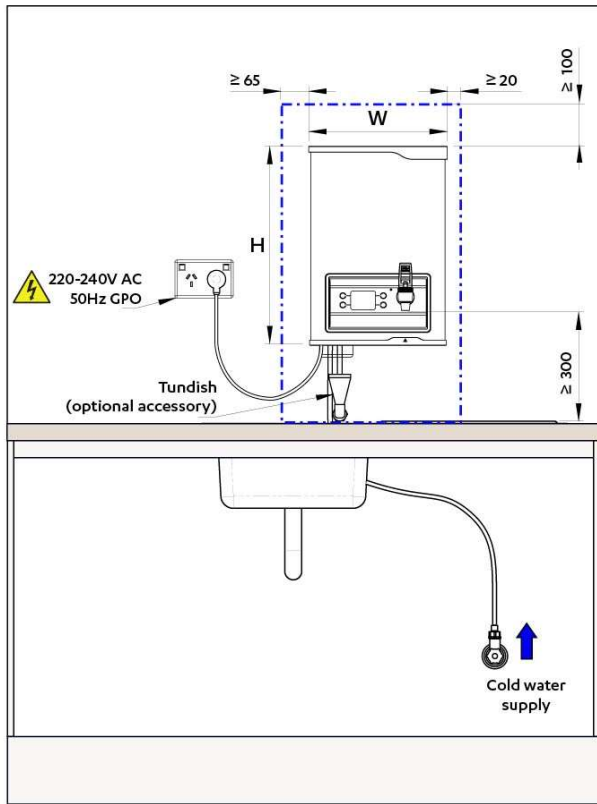

Code (AU)	Code (NZ)	Description	W	D	H
403052	403652	3 Litre Autoboil	300	280	439
405052	405652	5 Litre Autoboil	329	298	473
407052	407652	7.5 Litre Autoboil	329	304	586

SCALE 1:6