



**ANSIR
SYSTEMS**

Power Curve Tech Specs



ansir.com.au




+61 (03) 9768 3303



sales@ansir.com.au



6 Latchford Rd
Cranbourne West VIC 3977
Australia

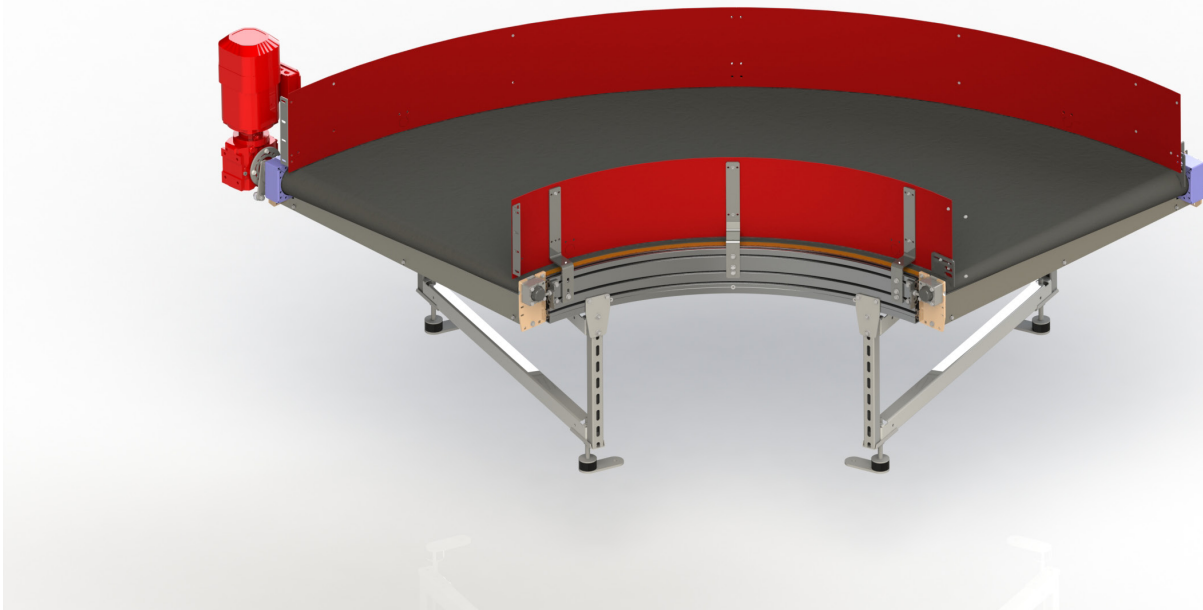

Function

The curve conveyor is used to change direction within the conveyor system and provide a smooth flow of baggage.

Features

- Standard angles: 15°, 30°, 45°, 90°, 120°, 135° and 180°. Other angles over 15° may be provided on request.
- Chain driven positive drive and no slippage.
- Quick belt change without removing the drive motor.
- Suitable for a wide range of temperatures when compared with other friction drive unit.

Key Parameters

Sort Rate

Conveyor speeds of more than 3 m/sec

Centerline Radius

1690mm

Belt Width

1060mm between side guides

Conveyor Belt

Flexam EF 10/2+A22 Black AS FR

Maximum Loading

75kg per metre