


MASONRY FLEXIBLE ANCHORS

25 Park Drive, Dandenong, Vic 3175 Phone (03) 9768 3111 Email info@brunswicksales.com.au www.brunswicksales.com.au

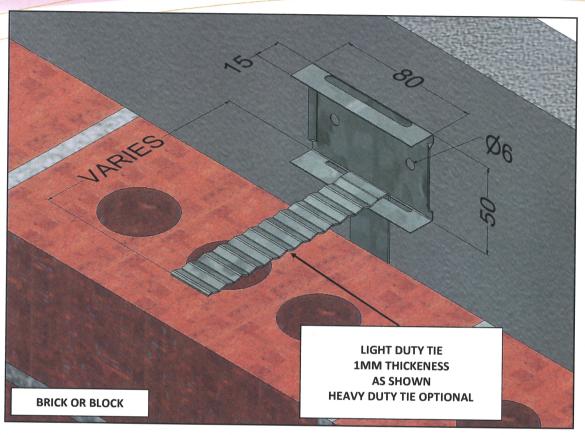

ATTACHING MASONRY VENEERS TO POURED CONCRETE

SKU: MFA 6

This new MFA 6 backing plate is now designed with two separate sized slots, one for a L.D. Tie, that being a 2mm slot and for H.D Ties a 4mm slot is provided

MFA 6 provides a secure means of attaching masonry veneers to poired concrete structural elements while permitting in-plane differential movements to safely occur. Available to normal or heavy duty specification. It is installed closed down for clay brickwork, open for concrete or calcium silicate masonry.

Available in Galvanised Steel Z600 or Stainless Steel
Light Duty = 1.0mm thickness, Heavy Duty = 3.0mm Thickness
Lengths: Made to Order

TECHNICAL DATA

BDRI - Report dated 1/12/76

- Updated 24/7/90

HD tie 20mm x 3mm

At 1.5mm deflection Compression Characteristic strength 0.44 KN Tension Characteristic strength 0.47 KN

